

State Feedback Control

Xu Chen

University of Washington



Motivation

- ▶ At the center of designing control systems is the idea of feedback.
- ▶ In such transfer-function approaches as lead-lag and root locus methods, the primal goal is to achieve a proper map of closed-loop poles with output feedback.

Key questions:


- ▶ How much freedom do we have for state-space systems?
- ▶ Are there fundamental system properties that yield higher achievable performance?
- ▶ How to implement the design algorithms?

General feedback structure

Consider an n -dimensional state-space system

$$\Sigma : \begin{cases} \dot{x}(t) = Ax(t) + Bu(t) \\ y(t) = Cx(t) + Du(t) \end{cases} \quad x(t_0) = x_0$$

where $x \in \mathbb{R}^n$, $u \in \mathbb{R}^r$, and $y \in \mathbb{R}^m$.

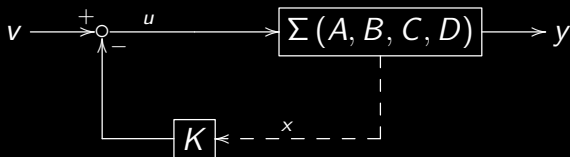


state-feedback law:

$$u = -Kx + v \quad (1)$$

- ▶ v : new input
- ▶ $K \in \mathbb{R}^{r \times n}$: n -number of states, r -number of inputs

Goal

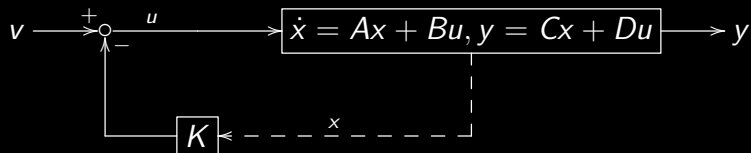

- ▶ closed-loop system:

$$\Sigma_{cl} : \begin{cases} \dot{x}(t) = (A - BK)x(t) + Bv(t) \\ y(t) = (C - DK)x(t) + Dv(t) \end{cases} \quad x(t_0) = x_0 \quad (2)$$

- ▶ key closed-loop property: eigenvalues of $A - BK$.
- ▶ How freely can we place the eigenvalues of $A_{cl} = A - BK$?

Eigenvalue placement by state feedback

Fact: If $\Sigma = (A, B, C, D)$ is in controllable canonical form, we can completely change all the eigenvalues of $A - BK$ by choice of state-feedback gain matrix K .

- Problem setup: single-input single-output system in c.c.f.

$$H(s) = \frac{\beta_{n-1}s^{n-1} + \dots + \beta_1s + \beta_0}{s^n + \alpha_{n-1}s^{n-1} + \dots + \alpha_1s + \alpha_0} + d, \quad \Sigma = \left[\begin{array}{c|c} A & B \\ \hline C & D \end{array} \right]$$

$$A = \begin{bmatrix} 0 & 1 & 0 & \dots & 0 \\ 0 & 0 & 1 & 0 & \vdots \\ \vdots & \dots & \ddots & \ddots & 0 \\ 0 & \dots & \dots & 0 & 1 \\ -\alpha_0 & \dots & \dots & -\alpha_{n-2} & -\alpha_{n-1} \end{bmatrix}, \quad B = \begin{bmatrix} 0 \\ \vdots \\ 0 \\ 1 \end{bmatrix}$$
$$C = [\beta_0 \quad \beta_1 \quad \dots \quad \dots \quad \beta_{n-1}], \quad D = d$$

$$\det(sI - A) = s^n + \alpha_{n-1}s^{n-1} + \dots + \alpha_1s + \alpha_0 \quad (3)$$

Eigenvalue placement by state feedback: c.c.f.

- ▶ Goal: achieve desired closed-loop eigenvalue locations p_1, \dots, p_n , i.e.

$$\det(sI - (A - BK)) = (s - p_1)(s - p_2) \cdots (s - p_n) \quad (4)$$

$$= s^n + \gamma_{n-1}s^{n-1} + \cdots + \gamma_1s + \gamma_0 \quad (5)$$

- ▶ Let $K = [k_0, k_1, \dots, k_{n-1}]$. The structured A and B give

$$BK = \begin{bmatrix} 0 \\ 0 \\ \vdots \\ 0 \\ 1 \end{bmatrix} [k_0, k_1, \dots, k_{n-1}] = \begin{bmatrix} 0 & 0 & 0 & \cdots & 0 \\ 0 & 0 & 0 & 0 & \vdots \\ \vdots & \cdots & \ddots & \ddots & 0 \\ 0 & \cdots & \cdots & 0 & 0 \\ k_0 & \cdots & \cdots & k_{n-2} & k_{n-1} \end{bmatrix}$$

$$A - BK = \begin{bmatrix} 0 & 1 & 0 & \cdots & 0 \\ 0 & 0 & 1 & 0 & \vdots \\ \vdots & \cdots & \ddots & \ddots & 0 \\ 0 & \cdots & \cdots & 0 & 1 \\ -\alpha_0 - k_0 & \cdots & \cdots & -\alpha_{n-2} - k_{n-2} & -\alpha_{n-1} - k_{n-1} \end{bmatrix}$$

Eigenvalue placement by state feedback: c.c.f.

A

$$\begin{bmatrix} 0 & 1 & 0 & \dots \\ \vdots & \ddots & 1 & \vdots \\ 0 & \dots & 0 & 1 \\ -\alpha_0 & \dots & \dots & -\alpha_{n-1} \end{bmatrix}$$

$\det(sI - A)$

$$s^n + \alpha_{n-1}s^{n-1} + \dots + \alpha_1s + \alpha_0$$

Eigenvalue placement by state feedback: c.c.f.

A	$A - BK$
$\begin{bmatrix} 0 & 1 & 0 & \dots \\ \vdots & \ddots & 1 & \vdots \\ 0 & \dots & 0 & 1 \\ -\alpha_0 & \dots & \dots & -\alpha_{n-1} \end{bmatrix}$	$\begin{bmatrix} 0 & 1 & 0 & \dots \\ \vdots & \ddots & \ddots & 0 \\ 0 & \dots & 0 & 1 \\ -\alpha_0 - k_0 & \dots & \dots & -\alpha_{n-1} - k_{n-1} \end{bmatrix}$
$\det(sI - A)$	
$s^n + \alpha_{n-1}s^{n-1} + \dots + \alpha_1s + \alpha_0$	

Eigenvalue placement by state feedback: c.c.f.

A				$A - BK$			
0	1	0	\dots	0	1	0	\dots
\vdots	\ddots	1	\vdots	\vdots	\ddots	\ddots	0
0	\dots	0	1	0	\dots	0	1
$-\alpha_0$	\dots	\dots	$-\alpha_{n-1}$	$-\alpha_0 - k_0$	\dots	\dots	$-\alpha_{n-1} - k_{n-1}$
$\det(sI - A)$				$\det(sI - (A - BK))$			
$s^n + \alpha_{n-1}s^{n-1} + \dots + \alpha_1s + \alpha_0$				$s^n + (\alpha_{n-1} + k_{n-1})s^{n-1} + \dots + (\alpha_0 + k_0)$			

Eigenvalue placement by state feedback: c.c.f.

Goal (recap): achieve desired closed-loop eigenvalue locations p_1, \dots, p_n , i.e.

$$\begin{aligned}\det(sI - (A - BK)) &= (s - p_1)(s - p_2) \cdots (s - p_n) \\ &= s^n + \gamma_{n-1}s^{n-1} + \cdots + \gamma_1s + \gamma_0\end{aligned}$$

$$\det(sI - (A - BK)) = s^n + \underbrace{(\alpha_{n-1} + k_{n-1})}_{\text{target: } \gamma_{n-1}} s^{n-1} + \cdots + \underbrace{(\alpha_0 + k_0)}_{\text{target: } \gamma_0}$$

► hence

$$k_0 = \gamma_0 - \alpha_0$$

$$\vdots$$

$$k_{n-1} = \gamma_{n-1} - \alpha_{n-1}$$

Eigenvalue placement by state feedback: c.c.f.

Eigenvalue-placement Algorithm

- 1 determine desired eigenvalue locations p_1, \dots, p_n
- 2 calculate desired closed-loop characteristic polynomial
$$(s - p_1)(s - p_2) \cdots (s - p_n) = s^n + \gamma_{n-1}s^{n-1} + \cdots + \gamma_1s + \gamma_0$$
- 3 calculate open-loop characteristic polynomial
$$\det(sI - A) = s^n + \alpha_{n-1}s^{n-1} + \cdots + \alpha_1s + \alpha_0$$
- 4 define the matrices:
$$K = [\gamma_0 - \alpha_0, \dots, \gamma_{n-1} - \alpha_{n-1}]$$

Powerful result: if the system is in controllable canonical form, we can arbitrarily place the closed-loop eigenvalues by state feedback!

General eigenvalue placement by state feedback

- ▶ What if the given state-space realization $\Sigma = (A, B, C, D)$ is not in the required form?
- ▶ We can then transform it to c.c.f. via a similarity transformation.
- ▶ **Powerful fact:** if system $\Sigma = (A, B, C, D)$ is controllable, then we can arbitrarily place the closed-loop eigenvalues via state feedback.

Discrete-time case

- ▶ the eigenvalue assignment of discrete-time systems is analogous:
 - ▶ system dynamics:

$$\begin{aligned}x(k+1) &= Ax(k) + Bu(k) \\ y(k) &= Cx(k)\end{aligned}$$

- ▶ controller: $u(k) = -Kx(k) + v(k)$
 - ▶ closed-loop dynamics:

$$x(k+1) = Ax(k) - BKx(k) + Bv(k) = (A - BK)x(k) + Bv(k)$$

- ▶ arbitrary closed-loop eigenvalue assignment if system is controllable

Numerical example

$$x(k+1) = \begin{bmatrix} 1 & 1 & -2 \\ 0 & 1 & 1 \\ 0 & 0 & 1 \end{bmatrix} x(k) + \begin{bmatrix} 1 \\ 0 \\ 1 \end{bmatrix} u(k)$$
$$y(k) = [2 \ 0 \ 0] x(k)$$

```
%MATLAB
```

```
A = [1,1,-2;0,1,1;0,0,1];
```

```
B = [1;0;1];
```

```
p = [0;0.1;0.2];
```

```
K = place(A, B, p)
```

```
#Python
```

```
import control as ct
```

```
import numpy as np
```

```
A = np.array([[1,1,-2],[0,1,1],[0,0,1]])
```

```
B = np.array([[1],[0],[1]])
```

```
p = [0,0.1,0.2]
```

```
K = ct.place(A, B, p)
```

```
print(K)
```

The case with output feedback

- ▶ if the full state is not measurable, state feedback control is not feasible
- ▶ consider output feedback

$$\begin{cases} \dot{x} &= Ax + Bu \\ y &= Cx \\ u &= -Fy + v \end{cases} \Rightarrow \dot{x} = Ax - BFy + Bu = (A - BFC)x + Bv$$

- ▶ $A - BFC$ not as structured as $A - BK$
- ▶ arbitrary closed-loop eigenvalue assignment not feasible

The case with output feedback

Example

Controllable mass-spring-damper system

$$\begin{aligned} \frac{d}{dt} \begin{bmatrix} x_1 \\ x_2 \end{bmatrix} &= \begin{bmatrix} 0 & 1 \\ -\frac{k}{m} & -\frac{b}{m} \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \end{bmatrix} + \begin{bmatrix} 0 \\ \frac{1}{m} \end{bmatrix} u \\ &\stackrel{u^* \triangleq \frac{u}{m}}{=} \begin{bmatrix} 0 & 1 \\ -\frac{k}{m} & -\frac{b}{m} \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \end{bmatrix} + \begin{bmatrix} 0 \\ 1 \end{bmatrix} u^* \end{aligned}$$

- ▶ arbitrary closed-loop eigenvalue assignment if $u^* = -k_1 x_1 - k_2 x_2$, namely $U^*(s) = -k_1 X_1(s) - k_2 X_2(s) = -(k_1 + k_2 s) X_1(s) \Rightarrow$ a proportional plus derivative (PD) control law
- ▶ if with only proportional control, $u^* = -k_1 x_1$, arbitrary closed-loop eigenvalue assignment is not possible