

## AMath 483/583 — Lecture 21 — May 13, 2011

### Today:

- OpenMP and MPI versions of Jacobi iteration
- Gauss-Seidel and SOR iterative methods

### Next week:

- More MPI
- Debugging and totalview
- GPU computing

**Read:** Class notes and references

`$CLASSHG/codes/openmp/jacobi1.f90`

`$CLASSHG/codes/openmp/jacobi2_omp.f90`

`$CLASSHG/codes/mpi/jacobi2_mpi.f90`

R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

### Notes:

## Jacobi iteration

$$(U_{i-1} - 2U_i + U_{i+1}) = -\Delta x^2 f(x_i)$$

### Solve for $U_i$ :

$$U_i = \frac{1}{2} (U_{i-1} + U_{i+1} + \Delta x^2 f(x_i)).$$

**Note:** With no heat source,  $f(x) = 0$ ,  
the temperature at each point is average of neighbors.

Suppose  $U^{[k]}$  is a approximation to solution. Set

$$U_i^{[k+1]} = \frac{1}{2} (U_{i-1}^{[k]} + U_{i+1}^{[k]} + \Delta x^2 f(x_i)) \text{ for } i = 1, 2, \dots, n.$$

**Repeat** for  $k = 0, 1, 2, \dots$  until convergence.

Can be shown to converge (eventually... **very slow!**)

R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

### Notes:

## Jacobi with OpenMP – coarse grain

### General Approach:

- Fork threads only once at start of program.
- Each thread is responsible for some portion of the arrays, from `i=istart` to `i=ieind`.
- Each iteration, must copy `u` to `uold`, update `u`, check for convergence.
- Convergence check requires coordination between threads to get global `dumax`.
- Print out final result after leaving parallel block

See code in the repository or the notes:

`$CLASSHG/codes/openmp/jacobi2_omp.f90`

R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

### Notes:

R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

## Jacobi with MPI

Each process is responsible for some portion of the arrays,  
from `i=istart` to `i=ien`.

No shared memory: each process only has part of array.

Updating formula:

$$u(i) = 0.5d0 * (uold(i-1) + uold(i+1) + dx**2*f(i))$$

Need to exchange values at boundaries:


Updating at `i=istart` requires `uold(istart-1)`

Updating at `i=ien` requires `uold(istart+1)`

Example with  $n = 9$  interior points (plus boundaries):

Process 0 has `istart = 1, iend = 5`

Process 1 has `istart = 6, iend = 9`



R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

## Jacobi with MPI

Other issues:

- Convergence check requires coordination between processes to get global `dumax`.  
Use `MPI_ALLREDUCE` so all process check same value.
- Part of final result must be printed by each process  
(into common file `heatsoln.txt`), in proper order.

See code in the repository or the notes:

`$CLASSTHNG/codes/mpi/jacobi2_mpi.f90`

R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

## Jacobi with MPI — splitting up arrays

```
real(kind = 8),dimension(:), allocatable :: f, u, uold
...
points_per_task = (n + ntasks - 1)/ntasks
call mpi_comm_rank(MPI_COMM_WORLD, me, ierr)
istart = me * points_per_task + 1
ien = min((me + 1)*points_per_task, n)

allocate(f(istart-1:ien+1), u(istart-1:ien+1), &
         uold(istart-1:ien+1))
```

Note that each process works on only a part of the array.

Distributed memory model, so no large shared array.

Includes “ghost cells” to store boundary values from neighboring processes.

R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

## Notes:

R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

## Jacobi with MPI — Sending to neighbors

```
call mpi_comm_rank(MPI_COMM_WORLD, me, ierr)
...
do iter = 1, maxiter
  uold = u
  if (me > 0) then
    ! Send left endpoint value to "left"
    call mpi_isend(uold(istart), 1, MPI_DOUBLE_PRECIS
                   me - 1, 1, MPI_COMM_WORLD, req1, ierr)
  end if
  if (me < ntasks-1) then
    ! Send right endpoint value to "right"
    call mpi_isend(uold(iend), 1, MPI_DOUBLE_PRECIS
                   me + 1, 2, MPI_COMM_WORLD, req2, ierr)
  end if
end do
```

**Note:** Non-blocking `mpi_isend` is used,

Different tags (1 and 2) for left-going, right-going messages.

R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

## Jacobi with MPI — Receiving from neighbors

**Note:** `uold(istart)` from `me+1` goes into `uold(iend+1)`:  
`uold(iend)` from `me-1` goes into `uold(istart-1)`:

```
do iter = 1, maxiter
  ! mpi_send's from previous slide
  if (me < ntasks-1) then
    ! Receive right endpoint value
    call mpi_recv(uold(iend+1), 1, MPI_DOUBLE_PRECIS
                  me + 1, 1, MPI_COMM_WORLD, mpistatus, ierr)
  end if
  if (me > 0) then
    ! Receive left endpoint value
    call mpi_recv(uold(istart-1), 1, MPI_DOUBLE_PRECIS
                  me - 1, 2, MPI_COMM_WORLD, mpistatus, ierr)
  end if
  ! Apply Jacobi iteration on my section of array
  do i = istart, iend
    u(i) = 0.5d0*(uold(i-1) + uold(i+1) + dx**2*f(i))
    dumax_task = max(dumax_task, abs(u(i) - uold(i)))
  end do
end do
```

R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

## Jacobi with MPI — Convergence test

```
do iter = 1, maxiter
  ! Send and receive boundary data (previous slides)
  dumax_task = 0.0d0
  ! Jacobi update:
  do i = istart, iend
    u(i) = 0.5d0*(uold(i-1) + uold(i+1) + dx**2*f(i))
    dumax_task = max(dumax_task, abs(u(i) - uold(i)))
  end do
  ! Take global maximum of dumax values
  call mpi_allreduce(dumax_task, dumax_global, 1, &
                     MPI_DOUBLE_PRECISION, &
                     MPI_MAX, MPI_COMM_WORLD, ierr)
  if (dumax_global < tol) exit
enddo
```

R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

## Notes:

## Notes:

## Notes:

R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

## Jacobi with MPI — Writing solution in order

Want to write table of values  $x(i), u(i)$  in `heat.soln.txt`.

Need them to be in proper order, so Process 0 must write to this file first, then Process 1, etc.

### Approach:

Each process  $me$  waits for a message from  $me-1$  indicating that it has finished writing its part. (Contents not important.)

Each process must open the file (without clobbering values already there), write to it, then close the file.

**Assumes all processes share a file system!**

On cluster or supercomputer, need to either:

- send all results to single process for writing, or
- write distributed files that may need to be combined later  
(some visualization tools handle distributed data!)

R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

## Heat equation in 2 dimensions

One-dimensional equation generalizes to

$$u_t(x, y, t) = D(u_{xx}(x, y, t) + u_{yy}(x, y, t)) + f(x, y, t)$$

on some domain in the  $x$ - $y$  plane, with initial and boundary conditions.

We will only consider rectangle  $0 \leq x \leq 1$ ,  $0 \leq y \leq 1$ .

### Steady state problem (with $D = 1$ ):

$$u_{xx}(x, y) + u_{yy}(x, y) = -f(x, y)$$

R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

## Finite difference equations in 2D

$$\frac{1}{h^2} (U_{i-1,j} + U_{i+1,j} + U_{i,j-1} + U_{i,j+1} - 4U_{i,j}) = -f(x_i, y_j).$$

On  $n \times n$  grid ( $\Delta x = \Delta y = 1/(n+1)$ ) this gives a linear system of  $n^2$  equations in  $n^2$  unknowns.

The above equation must be satisfied for  $i = 1, 2, \dots, n$  and  $j = 1, 2, \dots, n$ .

Matrix is  $n^2 \times n^2$ ,

e.g. on 100 by 100 grid, matrix is  $10,000 \times 10,000$ .

Contains  $(10,000)^2 = 100,000,000$  elements.

Matrix is **sparse**: each row has at most 5 nonzeros out of  $n^2$  elements! But structure is no longer tridiagonal.

R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

R.J. LeVeque, University of Washington



AMath 483/583, Lecture 21, May 13, 2011

## Notes:

## Notes:

## Notes:

## Finite difference equations in 2D



Matrix has block tridiagonal structure:

$$A = \frac{1}{h^2} \begin{bmatrix} T & I & & \\ I & T & I & \\ & I & T & I \\ & & I & T \end{bmatrix} \quad T = \begin{bmatrix} -4 & 1 & & \\ 1 & -4 & 1 & \\ & 1 & -4 & 1 \\ & & 1 & -4 \end{bmatrix}$$



R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

## Jacobi in 2D



Updating point 7 for example ( $u_{32}$ ):

$$U_{32}^{[k+1]} = \frac{1}{4}(U_{22}^{[k]} + U_{42}^{[k]} + U_{21}^{[k]} + U_{41}^{[k]} + h^2 f_{32})$$



R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

## Jacobi in 2D using MPI



With two processes: Could partition unknown into

Process 0 takes grid points 1–8

Process 1 takes grid points 9–16

Each time step:

Process 0 sends top boundary (5–8) to Process 1,  
Process 1 sends bottom boundary (9–12) to Process 0.

R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

Notes:



Notes:

Notes:

## Jacobi in 2D using MPI

With more grid points and processes...

Could partition several different ways, e.g. with 4 processes:



The partition on the right requires less communication.

With  $m^2$  processes on grid with  $n^2$  points,

$2m^2n$  boundary points on left,  $2mn$  boundary points on right.



R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

## Jacobi in 2D using MPI



For partition on left: Natural to number processes 0,1,2,3 and pass boundary data from Process  $k$  to  $k \pm 1$ .

For  $m \times m$  array of processors as on right: How do we figure out the neighboring process numbers?

R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

## Creating a communicator for Cartesian blocks

```
integer dims(2)
logical isperiodic(2), reorder

ndim = 2          ! 2d grid of processes
dims(1) = 4       ! for 4x6 grid of processes
dims(2) = 6
isperiodic(1) = .false.    ! periodic in x?
isperiodic(2) = .false.    ! periodic in y?
reorder = .true.         ! optimize ordering

call MPI_CART_CREATE(MPI_COMM_WORLD, ndim, &
                    dims, isperiodic, reorder, comm2d, ierr)
```

Can find neighboring processes within `comm2d` using  
`MPI_CART_SHIFT`

R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

## Notes:

## Notes:

## Notes:

R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

## Gauss-Seidel iteration in Fortran

```
do iter=1,maxiter
    dumax = 0.d0
    do i=1,n
        uold = u(i)
        u(i) = 0.5d0*(u(i-1) + u(i+1) + dx**2*f(i))
        dumax = max(dumax, abs(u(i)-uold))
    enddo
    ! check for convergence:
    if (dumax .lt. tol) exit
enddo
```

**Note:** Now  $u(i)$  depends on value of  $u(i-1)$  that has already been updated for previous  $i$ .

**Good news:** This converges about twice as fast as Jacobi!

**But... loop carried dependence!** Cannot parallelize so easily.

R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

## Red-black ordering

We are free to write equations of linear system in any order...  
reordering rows of coefficient matrix, right hand side.

Can also number unknowns of linear system in any order...  
reordering elements of solution vector.

**Red-black ordering:** Iterate through points with odd index first  
( $i = 1, 3, 5, \dots$ ) and then even index points ( $i = 2, 4, 6, \dots$ ).

Then all black points can be updated in any order,  
all red points can then be updated in any order.

Same asymptotic convergence rate as natural ordering.



R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

## Red-Black Gauss-Seidel

```
do iter=1,maxiter
    dumax = 0.d0
    ! UPDATE ODD INDEX POINTS:
    !$omp parallel do reduction(max : dumax) &
    !$omp private(uold)
    do i=1,n,2
        uold = u(i)
        u(i) = 0.5d0*(u(i-1) + u(i+1) + dx**2*f(i))
        dumax = max(dumax, abs(u(i)-uold))
    enddo
    ! UPDATE EVEN INDEX POINTS:
    !$omp parallel do reduction(max : dumax) &
    !$omp private(uold)
    do i=2,n,2
        uold = u(i)
        u(i) = 0.5d0*(u(i-1) + u(i+1) + dx**2*f(i))
        dumax = max(dumax, abs(u(i)-uold))
    enddo
    ! check for convergence:
    if (dumax .lt. tol) exit
enddo
```

R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

## Notes:

## Notes:

## Gauss-Seidel method in 2D

If  $\Delta x = \Delta y = h$ :

$$\frac{1}{h^2} (U_{i-1,j} + U_{i+1,j} + U_{i,j-1} + U_{i,j+1} - 4U_{i,j}) = -f(x_i, y_j).$$

Solve for  $U_{i,j}$  and iterate:

$$u_{i,j}^{[k+1]} = \frac{1}{4}(u_{i-1,j}^{[k+1]} + u_{i+1,j}^{[k]} + u_{i,j-1}^{[k+1]} + u_{i,j+1}^{[k]} - h^2 f_{i,j})$$

Again no need for matrix  $A$ .

**Note:** Above indices for old and new values assumes we iterate in the **natural row-wise order**.



R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

## Gauss-Seidel in 2D



Updating point 7 for example ( $u_{32}$ ):

Depends on **new values** at points 6 and 3, **old values** at points 7 and 10.

$$U_{32}^{[k+1]} = \frac{1}{4}(U_{22}^{[k+1]} + U_{42}^{[k]} + U_{21}^{[k+1]} + U_{41}^{[k]} + h^2 f_{32})$$



R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

## Red-black ordering in 2D



Again all black points can be updated in any order:

New value depends only on red neighbors.

Then all red points can be updated in any order:

New value depends only on black neighbors.

R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

R.J. LeVeque, University of Washington

AMath 483/583, Lecture 21, May 13, 2011

## Notes:

## Notes:

## SOR method

Gauss-Seidel move solution in right direction but not far enough in general.

Iterates “relax” towards solution.

### Successive Over-Relaxation (SOR):


Compute Gauss-Seidel approximation and then go further:

$$U_i^{GS} = \frac{1}{2}(U_{i-1}^{[k+1]} + U_{i+1}^{[k]} + \Delta x^2 f(x_i))$$
$$U_i^{[k+1]} = U_i^{[k]} + \omega(U_i^{GS} - U_i^{[k]})$$

where  $1 < \omega < 2$ .

Optimal omega (For this problem):  $\omega = 2 - 2\pi\Delta x$ .

## Convergence rates

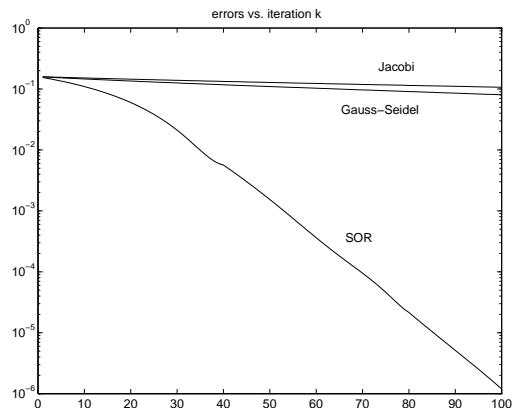

## Red-Black SOR in 1D

```
do iter=1,maxiter
dumax = 0.d0
! UPDATE ODD INDEX POINTS:
!$omp parallel do reduction(max : dumax) &
!$omp private(uold, ugs)
do i=1,n,2
    uold = u(i)
    ugs = 0.5d0*(u(i-1) + u(i+1) + dx**2*f(i))
    u(i) = uold + omega*(ugs-uold)
    dumax = max(dumax, abs(u(i)-uold))
enddo
! UPDATE EVEN INDEX POINTS:
!$omp parallel do reduction(max : dumax) &
!$omp private(uold, ugs)
do i=2,n,2
    uold = u(i)
    ugs = 0.5d0*(u(i-1) + u(i+1) + dx**2*f(i))
    u(i) = uold + omega*(ugs-uold)
    dumax = max(dumax, abs(u(i)-uold))
enddo
! check for convergence...
```

Note that `uold`, `ugs` must be private!

## Notes:

## Notes:

## Notes: