TCSS 422: OPERATING SYSTEMS



Memory Virtualization IV:
Translation Lookaside Buffer (TLB),
Smaller Tables,
Multi-Level Page Tables,
Beyond Physical Memory

Wes J. Lloyd
School of Engineering and Technology
University of Washington - Tacoma

1

OBJECTIVES – 5/23

- **Questions from 5/21**
- Memory Segmentation Activity + answers (available in Canvas)
- Assignment 2 – May 31
- Assignment 3 - (Tutorial) Introduction to Linux Kernel Modules
- Final exam – Thursday June 6 @ 3:40pm
- Quiz 4 – Page Tables - Due June 6 @ 11:59 am
- Chapter 19: Translation Lookaside Buffer (TLB)
  - TLB Algorithm, Hit-to-Miss Ratios
- Chapter 20: Paging: Smaller Tables
  - Smaller Tables, Multi-level Page Tables, N-level Page Tables
- Chapter 21/22: Beyond Physical Memory
  - Swapping Mechanisms, Swapping Policies

2

ONLINE DAILY FEEDBACK SURVEY

- Daily Feedback Quiz in Canvas – Available After Each Class
- Extra credit available for completing surveys ***ON TIME***
- Tuesday surveys: due by ~ Wed @ 11:59p
- Thursday surveys: due ~ Mon @ 11:59p

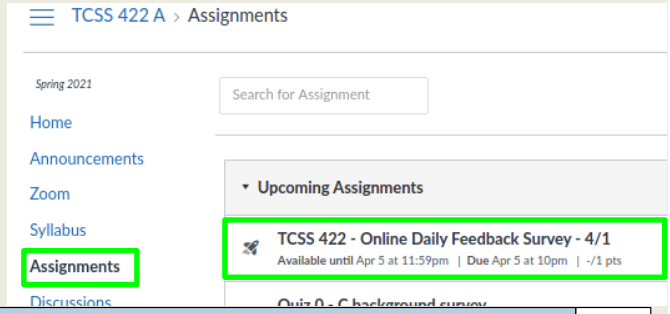

3

TCSS 422 - Online Daily Feedback Survey - 4/1

Quiz Instructions

Question 1 0.5 pts

On a scale of 1 to 10, please classify your perspective on material covered in today's class:

1	2	3	4	5	6	7	8	9	10
Mostly Review To Me				Equal New and Review					Mostly New to Me

Question 2 0.5 pts

Please rate the pace of today's class:

1	2	3	4	5	6	7	8	9	10
Slow				Just Right					Fast

4

MATERIAL / PACE

- Please classify your perspective on material covered in today's class (21 respondents):
- 1-mostly review, 5-equal new/review, 10-mostly new
- **Average – 5.90 (↓ - previous 6.00)**

- Please rate the pace of today's class:
- 1-slow, 5-just right, 10-fast
- **Average – 5.14 (↓ - previous 5.19)**

5

FEEDBACK FROM 5/21

- ***For Quiz 3, do we only have to worry for the array size 50000 or for all array sizes?***

- In syncarray.c there is a compiler directive which sets the array size to 50000

```
// ---------------------------------
// Synchronized Array Data Structure
// ---------------------------------

#define ARRAY_SIZE 50000
```

- The array size can be changed by modifying this
- For quiz 3, we can assume that this constant will be changed as needed when the syncarray is used

6

FEEDBACK - 2

- ***Some tips for problems with exponential math and bits:***
- >>> It can be helpful to review charts and patterns:
- 8 bits = 1 byte
- 16 bits = 2 bytes
- 32 bits = 4 bytes
- 64 bits = 8 bytes
- 1,024 bytes = 1 kilobyte (2^10)
- 1,024 kilobytes = 1 megabyte (2^20)
- 1,024 megabytes = 1 gigabyte (2^30)
- 1,024 gigabytes = 1 terabyte (2^40)
- 1,024 terrabytes = 1 petabyte (2^50)

7

FEEDBACK - 3

- ***For simplicity rounding is often acceptable:***
- 1 kilobyte (2^10) = 1,024 bytes → ***1,000 bytes***
- 1,024 kilobytes (2^20) = 1 megabyte → ***1,000,000 bytes***
- 1,024 megabytes = 1 gigabyte (2^30)→1,000,000,000 bytes
- 1,024 gigabytes = 1 terabyte (2^40)→1,000,000,000,000 bytes
- 1,024 terrabytes = 1 petabyte (2^50)→1,000,000,000,000,000 bytes

8

2^1	2	2^{17}	131,072	2^{33}	8,589,934,592	2^{49}	562,949,953,421,312
2^2	4	2^{18}	262,144	2^{34}	17,179,869,184	2^{50}	1,125,899,906,842,624
2^3	8	2^{19}	524,288	2^{35}	34,359,738,368	2^{51}	2,251,799,813,685,248
2^4	16	2^{20} megabyte	1,048,576	2^{36}	68,719,476,736	2^{52}	4,503,599,627,370,496
2^5	32	2^{21}	2,097,152	2^{37}	137,438,953,472	2^{53}	9,007,199,254,740,992
2^6	64	2^{22}	4,194,304	238	274,877,906,944	2^{54}	18,014,398,509,481,984
2^7	128	2^{23}	8,388,608	2^{39}	549,755,813,888	2^{55}	36,028,797,018,963,968
2^8	256	2^{24}	16,777,216	2^{40} terabyte	1,099,511,627,776	2^{56}	72,057,594,037,927,936
2^9	512	2^{25}	33,554,432	2^{41}	2,199,023,255,552	2^{57}	144,115,188,075,855,872
2^{10} kilobyte	1,024	2^{26}	67,108,864	2^{42}	4,398,046,511,104	2^{58}	288,230,376,151,711,744
2^{11}	2,048	2^{27}	134,217,728	2^{43}	8,796,093,022,208	2^{59}	576,460,752,303,423,488
2^{12}	4,096	2^{28}	268,435,456	2^{44}	17,592,186,044,416	2^{60}	1,152,921,504,606,846,976
2^{13}	8,192	2^{29}	536,870,912	2^{45}	35,184,372,088,832	2^{61}	2,305,843,009,213,693,952
2^{14}	16,384	2^{30} gigabyte	1,073,741,824	2^{46}	70,368,744,177,664	2^{62}	4,611,686,018,427,387,904
2^{15}	32,768	2^{31}	2,147,483,648	2^{47}	140,737,488,355,328	2^{63}	9,223,372,036,854,775,808
2^{16}	65,536	2^{32}	4,294,967,296	2^{48}	281,474,976,710,656	2^{64} bubbabyte	18,446,744,073,709,551,616

9

FEEDBACK - 4

- ***How many bits are required to index the following amounts of memory?***

1. 1,024 bytes = 1 kilobyte
   - (2^10) → 10 bits
2. 1,024 kilobytes = 1 megabyte
   - (2^20) → 20 bits
3. 1,024 megabytes = 1 gigabyte
   - (2^30) → 30 bits
4. 1,024 gigabytes = 1 terabyte
   - (2^40) → 40 bits
5. 1,024 terrabytes = 1 petabyte
   - (2^50) → 50 bits

10

FEEDBACK - 5

- ***With paging, we divide an address space in fixed sized pieces (known as the page size)***
- ***Assuming a computer indexes memory using 1 kilobyte memory pages (2^10)***
- ***How many unique pages are required to manage/index memory?***
- 1 kilobyte (2^10) of memory
  - 1 page
- 1 megabyte (2^20) of memory
  - 1024 pages (2^10)
- 1 gigabyte (2^30) of memory
  - 1,048,576 pages (2^20)
- 1 terabyte (2^40) of memory
  - 1,073,741,824 pages (2^30)
- 1 petabyte (2^50) of memory
  - 1,099,511,627,776 pages (2^40)

11

OBJECTIVES – 5/23

- Questions from 5/21
- **Memory Segmentation Activity + answers (available in Canvas)**
- Assignment 2 – May 31
- Assignment 3: (Tutorial) Intro to Linux Kernel Modules - June 9
- Final exam – Thursday June 6 @ 3:40pm
- Quiz 4 – Page Tables - Due June 6 @ 11:59 am
- Chapter 19: Translation Lookaside Buffer (TLB)
  - TLB Algorithm, Hit-to-Miss Ratios
- Chapter 20: Paging: Smaller Tables
  - Smaller Tables, Multi-level Page Tables, N-level Page Tables
- Chapter 21/22: Beyond Physical Memory
  - Swapping Mechanisms, Swapping Policies

12

OBJECTIVES – 5/23

- Questions from 5/21
- Memory Segmentation Activity + answers (available in Canvas)
- **Assignment 2 – May 31**
- Assignment 3: (Tutorial) Intro to Linux Kernel Modules - June 9
- Final exam – Thursday June 6 @ 3:40pm
- Quiz 4 – Page Tables - Due June 6 @ 11:59 am
- Chapter 19: Translation Lookaside Buffer (TLB)
  - TLB Algorithm, Hit-to-Miss Ratios
- Chapter 20: Paging: Smaller Tables
  - Smaller Tables, Multi-level Page Tables, N-level Page Tables
- Chapter 21/22: Beyond Physical Memory
  - Swapping Mechanisms, Swapping Policies

13

OBJECTIVES – 5/23

- Questions from 5/21
- Memory Segmentation Activity + answers (available in Canvas)
- Assignment 2 – May 31
- **Assignment 3: (Tutorial) Intro to Linux Kernel Modules - June 9**
- Final exam – Thursday June 6 @ 3:40pm
- Quiz 4 – Page Tables - Due June 6 @ 11:59 am
- Chapter 19: Translation Lookaside Buffer (TLB)
  - TLB Algorithm, Hit-to-Miss Ratios
- Chapter 20: Paging: Smaller Tables
  - Smaller Tables, Multi-level Page Tables, N-level Page Tables
- Chapter 21/22: Beyond Physical Memory
  - Swapping Mechanisms, Swapping Policies

14

ASSIGNMENT 3: INTRODUCTION TO LINUX KERNEL MODULES

- Assignment 3 provides an introduction to kernel programming by demonstrating how to create a Linux Kernel Module
- Kernel modules are commonly used to write device drivers and can access protected operating system data structures
  - For example: Linux `task_struct` process data structure

15

OBJECTIVES – 5/23

- Questions from 5/21
- Memory Segmentation Activity + answers (available in Canvas)
- Assignment 2 – May 31
- Assignment 3: (Tutorial) Intro to Linux Kernel Modules - June 9
- **Final exam – Thursday June 6 @ 3:40pm**
- Quiz 4 – Page Tables - Due June 6 @ 11:59 am
- Chapter 20: Paging: Smaller Tables
  - Smaller Tables, Multi-level Page Tables, N-level Page Tables
- Chapter 21/22: Beyond Physical Memory
  - Swapping Mechanisms, Swapping Policies

16

FINAL EXAM – THURSDAY JUNE 6 @ 3:40PMTH

- Thursday June 6 from 3:40 to 5:40 pm
  - Final (100 points)
  - SHORT: similar number of questions as the midterm
  - 2-hours
  - Focus on new content - since the midterm (~70% new, 30% before)
- Final Exam Review -
  - Complete Memory Segmentation Activity
  - Complete Quiz 4
  - Practice Final Exam Questions – 2nd hour of May 30th class session
  - Individual work
  - 2 pages of notes (any sized paper), double sided
  - Basic calculators allowed
  - NO smartphones, laptop, book, Internet, group work

17

OBJECTIVES – 5/23

- Questions from 5/21
- Memory Segmentation Activity + answers (available in Canvas)
- Assignment 2 – May 31
- Assignment 3: (Tutorial) Intro to Linux Kernel Modules - June 9
- Final exam – Thursday June 6 @ 3:40pm
- **Quiz 4 – Page Tables - Due June 6 @ 11:59 am**
- Chapter 19: Translation Lookaside Buffer (TLB)
  - TLB Algorithm, Hit-to-Miss Ratios
- Chapter 20: Paging: Smaller Tables
  - Smaller Tables, Multi-level Page Tables, N-level Page Tables
- Chapter 21/22: Beyond Physical Memory
  - Swapping Mechanisms, Swapping Policies

18

OBJECTIVES – 5/23

- Questions from 5/21
- Memory Segmentation Activity + answers (available in Canvas)
- Assignment 2 – May 31
- Assignment 3: (Tutorial) Intro to Linux Kernel Modules - June 9
- Final exam – Thursday June 6 @ 3:40pm
- Quiz 4 – Page Tables - Due June 6 @ 11:59 am
- **Chapter 19: Translation Lookaside Buffer (TLB)**
  - TLB Algorithm, Hit-to-Miss Ratios
- Chapter 20: Paging: Smaller Tables
  - Smaller Tables, Multi-level Page Tables, N-level Page Tables
- Chapter 21/22: Beyond Physical Memory
  - Swapping Mechanisms, Swapping Policies

19

CHAPTER 19: TRANSLATION LOOKASIDE BUFFER (TLB)

20

TRANSLATION LOOKASIDE BUFFER

- Legacy name…
- Better name, "Address Translation Cache"
- TLB is an on CPU cache of address translations
  - virtual → physical memory

21

COUNTING MEMORY ACCESSES

- Example: Use this Array initialization Code

```
int array[1000];
...
for (i = 0; i < 1000; i++)
        array[i] = 0;
```

- Assembly equivalent:

```
0x1024 movl $0x0,(%edi,%eax,4)
0x1028 incl %eax
0x102c cmpl $0x03e8,%eax
0x1030 jne 0x1024
```


22

VISUALIZING MEMORY ACCESSES: FOR THE FIRST 5 LOOP ITERATIONS

- Locations:
  - Page table
  - Array
  - Code
- 50 accesses for 5 loop iterations

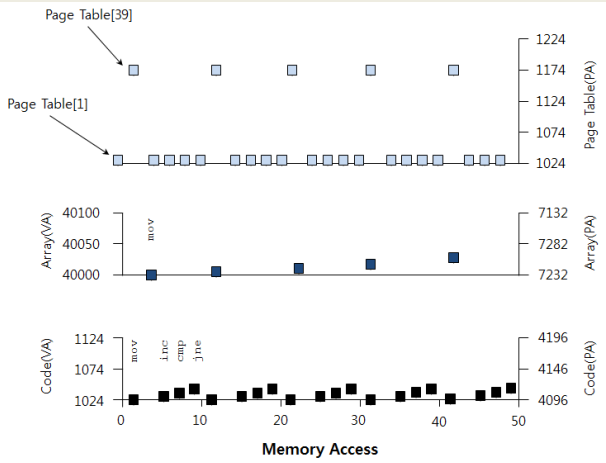

23

TRANSLATION LOOKASIDE BUFFER - 2

- Goal: Reduce access to the page tables
- Example: 50 RAM accesses for first 5 for-loop iterations
- Move lookups from RAM to TLB by caching page table entries

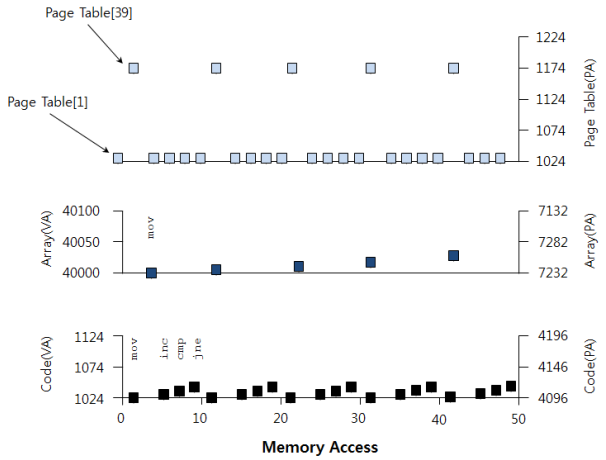

24

TRANSLATION LOOKASIDE BUFFER (TLB)

- Part of the CPU's Memory Management Unit (MMU)
- Address translation cache

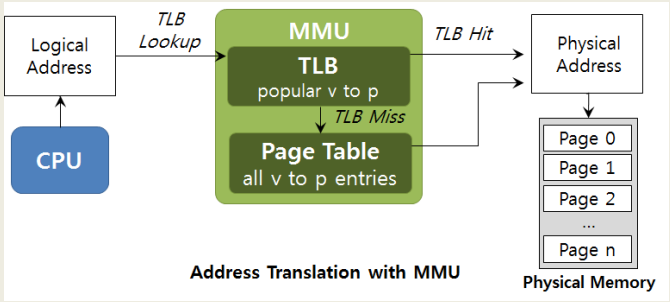

25

TRANSLATION LOOKASIDE BUFFER (TLB)

- Part of the CPU's Memory Management Unit (MMU)
- Address translation cache

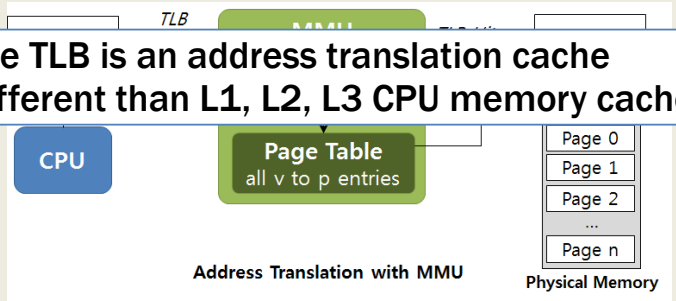

26

OBJECTIVES – 5/23

- Questions from 5/21
- Memory Segmentation Activity + answers (available in Canvas)
- Assignment 2 – May 31
- Assignment 3: (Tutorial) Intro to Linux Kernel Modules - June 9
- Final exam – Thursday June 6 @ 3:40pm
- Quiz 4 – Page Tables - Due June 6 @ 11:59 am
- Chapter 19: Translation Lookaside Buffer (TLB)
  - **TLB Algorithm** Hit-to-Miss Ratios
- Chapter 20: Paging: Smaller Tables
  - Smaller Tables, Multi-level Page Tables, N-level Page Tables
- Chapter 21/22: Beyond Physical Memory
  - Swapping Mechanisms, Swapping Policies

27

TLB BASIC ALGORITHM

- For: array based page table
- Hardware managed TLB

```
1: VPN = (VirtualAddress & VPN_MASK ) >> SHIFT
2: (Success , TlbEntry) = TLB_Lookup(VPN)
3:    if(Success == True){ // TLB Hit
4:    if(CanAccess(TlbEntry.ProtectBits) == True ){
5:        Offset = VirtualAddress & OFFSET_MASK
6:        PhysAddr (TlbEntry.PFN << SHIFT) | Offset
7:        AccessMemory( PhysAddr )
8:    }else RaiseException(PROTECTION_ERROR)
```

Generate the physical address to access memory

28

TLB BASIC ALGORITHM - 2

```
11:     else{ //TLB Miss
12:         PTEAddr = PTBR + (VPN * sizeof(PTE))
13:         PTE = AccessMemory(PTEAddr)
14:         (…)   // Check for, and raise exceptions…
15:
16:         TLB_Insert( VPN , PTE.PFN , PTE.ProtectBits)
17:         RetryInstruction()
18:     }
19:}
```

Retry the instruction… (requery the TLB)

TLB – ADDRESS TRANSLATION CACHE

- Key detail:
- For a TLB miss, we first access the page table in RAM to populate the TLB… **we then requery the TLB**
- **All address translations go through the TLB**

OBJECTIVES – 5/23

- Questions from 5/21
- Memory Segmentation Activity + answers (available in Canvas)
- Assignment 2 – May 31
- Assignment 3: (Tutorial) Intro to Linux Kernel Modules - June 9
- Final exam – Thursday June 6 @ 3:40pm
- Quiz 4 – Page Tables - Due June 6 @ 11:59 am
- Chapter 19: Translation Lookaside Buffer (TLB)
  - TLB Algorithm, **Hit-to-Miss Ratios**
- Chapter 20: Paging: Smaller Tables
  - Smaller Tables, Multi-level Page Tables, N-level Page Tables
- Chapter 21/22: Beyond Physical Memory
  - Swapping Mechanisms, Swapping Policies

31

TLB EXAMPLE

```
0:      int sum = 0 ;
1:      for( i=0; i<10; i++){
2:              sum+=a[i];
3:      }
```

- Example:
- Program address space: 256-byte
  - Addressable using 8 total bits (2^8)
  - 4 bits for the VPN (16 total pages)
- Page size: 16 bytes
  - Offset is addressable using 4-bits
- Store an array: of (10) 4-byte integers

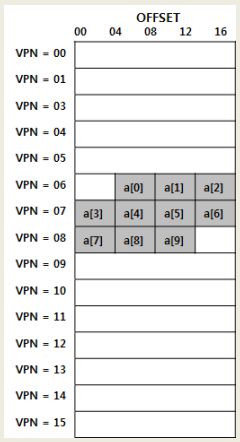

32

TLB EXAMPLE - 2

```
0:      int sum = 0 ;
1:      for( i=0; i<10; i++){
2:              sum+=a[i];
3:      }
```

- Consider the code above:
- Initially the TLB does not know where a[] is
- Consider the accesses:
- a[0], a[1], a[2], a[3], a[4], a[5], a[6], a[7], a[8], a[9]
- **How many pages are accessed?**
- **What happens when accessing a page not in the TLB?**

	OFFSET 00	04	08	12	16
VPN = 00					
VPN = 01					
VPN = 03					
VPN = 04					
VPN = 05					
VPN = 06		a[0]	a[1]	a[2]	
VPN = 07	a[3]	a[4]	a[5]	a[6]	
VPN = 08	a[7]	a[8]	a[9]		
VPN = 09					
VPN = 10					
VPN = 11					
VPN = 12					
VPN = 13					
VPN = 14					
VPN = 15					

33

TLB EXAMPLE - 3

```
0:      int sum = 0 ;
1:      for( i=0; i<10; i++){
2:              sum+=a[i];
3:      }
```

- For the accesses: a[0], a[1], a[2], a[3], a[4],
- a[5], a[6], a[7], a[8], a[9]
- How many are hits?
- How many are misses?
- What is the hit rate? (%)
  - 70% (3 misses one for each VP, 7 hits)

	OFFSET 00	04	08	12	16
VPN = 00					
VPN = 01					
VPN = 03					
VPN = 04					
VPN = 05					
VPN = 06		a[0]	a[1]	a[2]	
VPN = 07	a[3]	a[4]	a[5]	a[6]	
VPN = 08	a[7]	a[8]	a[9]		
VPN = 09					
VPN = 10					
VPN = 11					
VPN = 12					
VPN = 13					
VPN = 14					
VPN = 15					

34

TLB EXAMPLE - 4

```
0:      int sum = 0 ;
1:      for( i=0; i<10; i++){
2:              sum+=a[i];
3:      }
```

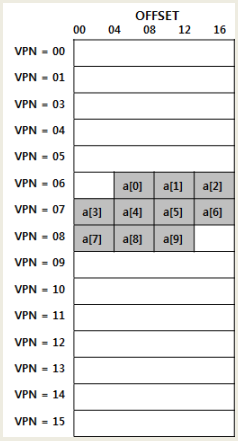

- What factors affect the hit/miss rate?
  - Page size
  - Data/Access locality (how is data accessed?)
    - Sequential array access vs. random array access
  - Temporal locality
  - Size of the TLB cache (how much history can you store?)

35

OBJECTIVES – 5/23

- Questions from 5/21
- Memory Segmentation Activity + answers (available in Canvas)
- Assignment 2 – May 31
- Assignment 3: (Tutorial) Intro to Linux Kernel Modules - June 9
- Final exam – Thursday June 6 @ 3:40pm
- Quiz 4 – Page Tables - Due June 6 @ 11:59 am
- Chapter 19: Translation Lookaside Buffer (TLB)
  - TLB Algorithm, Hit-to-Miss Ratios
- **Chapter 20: Paging: Smaller Tables**
  - Smaller Tables, Multi-level Page Tables, N-level Page Tables
- Chapter 21/22: Beyond Physical Memory
  - Swapping Mechanisms, Swapping Policies

36

CHAPTER 20: PAGING: SMALLER TABLES

37

LINEAR PAGE TABLES

- Consider array-based page tables:
  - Each process has its own page table
  - 32-bit process address space (up to 4GB)
  - With 4 KB pages
  - 20 bits for VPN
  - 12 bits for the page offset

38

LINEAR PAGE TABLES - 2

- Page tables stored in RAM
- Support potential storage of 2^{20} translations
  = 1,048,576 pages per process @ 4 bytes/page
- Page table size 4MB / process

$$\text{Page table size} = \frac{2^{32}}{2^{12}} * 4Byte = 4MByte$$

- Consider 100+ OS processes
  - Requires 400+ MB of RAM to store process information

39

LINEAR PAGE TABLES - 2

- Page tables stored in RAM
- Support potential storage of 2^{20} translations
  = 1,048,576 pages per process @ 4 bytes/page
- Page table size 4MB / process

Page tables are too big and consume too much memory.

Need Solutions …

- Consider 100+ OS processes
  - Requires 400+ MB of RAM to store process information

40

OBJECTIVES – 5/23

- Questions from 5/21
- Memory Segmentation Activity + answers (available in Canvas)
- Assignment 2 – May 31
- Assignment 3: (Tutorial) Intro to Linux Kernel Modules - June 9
- Final exam – Thursday June 6 @ 3:40pm
- Quiz 4 – Page Tables - Due June 6 @ 11:59 am
- Chapter 19: Translation Lookaside Buffer (TLB)
  - TLB Algorithm, Hit-to-Miss Ratios
- Chapter 20: Paging: Smaller Tables
  - **Smaller Tables** Multi-level Page Tables, N-level Page Tables
- Chapter 21/22: Beyond Physical Memory
  - Swapping Mechanisms, Swapping Policies

41

PAGING: USE LARGER PAGES

- **Larger pages** = 16KB = 2^{14}
- 32-bit address space: 2^{32}
- 2^{18} = 262,144 pages

$$\frac{2^{32}}{2^{14}} * 4 = 1MB \quad \text{per page table}$$

- Memory requirement cut to ¼
- However pages are huge
- Internal fragmentation results
- 16KB page(s) allocated for small programs with only a few variables

42

PAGE TABLES: WASTED SPACE

- Process: 16KB Address Space w/ 1KB pages

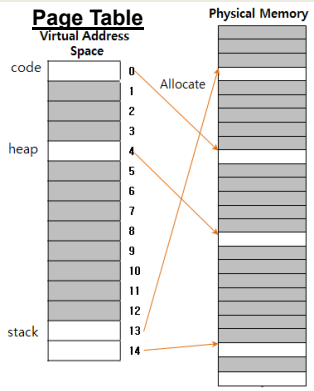

A 16KB Address Space with 1KB Pages

PFN	valid	prot	present	dirty
10	1	r-x	1	0
-	0	-	-	-
-	0	-	-	-
-	0	-	-	-
15	1	rw-	1	1
...	...	...	...	...
-	0	-	-	-
3	1	rw-	1	1
23	1	rw-	1	1

A Page Table For 16KB Address Space

43

PAGE TABLES: WASTED SPACE

- Process: 16KB Address Space w/ 1KB pages

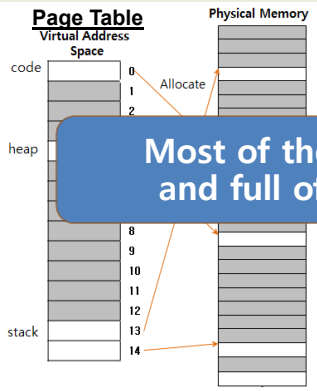

A 16KB Address Space with 1KB Pages

Most of the page table is unused and full of wasted space. (73%)

PFN	valid	prot	present	dirty
				0
				-
				-
				-
15	1	rw-	1	1
...	...	...	...	...
-	0	-	-	-
3	1	rw-	1	1
23	1	rw-	1	1

A Page Table For 16KB Address Space

44

OBJECTIVES – 5/23

- Questions from 5/21
- Memory Segmentation Activity + answers (available in Canvas)
- Assignment 2 – May 31
- Assignment 3: (Tutorial) Intro to Linux Kernel Modules - June 9
- Final exam – Thursday June 6 @ 3:40pm
- Quiz 4 – Page Tables - Due June 6 @ 11:59 am
- Chapter 19: Translation Lookaside Buffer (TLB)
  - TLB Algorithm, Hit-to-Miss Ratios
- Chapter 20: Paging: Smaller Tables
  - Smaller Tables, **Multi-level Page Tables**, N-level Page Tables
- Chapter 21/22: Beyond Physical Memory
  - Swapping Mechanisms, Swapping Policies

45

MULTI-LEVEL PAGE TABLES

- Consider a page table:
- 32-bit addressing, 4KB pages
- 2^{20} page table entries
- Even if memory is sparsely populated the *per process* page table requires:

$$\text{Page table size} = \frac{2^{32}}{2^{12}} * 4Byte = 4MByte$$

- Often most of the 4MB *per process* page table is empty
- Page table must be placed in 4MB contiguous block of RAM

- MUST SAVE MEMORY!

46

MULTI-LEVEL PAGE TABLES - 2

- Add level of indirection, the "page directory"

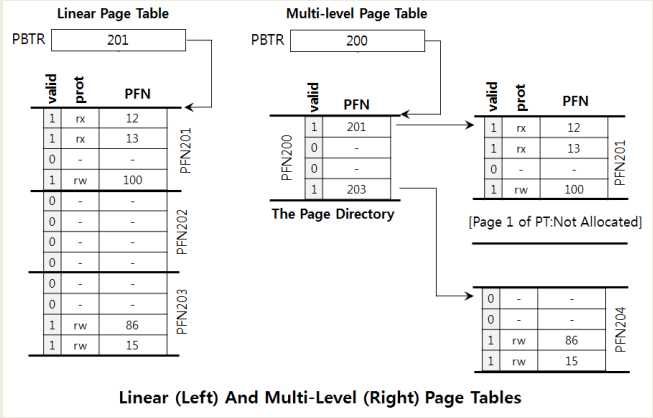

Linear (Left) And Multi-Level (Right) Page Tables

47

MULTI-LEVEL PAGE TABLES - 2

- Add level of indirection, the "page directory"

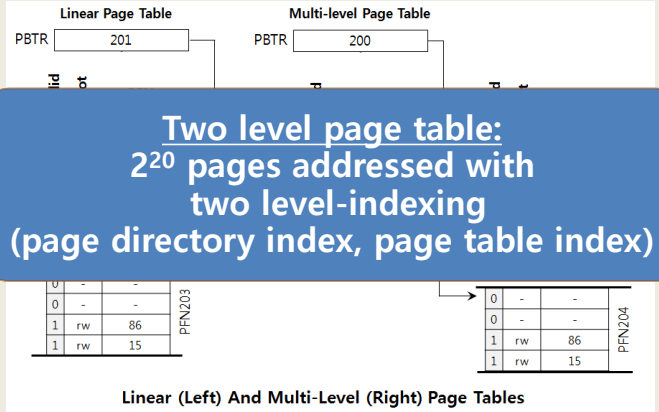

Linear (Left) And Multi-Level (Right) Page Tables

48

4 GB computer (2^32) and 4KB pages (2^12)
1. How much space is required for a 2-level page table with one page directory (PD) and one page table (PT)?
2. How much memory can a single PD pointing to a single PT address?



49

4 GB computer (2^32) and 4KB pages (2^12)
1. How much space is required for a 2-level page table with one page directory (PD) and one page table (PT)?
2. How much memory can a single PD pointing to a single PT address?

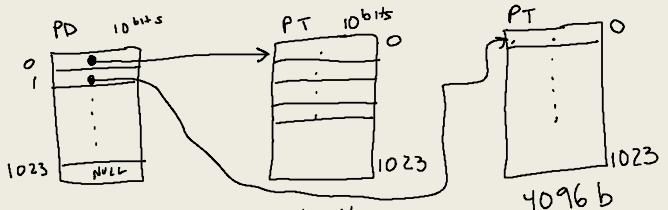

1024 x 4
4096 +
8192 bytes

1024 x 4
4096

1024 x 4096

1024 x 4 MB

2^{10} 2^{12}

2. 2^{22} → 4MB → 8MB WITH A SECOND PT

50

51

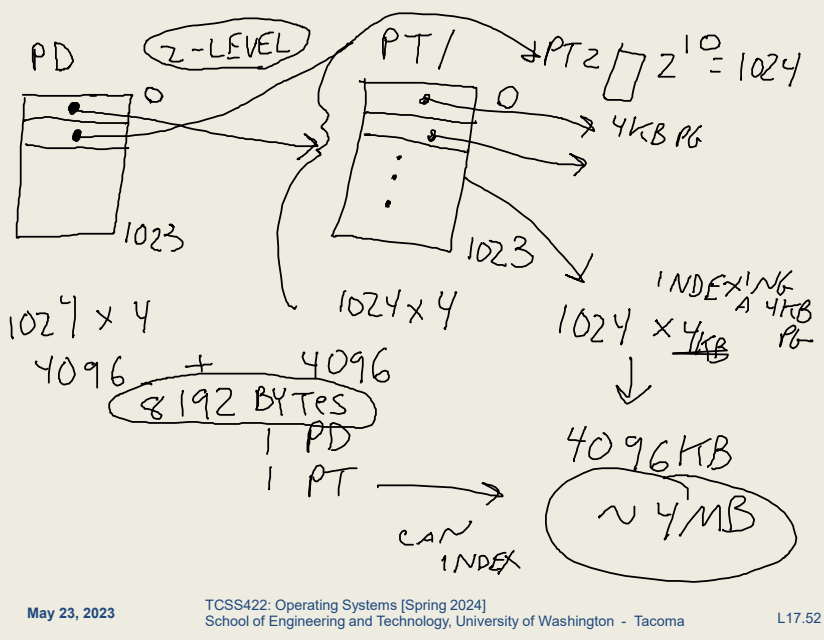
PD
2-LEVEL
PT1
PT2
$2^{10} = 1024$
0
0
4KB PG
1023
1023
1024 x 4
1024 x 4
1024 x 4KB
INDEXING A 4KB PG
4096 + 4096
8192 BYTES
1 PD
1 PT
CAN INDEX
4096KB
~ 4MB

52

MULTI-LEVEL PAGE TABLES - 3

- Advantages
  - Only allocates page table space in proportion to the address space actually used
  - Can easily grab next free page to expand page table
- Disadvantages
  - Multi-level page tables are an example of a time-space tradeoff
  - Sacrifice address translation time (now 2-level) for space
  - Complexity: multi-level schemes are more complex

53

EXAMPLE

- 16KB address space, 64byte pages
- How large would a one-level page table need to be?
- 2^{14} (address space) / 2^{6} (page size) = 2^{8} = 256 (pages)



Flag	Detail
Address space	16 KB
Page size	64 byte
Virtual address	14 bit
VPN	8 bit
Offset	6 bit
Page table entry	2^{8}(256)

A 16-KB Address Space With 64-byte Pages



54

EXAMPLE - 2

- 256 total page table entries (64 bytes each)
- 1,024 bytes page table size, stored using 64-byte pages = (1024/64) = 16 page directory entries (PDEs)
- Each page directory entry (PDE) can hold 16 page table entries (PTEs) *e.g. lookups*
- 16 page directory entries (PDE) x 16 page table entries (PTE) = 256 total PTEs
- **Key idea: the page table is stored using pages too!**

55

PAGE DIRECTORY INDEX

- Now, let's split the page table into two:
  - 8 bit VPN to map 256 pages
  - 4 bits for page directory index (PDI – 1st level page table)
  - 6 bits offset into 64-byte page



56

PAGE TABLE INDEX

- 4 bits page directory index (PDI – 1st level)
- 4 bits page table index (PTI – 2nd level)

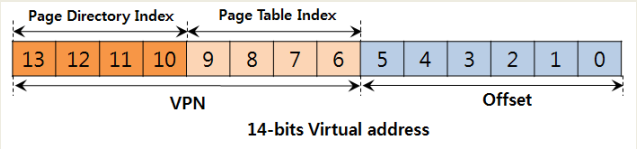

- To dereference one 64-byte memory page,
  - We need one page directory entry (PDE)
  - One page table Index (PTI) – can address 16 pages

EXAMPLE - 3

- For this example, how much space is required to store as a *single-level* page table with any number of PTEs?

- 16KB address space, 64 byte pages
- 256 page frames, 4 byte page size
- 1,024 bytes required (*single level*)

- How much space is required for a *two-level* page table with only 4 page table entries (PTEs) ?
- Page directory = 16 entries x 4 bytes (1 x 64 byte page)
- Page table = 16 entries (4 used) x 4 bytes (1 x 64 byte page)
- 128 bytes required (2 x 64 byte pages)
  - Savings = using just 12.5% the space !!!

For this example, how much space is required to store as a *single-level* page table with any number of PTEs?
16KB address space, 64 byte pages, 256 page frames, 4 byte page size

Storage requirement: bytes required (*single level*)

59

For this example, how much space is required to store as a *single-level* page table with any number of PTEs?
16KB address space, 64 byte pages, 256 page frames, 4 byte page size

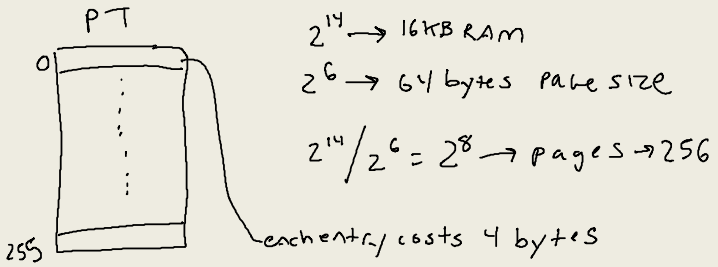

256 entries × 4 bytes = 1,024 bytes
1 KB

Storage requirement: bytes required (*single level*)

60

How much space is required for a *two-level* page table with only 4 page table entries (PTEs) ? (one page each for code segment, stack segment, heap segment, data segment)
16KB address space, 64 byte pages, 256 page frames, 4 byte page size

Page directory = 16 entries x 4 bytes (1 x 64 byte page)
Page table = 16 entries (4 used) x 4 bytes (1 x 64 byte page)
Store requirement = 128 bytes required (2 x 64 byte pages)
Savings =

61

How much space is required for a *two-level* page table with only 4 page table entries (PTEs) ? (one page each for code segment, stack segment, heap segment, data segment)
16KB address space, 64 byte pages, 256 page frames, 4 byte page size

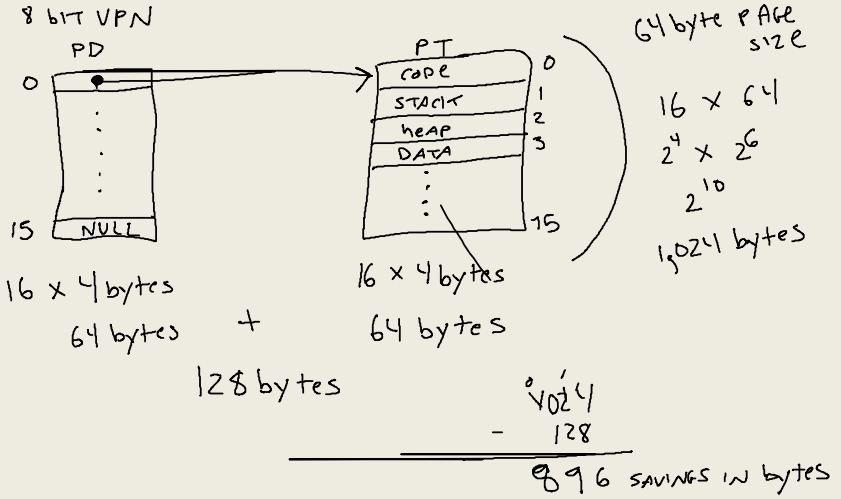

Page directory = 16 entries x 4 bytes (1 x 64 byte page)
Page table = 16 entries (4 used) x 4 bytes (1 x 64 byte page)
Store requirement = 128 bytes required (2 x 64 byte pages)
Savings =

62

32-BIT EXAMPLE

- Consider: 32-bit address space, 4KB pages, 2^{20} pages
- Only 4 mapped pages
- **Single level**: 4 MB (we've done this before) 12.5%
- **Two level**: (old VPN was 20 bits, split in half)
- Page directory = 2^{10} entries x 4 bytes = 1 x 4 KB page
- Page table = 4 entries x 4 bytes (mapped to 1 4KB page)
- 8KB (8,192 bytes) required
- Savings = using just .78 % the space !!!
- 100 sparse processes now require < 1MB for page tables
  - 8KB x 100 = 800KB

63

OBJECTIVES – 5/23

- Questions from 5/21
- Memory Segmentation Activity + answers (available in Canvas)
- Assignment 2 – May 31
- Assignment 3: (Tutorial) Intro to Linux Kernel Modules - June 9
- Final exam – Thursday June 6 @ 3:40pm
- Quiz 4 – Page Tables - Due June 6 @ 11:59 am
- Chapter 19: Translation Lookaside Buffer (TLB)
  - TLB Algorithm, Hit-to-Miss Ratios
- Chapter 20: Paging: Smaller Tables
  - Smaller Tables, Multi-level Page Tables, **N-level Page Tables**
- Chapter 21/22: Beyond Physical Memory
  - Swapping Mechanisms, Swapping Policies

64

WE WILL RETURN AT 5:00 PM

65

MORE THAN TWO LEVELS - 2

- Page table entries per page = 512 / 4 = 128
- 7 bytes – for page table index (PTI)



Flag	Detail
Virtual address	30 bit
Page size	512 byte
VPN	21 bit
Offset	9 bit
Page entry per page	128 PTEs

$\log_2 128 = 7$

66

MORE THAN TWO LEVELS - 3

- Consider 1 GB computer: 2^{30}=1GB RAM, 512-byte (2^9 pages)
- 2^{14} = 16,384 page directory entries (PDEs) are required
- When using 2^7 (128 entry) page tables…
- Page size = 512 bytes * 4 bytes per addr



Flag	Detail
Virtual address	30 bit
Page size	512 byte
VPN	21 bit
Offset	9 bit
Page entry per page	128 PTEs → $\log_2 128 = 7$

67

MORE THAN TWO LEVELS - 3

- Consider 1 GB computer: 2^{30}=1GB RAM, 512-byte (2^9 pages)
- 2^{14} = 16,384 page directory entries (PDEs) are required
- When using 2^7 (128 entry) page tables…
- Page size = 512 bytes / 4 bytes per addr

Can't Store Page Directory with 16K pages, using 512 bytes pages. Pages only dereference 128 addresses (512 bytes / 32 bytes)

Virtual address	30 bit
Page size	512 byte
VPN	21 bit
Offset	9 bit
Page entry per page	128 PTEs → $\log_2 128 = 7$

68

MORE THAN TWO LEVELS - 3

- Consider 1 GB computer: 2^{30}=1GB RAM, 512-byte (2^9 pages)
- 2^{14} = 16,384 page directory entries (PDEs) are required
- When using 2^7 (128 entry) page tables…
- Page size = 512 bytes / 4 bytes per addr

Need three level page table:
Page directory 0 (PD Index 0)
Page directory 1 (PD Index 1)
Page Table Index

Virtual address	30 bit
Page size	512 byte
VPN	21 bit
Offset	9 bit
Page entry per page	128 PTEs → $\log_2 128 = 7$

69

MORE THAN TWO LEVELS - 4

- We can now address 1GB with"fine grained" 512 byte pages
- Using multiple levels of indirection



- Consider the implications for address translation!
- How much space is required for a virtual address space with 4 entries on a 512-byte page? (let's say 4 32-bit integers)
- PD0 1 page, PD1 1 page, PT 1 page = 1,536 bytes
- Memory Usage= 1,536 (*3-level*) / 8,388,608 (*1-level*) = .0183% !!!

70

71

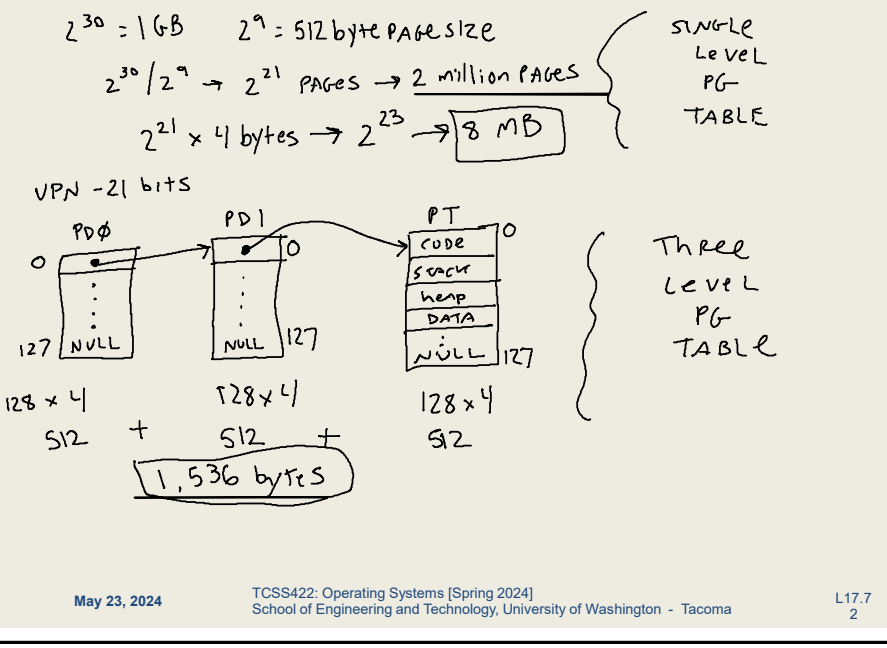
2^{30} = 1 GB
2^9 = 512 byte PAGE size
$2^{30} / 2^9 \rightarrow 2^{21}$ PAGES → 2 million PAGES
$2^{21} \times 4$ bytes → 2^{23} → 8 MB
SINGLE LEVEL PG TABLE
VPN - 21 bits
PD0
PD1
PT
0
127
NULL
CODE
STACK
HEAP
DATA
NULL
128 x 4
512
+
1,536 bytes
THREE LEVEL PG TABLE

72

ADDRESS TRANSLATION CODE

```
// 5-level Linux page table address lookup
//
// Inputs:
// mm_struct - process's memory map struct
// vpage - virtual page address

// Define page struct pointers
pgd_t *pgd;
p4d_t *p4d;
pud_t *pud;
pmd_t *pmt;
pte_t *pte;
struct page *page;
```


73

ADDRESS TRANSLATION - 2

```
pgd = pgd_offset(mm, vpage);
if (pgd_none(*pgd) || pgd_bad(*pgd))
    return 0;
p4d = p4d_offset(pgd, vpage);
if (p4d_none(*p4d) || p4d_bad(*p4d))
    return 0;
pud = pud_offset(p4d, vpage);
if (pud_none(*pud) || pud_bad(*pud))
    return 0;
pmd = pmd_offset(pud, vpage);
if (pmd_none(*pmd) || pmd_bad(*pmd))
    return 0;
if (!(pte = pte_offset_map(pmd, vpage)))
    return 0;
if (!(page = pte_page(*pte)))
    return 0;
physical_page_addr = page_to_phys(page);
pte_unmap(pte);
return physical_page_addr;  // param to send back
```

pgd_offset():
Takes a vpage address and the mm_struct for the process, returns the PGD entry that covers the requested address…

p4d/pud/pmd_offset():
Takes a vpage address and the pgd/p4d/pud entry and returns the relevant p4d/pud/pmd.

pte_unmap()
release temporary kernel mapping for the page table entry

74

INVERTED PAGE TABLES

- Keep a single page table for each physical page of memory
- Consider 4GB physical memory
- Using 4KB pages, page table requires 4MB to map all of RAM
- Page table stores
  - Which process uses each page
  - Which process virtual page (from process virtual address space) maps to the physical page
- All processes share the same page table for memory mapping, kernel must isolate all use of the shared structure
- Finding process memory pages requires search of 2^{20} pages
- Hash table: can index memory and speed lookups

75

MULTI-LEVEL PAGE TABLE EXAMPLE

- Consider a 16 MB computer which indexes memory using 4KB pages
- **(#1)** For a single level page table, how many pages are required to index memory?
- **(#2)** How many bits are required for the VPN?
- **(#3)** Assuming each page table entry (PTE) can index any byte on a 4KB page, how many offset bits are required?
- **(#4)** Assuming there are 8 status bits, how many bytes are required for each page table entry?

76

MULTI LEVEL PAGE TABLE EXAMPLE - 2

- (#5) How many bytes (or KB) are required for a single level page table?
- Let's assume a simple HelloWorld.c program.
- HelloWorld.c requires virtual address translation for 4 pages:
  - 1 – code page
  - 1 – stack page
  - 1 – heap page
  - 1 – data segment page
- (#6) Assuming a two-level page table scheme, how many bits are required for the Page Directory Index (PDI)?
- (#7) How many bits are required for the Page Table Index (PTI)?

77

MULTI LEVEL PAGE TABLE EXAMPLE - 3

- Assume each page directory entry (PDE) and page table entry (PTE) requires 4 bytes:
  - 6 bits for the Page Directory Index (PDI)
  - 6 bits for the Page Table Index (PTI)
  - 12 offset bits
  - 8 status bits
- (#8) How much **total** memory is required to index the HelloWorld.c program using a two-level page table when we only need to translate 4 total pages?
- HINT: we need to allocate one Page Directory and one Page Table…
- HINT: how many entries are in the PD and PT

78

MULTI LEVEL PAGE TABLE EXAMPLE - 4

- **(#9)** Using a single page directory entry (PDE) pointing to a single page table (PT), if all of the slots of the page table (PT) are in use, what is the total amount of memory a two-level page table scheme can address?
- **(#10)** And finally, for this example, as a percentage (%), how much memory does the 2-level page table scheme consume compared to the 1-level scheme?
- HINT: two-level memory use / one-level memory use

79

ANSWERS

- #1 – 4096 pages
- #2 – 12 bits
- #3 – 12 bits
- #4 – 4 bytes
- #5 – 4096 x 4 = 16,384 bytes (16KB)
- #6 – 6 bits
- #7 – 6 bits
- #8 – 256 bytes for Page Directory (PD) (64 entries x 4 bytes)
  256 bytes for Page Table (PT) **TOTAL = 512 bytes**
- #9 – 64 entries, where each entry maps a 4,096 byte page
  With 12 offset bits, can address 262,144 bytes (256 KB)
- #10- 512/16384 = .03125 → 3.125%

80

OBJECTIVES – 5/23

- Questions from 5/21
- Memory Segmentation Activity + answers (available in Canvas)
- Assignment 2 – May 31
- Assignment 3: (Tutorial) Intro to Linux Kernel Modules - June 9
- Final exam – Thursday June 6 @ 3:40pm
- Quiz 4 – Page Tables - Due June 6 @ 11:59 am
- Chapter 19: Translation Lookaside Buffer (TLB)
  - TLB Algorithm, Hit-to-Miss Ratios
- Chapter 20: Paging: Smaller Tables
  - Smaller Tables, Multi-level Page Tables, N-level Page Tables
- **Chapter 21/22: Beyond Physical Memory**
  - Swapping Mechanisms, Swapping Policies

81

CHAPTER 21/22: BEYOND PHYSICAL MEMORY

82

MEMORY HIERARCHY

- Disks (HDD, SSD) provide another level of storage in the memory hierarchy

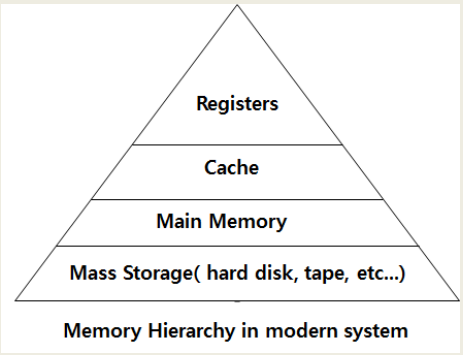

83

MOTIVATION FOR EXPANDING THE ADDRESS SPACE

- Provide the illusion of an address space larger than physical RAM
- For a single process
  - Convenience
  - Ease of use
- For multiple processes
  - Large virtual memory space supports running *many concurrent processes. . .*

84

LATENCY TIMES

- Design considerations:
  - SSDs 4x the time of DRAM
  - HDDs 80x the time of DRAM

Action	Latency (ns)	(µs)	
L1 cache reference	0.5ns		
L2 cache reference	7 ns		14x L1 cache
Mutex lock/unlock	25 ns		
Main memory reference	100 ns		20x L2 cache, 200x L1
Read 4K randomly from SSD*	150,000 ns	150 µs	~1GB/sec SSD
Read 1 MB sequentially from memory	250,000 ns	250 µs	
Read 1 MB sequentially from SSD*	1,000,000 ns	1,000 µs	1 ms ~1GB/sec SSD, 4X memory
Read 1 MB sequentially from disk	20,000,000 ns	20,000 µs	20 ms 80x memory, 20X SSD

- *Latency numbers every programmer should know*
- From: https://gist.github.com/jboner/2841832#file-latency-txt

OBJECTIVES – 5/23

- Questions from 5/21
- Memory Segmentation Activity + answers (available in Canvas)
- Assignment 2 – May 31
- Assignment 3: (Tutorial) Intro to Linux Kernel Modules - June 9
- Final exam – Thursday June 6 @ 3:40pm
- Quiz 4 – Page Tables - Due June 6 @ 11:59 am
- Chapter 19: Translation Lookaside Buffer (TLB)
  - TLB Algorithm, Hit-to-Miss Ratios
- Chapter 20: Paging: Smaller Tables
  - Smaller Tables, Multi-level Page Tables, N-level Page Tables
- Chapter 21/22: Beyond Physical Memory
  - **Swapping Mechanisms** Swapping Policies

SWAP SPACE

- Disk space for storing memory pages
- "Swap" them in and out of memory to disk as needed

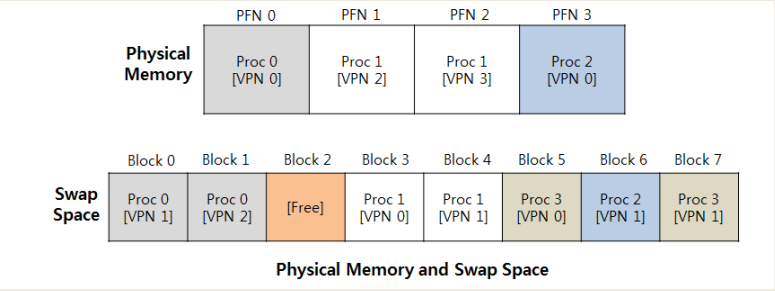

Physical Memory and Swap Space

87

SWAP SPACE - 2

- The size of the swap space can be seen using the Linux free command: "free –h"

```
wlloyd@dione:~$ free -h
               total        used        free      shared  buff/cache   available
Mem:            30G         11G         14G         1.3G        4.4G         17G
Swap:           31G          0B         31G
```

- With sufficient disk space, a common allocation is to create Swap space greater than or equal to physical RAM

88

SWAP SPACE - 3

- Swap space lives on a separate logical volume in Ubuntu Linux that is managed separately from the root file system
- Check logical volumes with "sudo lvdisplay" command:

```
--- Logical volume ---
LV Path                /dev/ubuntu-vg/swap_1
LV Name                swap_1
VG Name                ubuntu-vg
LV UUID                G1Ovj6-4M33-2YXY-YETH-wf7V-93vF-QRQytG
LV Write Access        read/write
LV Creation host, time ubuntu, 2018-09-30 15:44:16 -0700
LV Status              available
# open                 2
LV Size                976.00 MiB
Current LE             244
Segments               1
Allocation             inherit
Read ahead sectors     auto
- currently set to     256
Block device           253:1
```

- See also "lvm lvs" command

PAGE LOCATION

- Memory pages are:
  - Stored in memory
  - Swapped to disk
- Present bit
  - In the page table entry (PTE) indicates if page is present
- Page fault
  - Memory page is accessed, but has been swapped to disk

PAGE FAULT

- OS steps in to handle the page fault
- Loading page from disk requires a free memory page
- Page-Fault Algorithm

```
1:      PFN = FindFreePhysicalPage()
2:      if (PFN == -1)                  // no free page found
3:              PFN = EvictPage()       // run replacement algorithm
4:      DiskRead(PTE.DiskAddr, pfn)     // sleep (waiting for I/O)
5:      PTE.present = True              // set PTE bit to present
6:      PTE.PFN = PFN                   // reference new loaded page
7:      RetryInstruction()              // retry instruction
```


91

PAGE REPLACEMENTS

- Page daemon
  - Background threads which monitors swapped pages
- Low watermark (LW)
  - Threshold for when to swap pages to disk
  - Daemon checks: free pages < LW
  - Begin swapping to disk until reaching the highwater mark
- High watermark (HW)
  - Target threshold of free memory pages
  - Daemon free until: free pages >= HW

92

OBJECTIVES – 5/23

- Questions from 5/21
- Memory Segmentation Activity + answers (available in Canvas)
- Assignment 2 – May 31
- Assignment 3: (Tutorial) Intro to Linux Kernel Modules - June 9
- Final exam – Thursday June 6 @ 3:40pm
- Quiz 4 – Page Tables - Due June 6 @ 11:59 am
- Chapter 19: Translation Lookaside Buffer (TLB)
  - TLB Algorithm, Hit-to-Miss Ratios
- Chapter 20: Paging: Smaller Tables
  - Smaller Tables, Multi-level Page Tables, N-level Page Tables
- Chapter 21/22: Beyond Physical Memory
  - Swapping Mechanisms, **Swapping Policies**

93

REPLACEMENT POLICIES

94

CACHE MANAGEMENT

- Replacement policies apply to "any" cache
- Goal is to minimize the number of misses
- Average memory access time (AMAT) can be estimated:

$$AMAT = (P_{Hit} * T_M) + (P_{Miss} * T_D)$$

Argument	Meaning
T_M	The cost of accessing memory (time)
T_D	The cost of accessing disk (time)
P_{Hit}	The probability of finding the data item in the cache(a hit)
P_{Miss}	The probability of not finding the data in the cache(a miss)

- Consider T_M = 100 ns, T_D = 10ms
- Consider P_{hit} = .9 (90%), P_{miss} = .1
- Consider P_{hit} = .999 (99.9%), P_{miss} = .001

OPTIMAL REPLACEMENT POLICY

- What if:
  - We could predict the future (… with a magical oracle)
  - All future page accesses are known
  - Always replace the page in the cache used farthest in the future
- Used for a comparison
- Provides a "best case" replacement policy
- Consider a 3-element empty cache with the following page accesses:

0 1 2 0 1 3 0 3 1 2 1

What is the hit/miss ratio?

6 hits

FIFO REPLACEMENT

- Queue based
- **Always replace the oldest element** at the back of cache
- Simple to implement
- Doesn't consider importance… just arrival ordering
- Consider a 3-element empty cache with the following page accesses:

  0 1 2 0 1 3 0 3 1 2 1

- What is the hit/miss ratio? **4 hits**
- How is FIFO different than LRU? **LRU incorporates history**

97

RANDOM REPLACEMENT

- Pick a page at random to replace
- Simple and fast implementation
- Performance depends on luck of random choices

0 1 2 0 1 3 0 3 1 2 1

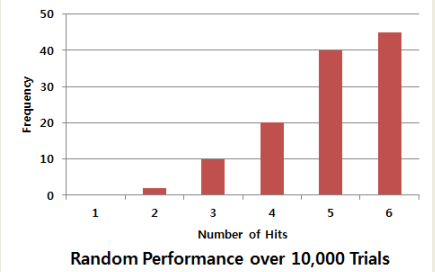

Random Performance over 10,000 Trials

98

HISTORY-BASED POLICIES

- LRU: Least recently used
- Always replace page with oldest access time (front)
- Always move end of cache when element is read again
- LRU requires constant reorganization of the cache
- Considers temporal locality (*when pg was last accessed*)

0 1 2 0 1 3 0 3 1 2 1

What is the hit/miss ratio?

6 hits

- LFU: Least frequently used
- Always replace page with the fewest # of accesses (front)
- Incorporates frequency of use - *must track pg accesses*
- Consider frequency of page accesses

0 1 2 0 1 3 0 3 1 2 1

Hit/miss ratio is=6 hits

99

Consider a 3-element cache. With a FIFO replacement policy, how many hits occur with the following page access sequence:

1 2 0 1 3 1 2 0 2 1 3

2 hits

3 hits

4 hits

5 hits

6 hits

100

Consider a 3-element cache. With an LRU replacement policy, how many hits occur with the following page access sequence:

1 2 0 1 3 1 2 0 2 1 3

2 hits

3 hits

4 hits

5 hits

6 hits

101

WORKLOAD EXAMPLES: NO-LOCALITY

- No-Locality (Random Access) Workload
  - Perform 10,000 random page accesses
  - Across set of 100 memory pages

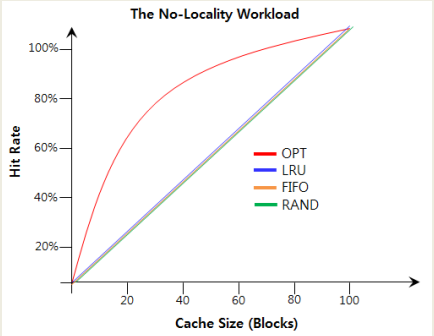

When the cache is large enough to fit the entire workload, it doesn't matter which policy you use.

102

WORKLOAD EXAMPLES: 80/20

- 80/20 Workload
  - Perform 10,000 page accesses, against set of 100 pages
  - 80% of accesses are to 20% of pages (hot pages)
  - 20% of accesses are to 80% of pages (cold pages)

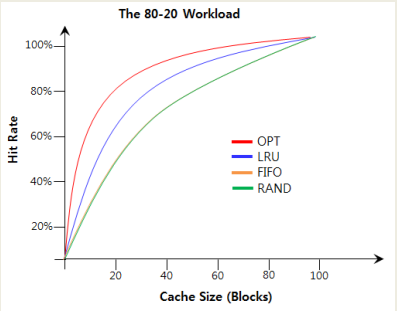

LRU is more likely to hold onto hot pages

(recalls history)

103

WORKLOAD EXAMPLES: SEQUENTIAL

- Looping sequential workload
  - Refer to 50 pages in sequence: 0, 1, …, 49
  - Repeat loop

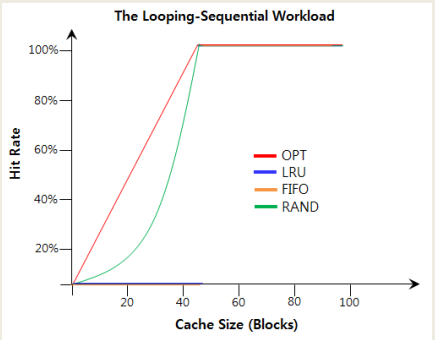

Random performs better than FIFO and LRU for cache sizes < 50

Algorithms should provide "scan resistance"

104

With small cache sizes, for the looping sequential workload, why do FIFO and LRU fail to provide cache hits?

Cache hits in this scenario require consideration of how frequently accessed memory is for cache replacement

Memory accesses are unpredictable and too random. Unpredictable accesses require a random cache replacement policy for cache hits

Memory accesses to elements that are accessed repeatedly are too spread apart temporally to benefit from caching

Unlike Random cache replacement, both FIFO and LRU fail to speculate memory accesses in advance to improve caching

None of the above

Start the presentation to see live content. For screen share software, share the entire screen. Get help at **pollev.com/app**

105

IMPLEMENTING LRU

- Implementing last recently used (LRU) requires tracking access time for all system memory pages
- Times can be tracked with a list
- For cache eviction, we must scan an entire list
- Consider: 4GB memory system (2^{32}), with 4KB pages (2^{12})
- This requires 2^{20} comparisons !!!
- Simplification is needed
  - Consider how to approximate the oldest page access

106

IMPLEMENTING LRU - 2

- Harness the Page Table Entry (PTE) Use Bit
- HW sets to 1 when page is used
- OS sets to 0

- Clock algorithm (*approximate LRU*)
  - Refer to pages in a circular list
  - Clock hand points to current page
  - Loops around
    - IF USE_BIT=1 set to USE_BIT = 0
    - IF USE_BIT=0 replace page

107

CLOCK ALGORITHM

- Not as efficient as LRU, but better than other replacement algorithms that do not consider history

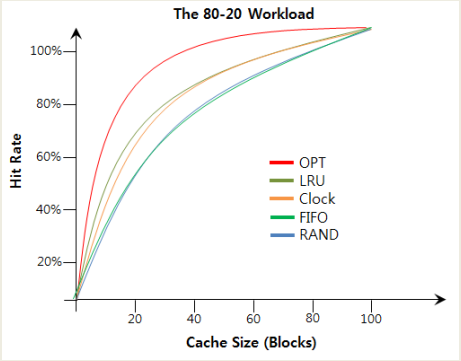

108

CLOCK ALGORITHM - 2

- Consider dirty pages in cache
- If DIRTY (modified) bit is FALSE
  - No cost to evict page from cache
- If DIRTY (modified) bit is TRUE
  - Cache eviction requires updating memory
  - Contents have changed
- Clock algorithm should favor no cost eviction

109

WHEN TO LOAD PAGES

- On demand → demand paging
- Prefetching
  - Preload pages based on anticipated demand
  - Prediction based on locality
  - Access page P, suggest page P+1 may be used
- What other techniques might help anticipate required memory pages?
  - Prediction models, historical analysis
  - In general: accuracy vs. effort tradeoff
  - High analysis techniques struggle to respond in real time

110

OTHER SWAPPING POLICIES

- Page swaps / writes
  - Group/cluster pages together
  - Collect pending writes, perform as batch
  - Grouping disk writes helps amortize latency costs
- Thrashing
  - Occurs when system runs many memory intensive processes and is low in memory
  - Everything is constantly swapped to-and-from disk

111

OTHER SWAPPING POLICIES - 2

- Working sets
  - Groups of related processes
  - When thrashing: prevent one or more working set(s) from running
  - Temporarily reduces memory burden
  - Allows some processes to run, reduces thrashing

112

QUESTIONS

113