TCSS 422: OPERATING SYSTEMS

Operating Systems – Three Easy Pieces & Processes

Wes J. Lloyd
School of Engineering and Technology
University of Washington - Tacoma

1

OBJECTIVES – 3/28

- Questions from 3/26
- C Review Survey - available thru 4/5
- Student Background Survey
- Virtual Machine Survey
- Chapter 2: Operating Systems – Three Easy Pieces
  - Concepts of virtualization/abstraction
  - Three Easy Pieces: CPU, Memory, I/O
  - Concurrency
  - Operating system design goals
- Chapter 4: Processes
  - Process states, context switches
  - Kernel data structures for processes and threads

2

ONLINE DAILY FEEDBACK SURVEY

- Daily Feedback Quiz in Canvas – Available After Each Class
- Extra credit available for completing surveys ***ON TIME***
- Tuesday surveys: due by ~ Wed @ 9p, cutoff 11:59p
- Thursday surveys: due ~ Mon @ 9p, cutoff 11:59p

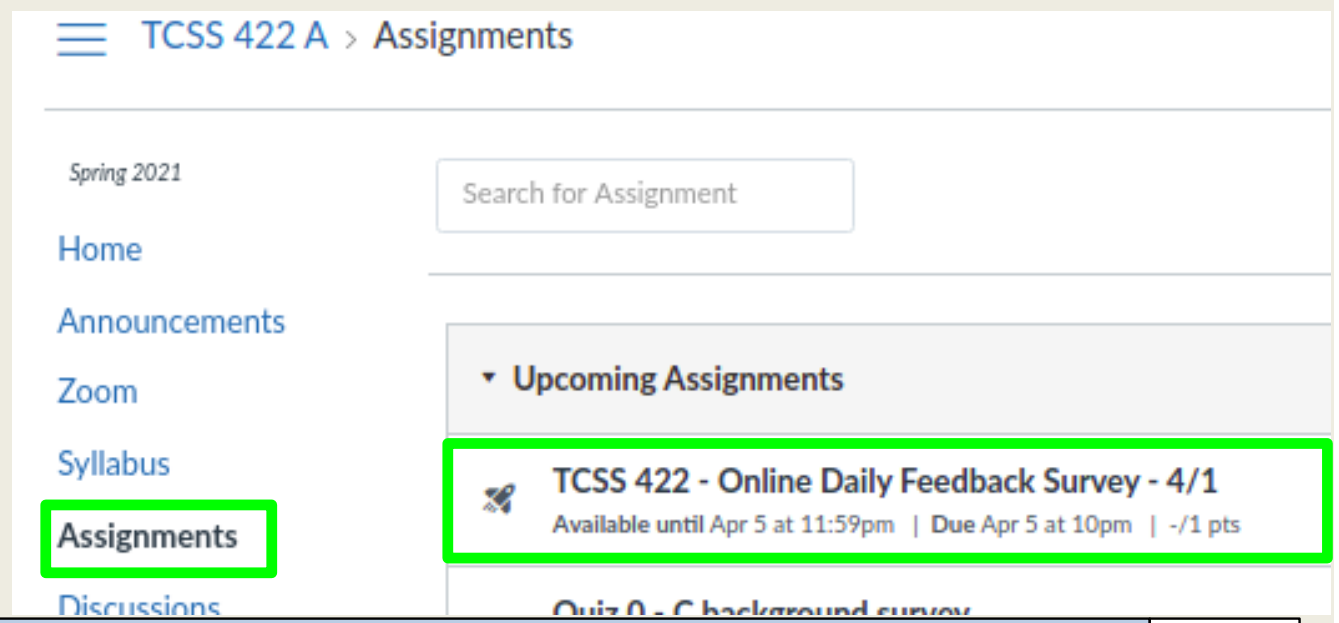

3

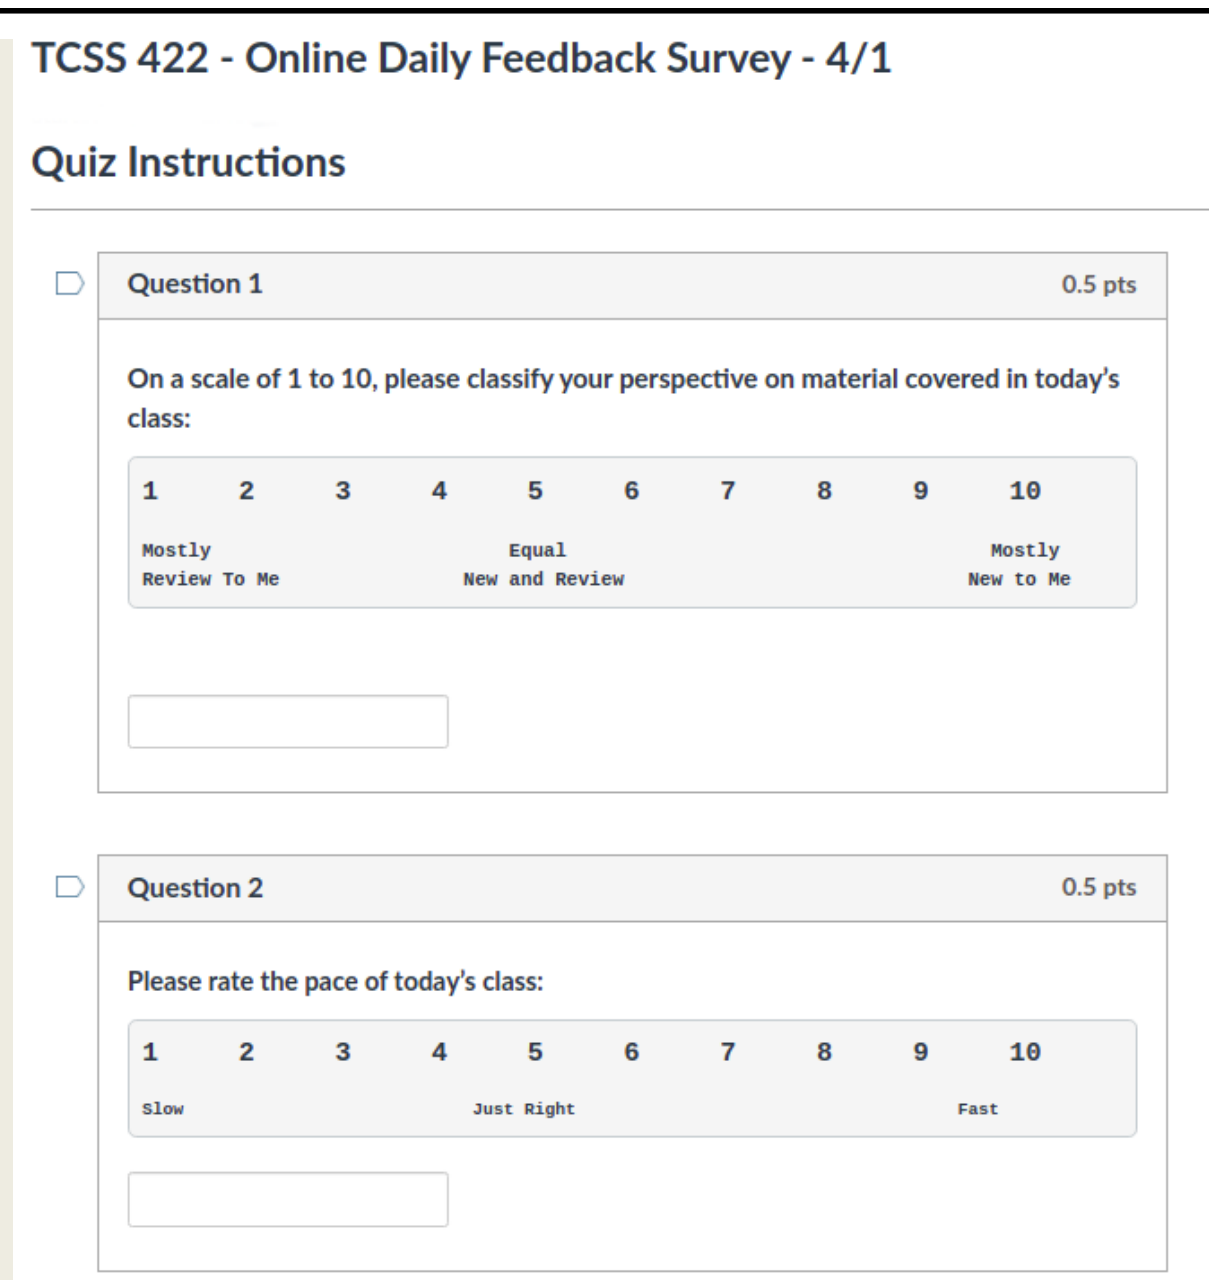

4

MATERIAL / PACE

- Please classify your perspective on material covered in today's class (36 respondents):
- 1-mostly review, 5-equal new/review, 10-mostly new
- **Average – 5.44** (*Spring 2024, 6.18*)

- Please rate the pace of today's class:
- 1-slow, 5-just right, 10-fast
- **Average – 5.22** (*Spring 2024, 5.91*)

FEEDBACK FROM 3/26

- ***I was curious if we will be learning solely about Linux, or other operating systems like BSD, Unix, Solaris, Windows, and MacOS.***

- This course focuses on the concepts of operating systems, and in particular the virtualization of the CPU, memory, and disks
- We primarily use Linux (Ubuntu), but concepts apply to any OS
- We do not focus on comparing features of various OSes (e.g. BSD, Unix, Solaris, etc.) per se…

FEEDBACK - 2

- ***Is there a difference between multithreading and parallel processing?***

7

FEEDBACK - 3

- ***Visualizing memory, and separating virtual vs physical memory is still a little abstract.***
- We delve into memory later on in the course.
- Linux manages all memory in 4 KB pages
- There are four primary types:
- Code pages, heap pages (for dynamic memory), stack pages (for data you pass in/out of functions), and data pages (for global data)
- Code consists of your program code, and shared library code
  - The idea with shared libraries is the OS saves spaces by only loading them once, and sharing them with multiple programs
- You can visualize the memory of a process using the **"proc" filesystem** (under /proc), which is a virtual directory of dynamic generated files to inspect the system and processes

8

RESOURCES

- Textbook coupon 10% off "BCORPBOOKS10" until Friday at 11:59pm
- Hardcover edition (version 1.1) from lulu.com:
- https://www.lulu.com/shop/andrea-arpaci-dusseau-and-remzi-arpaci-dusseau/operating-systems-three-easy-pieces-hardcover-version-110/hardcover/product-15gjeeky.html?q=three+easy+pieces+softcover&page=1&pageSize=4
- With coupon textbook is only $35.77 + tax & shipping

9

OBJECTIVES – 3/28

- Questions from 3/26
- **C Review Survey - available thru 4/5**
- Student Background Survey
- Virtual Machine Survey
- Chapter 2: Operating Systems – Three Easy Pieces
  - Concepts of virtualization/abstraction
  - Three Easy Pieces: CPU, Memory, I/O
  - Concurrency
  - Operating system design goals
- Chapter 4: Processes
  - Process states, context switches
  - Kernel data structures for processes and threads

10

C REVIEW SURVEY - AVAILABLE THRU 4/5

11

OBJECTIVES – 3/28

- Questions from 3/26
- C Review Survey - available thru 4/5
- **Student Background Survey**
- Virtual Machine Survey
- Chapter 2: Operating Systems – Three Easy Pieces
  - Concepts of virtualization/abstraction
  - Three Easy Pieces: CPU, Memory, I/O
  - Concurrency
  - Operating system design goals
- Chapter 4: Processes
  - Process states, context switches
  - Kernel data structures for processes and threads

12

STUDENT BACKGROUND SURVEY

- Please complete the Student Background Survey
- https://forms.gle/L1VWMoYrNueKe88dA
- 37 of 43 Responses as of 3/27 @ ~11pm
- Current Standings:
  - Best Office Hours times so far:
    - Rank #1: Tuesday after class (> 5:40p) – 53.3%
    - Rank #2: Thursday after class (> 5:40p) – 50.0%
    - Rank #3: Monday morning (before noon) – 46.7%
  - Best lecture format:
    - Rank #1: Hybrid synchronous w/ recordings (88.6%)
    - Rank #2: In-person w/ recordings (40%)
- Will consider survey results through Mon Apr 1

13

OBJECTIVES – 3/28

- Questions from 3/26
- C Review Survey - available thru 4/5
- Student Background Survey
- **Virtual Machine Survey**
- Chapter 2: Operating Systems – Three Easy Pieces
  - Concepts of virtualization/abstraction
  - Three Easy Pieces: CPU, Memory, I/O
  - Concurrency
  - Operating system design goals
- Chapter 4: Processes
  - Process states, context switches
  - Kernel data structures for processes and threads

14

VIRTUAL MACHINE SURVEY

- Please complete the Virtual Machine Survey to request a "School of Engineering and Technology" remote hosted Ubuntu VM
- **https://forms.gle/vuEv5bsW57Ki4ZpDA**
- **32 of 43 Responses as of 3/29 @ ~11pm**
- **Will close Wednesday 4/5...**
- **VM requests will be sent to SET for creation**
- **Survey response not required if no VM desired**

March 28, 2024	TCSS422: Operating Systems [Spring 2024] School of Engineering and Technology, University of Washington - Tacoma	L2.15

15

OBJECTIVES – 3/28

- Questions from 3/26
- C Review Survey - available thru 4/5
- Student Background Survey
- Virtual Machine Survey
- Chapter 2: Operating Systems – Three Easy Pieces
  - **Concepts of virtualization/abstraction**
  - Three Easy Pieces: CPU, Memory, I/O
  - Concurrency
  - Operating system design goals
- Chapter 4: Processes
  - Process states, context switches
  - Kernel data structures for processes and threads

March 28, 2024	TCSS422: Operating Systems [Spring 2024] School of Engineering and Technology, University of Washington - Tacoma	L2.16

16

ABSTRACTIONS

- What form of abstraction does the OS provide?
  - CPU
    - Process and/or thread
  - Memory
    - Address space
    - → large array of bytes
    - All programs see the same "size" of RAM
  - Disk
    - Files, File System(s)

WHY ABSTRACTION?

- Allow applications to reuse common facilities
- Make different devices look the same
  - Easier to write common code to use devices
    - Linux/Unix Block Devices
- Provide higher level abstractions
- More useful functionality

ABSTRACTION CHALLENGES

- What level of abstraction?
  - How much of the underlying hardware should be exposed?
    - What if **too much**?
    - What if **too little**?
- What are the correct abstractions?
  - Security concerns

OBJECTIVES – 3/28

- Questions from 3/26
- C Review Survey - available thru 4/5
- Student Background Survey
- Virtual Machine Survey
- Chapter 2: Operating Systems – Three Easy Pieces
  - Concepts of virtualization/abstraction
  - **Three Easy Pieces: CPU**, Memory, I/O
  - Concurrency
  - Operating system design goals
- Chapter 4: Processes
  - Process states, context switches
  - Kernel data structures for processes and threads

VIRTUALIZING THE CPU

- Each running program gets its own "virtual" representation of the CPU
- Many programs seem to run at once
- Linux: "top" command shows process list
- Windows: task manager



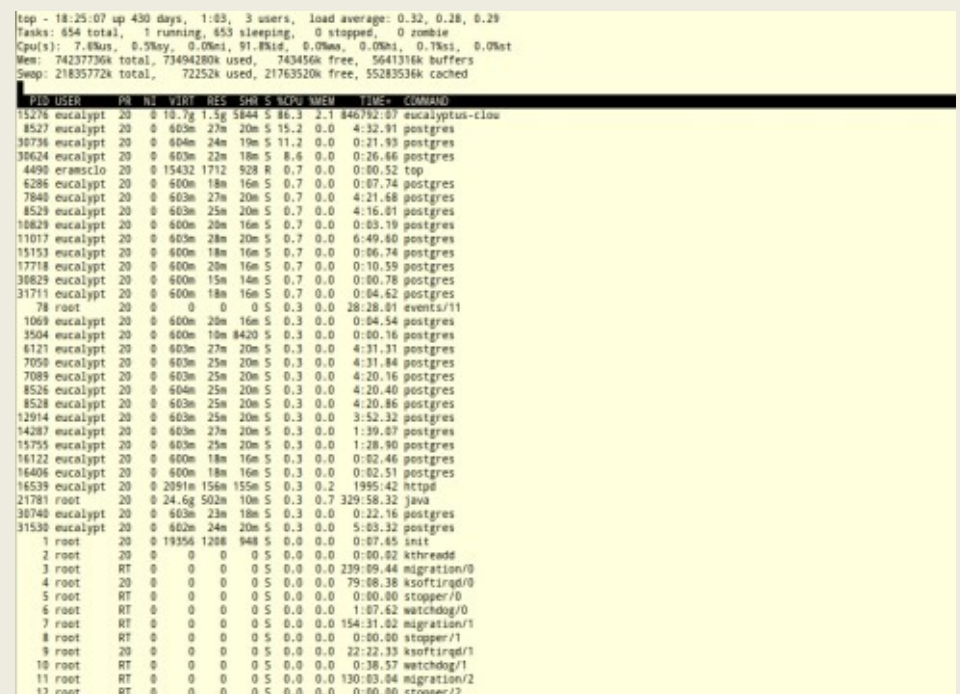

VIRTUALIZING THE CPU - 2

- Simple Looping C Program

```c
#include <stdio.h>
#include <stdlib.h>
#include <sys/time.h>
#include <assert.h>
#include "common.h"

int
main(int argc, char *argv[])
{
        if (argc != 2) {
                fprintf(stderr, "usage: cpu <string>\n");
                exit(1);
        }
        char *str = argv[1];
        while (1) {
                Spin(1); // Repeatedly checks the time and
                returns once it has run for a second
                printf("%s\n", str);
        }
        return 0;
}
```

VIRTUALIZING THE CPU - 3

```
prompt> gcc -o cpu cpu.c -Wall
prompt> ./cpu "A"
A
A
A
^C
prompt>
```

- Runs forever, must Ctrl-C to halt…

VIRTUALIZATION THE CPU - 4

```
prompt> ./cpu A & ; ./cpu B & ; ./cpu C & ; ./cpu D &
[1] 7353
[2] 7354
[3] 7355
[4] 7356
A
B
D
C
A
B
D
C
A
C
B
D
...
```

Even though we have only one processor, all four instances of our program seem to be running at the same time!

MANAGING PROCESSES FROM THE CLI

- & - run a job in the background
- fg – brings a job to the foreground
- bg – sends a job to the background
- CTRL-Z to suspend a job
- CTRL-C to kill a job
- “jobs” command – lists running jobs
- “jobs –p” command – lists running jobs by process ID

- top –d .2 — top utility shows active running jobs like the Windows task manager
- top –H –d .2 — display all processes & threads
- top –H –p <pid> — display all threads of a process
- htop — alternative to top, shows CPU core graphs

OBJECTIVES – 3/28

- Questions from 3/26
- C Review Survey - available thru 4/5
- Student Background Survey
- Virtual Machine Survey

- Chapter 2: Operating Systems – Three Easy Pieces
  - Concepts of virtualization/abstraction
  - **Three Easy Pieces:** CPU, **Memory**, I/O
  - Concurrency
  - Operating system design goals
- Chapter 4: Processes
  - Process states, context switches
  - Kernel data structures for processes and threads

VIRTUALIZING MEMORY

- Computer memory is treated as a large array of bytes
- Programs store all data in this large array
  - **Read memory (load)**
  - Specify an address to read data from
  - **Write memory (store)**
  - Specify data to write to an address

VIRTUALIZING MEMORY - 2

- Program to read/write memory: (**mem.c**) (from ch. 2 pgs. 5-6)

```
#include <unistd.h>
#include <stdio.h>
#include <stdlib.h>
#include "common.h"

int
main(int argc, char *argv[])
{
        int *p = malloc(sizeof(int));  // a1: allocate some
                                    memory
        assert(p != NULL);
        printf("(%d) address of p: %08x\n",
                getpid(), (unsigned) p);  // a2: print out the
                                    address of the memmory
        *p = 0;  // a3: put zero into the first slot of the memory
        while (1) {
                Spin(1);
                *p = *p + 1;
                printf("(%d) p: %d\n", getpid(), *p); // a4
        }
        return 0;
}
```

VIRTUALIZING MEMORY - 3

- Output of **mem.c** (example from ch. 2 pgs. 5-6)

```
prompt> ./mem
(2134) memory address of p: 00200000
(2134) p: 1
(2134) p: 2
(2134) p: 3
(2134) p: 4
(2134) p: 5
^C
```

- int value stored at virtual address 00200000
- program increments int value pointed to by p

VIRTUALIZING MEMORY - 4

- Multiple instances of **mem.c**

By default this example no longer works as advertised !

Ubuntu now applies address space randomization (ASR) by default.

ASR makes the ptr location of program instances not identical. Having identical addresses is considered a security issue.

```
prompt> ./mem &; ./mem &
[1] 24113
[2] 24114
(24113) memory address of p: 00200000
(24114) memory address of p: 00200000
(24113) p: 1
(24114) p: 1
(24114) p: 2
(24113) p: 2
(24113) p: 3
(24114) p: 3
...
```

- BOOK SHOWS:(int*)p with the same memory location **00200000**
- To disable ASR: `'echo 0 | tee /proc/sys/kernel/randomize_va_space'`
- Why does modifying the value of *p in program #1 (PID 24113), not interfere with the value of *p in program #2 (PID 24114) ?
  - The OS has "virtualized" memory, and provides a "virtual" address

VIRTUAL MEMORY

- Key take-aways:
- Each process (program) has its own ***virtual address space***
- The OS maps virtual ***address spaces*** onto ***physical memory***
- A memory reference from one process can not affect the address space of others.
  - ***Isolation***
- Physical memory, a shared resource, is managed by the OS

March 28, 2024 | TCSS422: Operating Systems [Spring 2024] School of Engineering and Technology, University of Washington - Tacoma | L2.31

31

WE WILL RETURN AT 5:00PM

March 28, 2024 | TCSS422: Operating Systems [Spring 2024] School of Engineering and Technology, University of Washington - coma | L2.32

32

OBJECTIVES – 3/28

- Questions from 3/26
- C Review Survey - available thru 4/5
- Student Background Survey
- Virtual Machine Survey
- Chapter 2: Operating Systems – Three Easy Pieces
  - Concepts of virtualization/abstraction
  - **Three Easy Pieces:** CPU, Memory, I/O
  - Concurrency
  - Operating system design goals
- Chapter 4: Processes
  - Process states, context switches
  - Kernel data structures for processes and threads

March 28, 2024	TCSS422: Operating Systems [Spring 2024] School of Engineering and Technology, University of Washington - Tacoma	L2.33

33

WHY PERSISTENCE ?

- DRAM: Dynamic Random Access Memory: DIMMs/SIMMs
  - Store data while power is present
  - When power is lost, data is lost (*i.e. volatile memory*)
- Operating System helps “persist” data more **permanently**
  - I/O device(s): hard disk drive (HDD), solid state drive (SSD)
  - File system(s): “catalog” data for storage and retrieval

March 28, 2024	TCSS422: Operating Systems [Spring 2024] School of Engineering and Technology, University of Washington - Tacoma	L2.34

34

PERSISTENCE - 2

```c
#include <stdio.h>
#include <unistd.h>
#include <assert.h>
#include <fcntl.h>
#include <sys/types.h>

int
main(int argc, char *argv[])
{
        int fd = open("/tmp/file", O_WRONLY | O_CREAT
                      | O_TRUNC, S_IRWXU);
        assert(fd > -1);
        int rc = write(fd, "hello world\n", 13);
        assert(rc == 13);
        close(fd);
        return 0;
}
```

- open(), write(), close(): OS ***system calls*** for device I/O
- Note: man page for open(), write() requires page number: `"man 2 open"`, `"man 2 write"`, `"man close"`

35

PERSISTENCE - 3

- To write to disk, OS must:
  - Determine where on disk data should reside
  - Instrument system calls to perform I/O:
    - Read/write to file system (*inode record*)
    - Read/write data to file

- OS provides fault tolerance for system crashes via special filesystem features:
  - **Journaling**: Record disk operations in a journal for replay
  - **Copy-on-write**: replicate shared data across multiple disks *- see ZFS filesystem*
  - Carefully order writes on disk (*especially spindle drives*)

36

OBJECTIVES – 3/28

- Questions from 3/26
- C Review Survey - available thru 4/5
- Student Background Survey
- Virtual Machine Survey
- Chapter 2: Operating Systems – Three Easy Pieces
  - Concepts of virtualization/abstraction
  - Three Easy Pieces: CPU, Memory, I/O
  - **Concurrency**
  - Operating system design goals
- Chapter 4: Processes
  - Process states, context switches
  - Kernel data structures for processes and threads

CONCURRENCY

Linux htop (Ubuntu)

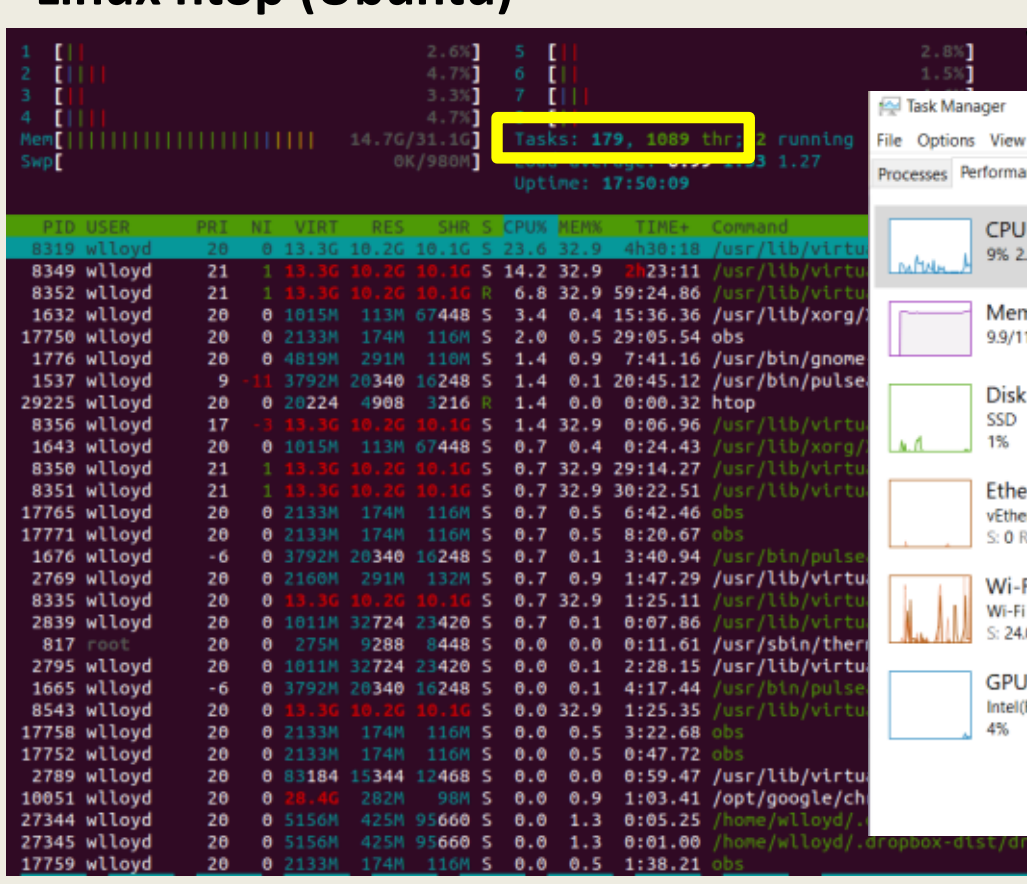

Windows 10 Task Manager

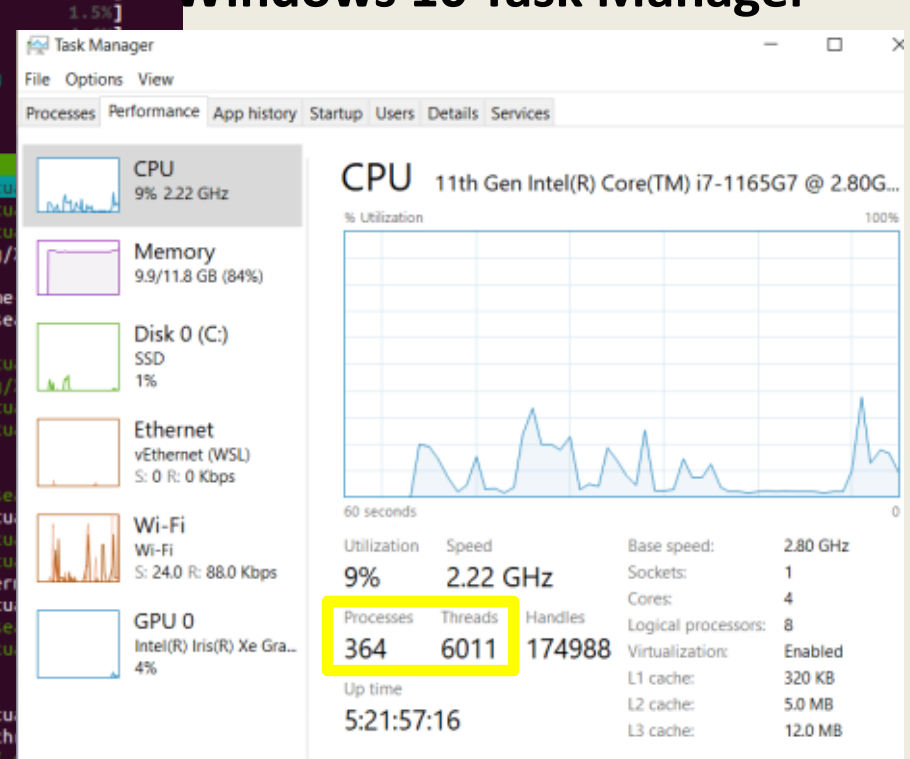

CONCURRENCY

- Linux: 179 processes, 1089 threads (**`htop`**)
- Windows 10: 364 processes, 6011 threads (task mgr)
- OSes appear to run many programs at once, juggling them
- Modern **multi-threaded** programs feature concurrent threads and processes
- ***What is a key difference between a process and a thread?***

CONCURRENCY - 2

```
#include <stdio.h>
#include <stdlib.h>
#include "common.h"

volatile int counter = 0;
int loops;

void *worker(void *arg) {
        int i;
        for (i = 0; i < loops; i++) {
                counter++;
        }
        return NULL;
}
...
```

pthread.c

Listing continues …

CONCURRENCY - 2

```
#include <stdio.h>
#include <stdlib.h>
#include "common.h"

volatile int counter = 0;
int loops;

void
...
}
...
```

Not the same as Java volatile:
Provides a compiler hint than an object may change value unexpectedly (in this case by a separate thread) so aggressive optimization must be avoided.

pthread.c

Listing continues …

CONCURRENCY - 3

pthread.c

```
int
main(int argc, char *argv[])
{
        if (argc != 2) {
                fprintf(stderr, "usage: threads <value>\n");
                exit(1);
        }
        loops = atoi(argv[1]);
        pthread_t p1, p2;
        printf("Initial value : %d\n", counter);

        Pthread_create(&p1, NULL, worker, NULL);
        Pthread_create(&p2, NULL, worker, NULL);
        Pthread_join(p1, NULL);
        Pthread_join(p2, NULL);
        printf("Final value : %d\n", counter);
        return 0;
}
```

- Program creates two threads
- Check documentation: “man pthread_create”
- worker() method counts from 0 to argv[1] (loop)

Linux "man" page

example

```
PTHREAD_CREATE(3)          Linux Programmer's Manual          PTHREAD_CREATE(3)

NAME    top

       pthread_create - create a new thread

SYNOPSIS    top

       #include <pthread.h>

       int pthread_create(pthread_t *thread, const pthread_attr_t *attr,
                          void *(*start_routine) (void *), void *arg);

       Compile and link with -pthread.

DESCRIPTION    top

       The pthread_create() function starts a new thread in the calling
       process.  The new thread starts execution by invoking
       start_routine(); arg is passed as the sole argument of
       start_routine().

       The new thread terminates in one of the following ways:

       * It calls pthread_exit(3), specifying an exit status value that is
         available to another thread in the same process that calls
         pthread_join(3).

       * It returns from start_routine().  This is equivalent to calling
         pthread_exit(3) with the value supplied in the return statement.

       * It is canceled (see pthread_cancel(3)).

       * Any of the threads in the process calls exit(3), or the main thread
         performs a return from main().  This causes the termination of all
         threads in the process.

       The attr argument points to a pthread_attr_t structure whose contents
       are used at thread creation time to determine attributes for the new
       thread; this structure is initialized using pthread_attr_init(3) and
       related functions.  If attr is NULL, then the thread is created with
       default attributes.
```


43

CONCURRENCY - 4

- Command line parameter argv[1] provides loop length
- Defines number of times the shared counter is incremented

- Loops: 1000

```
prompt> gcc -o pthread pthread.c -Wall -pthread
prompt> ./pthread 1000
Initial value : 0
Final value : 2000
```

- Loops 100000

```
prompt> ./pthread 100000
Initial value : 0
Final value : 143012 // huh??
prompt> ./pthread 100000
Initial value : 0
Final value : 137298 // what ???
```



44

CONCURRENCY - 5

- When loop value is large why do we not achieve 200,000 ?

- C code is translated to (3) assembly code operations

1. Load counter variable into register
2. Increment it
3. Store the register value back in memory

- These instructions happen concurrently and VERY FAST
- (P1 || P2) write incremented register values back to memory, While (P1 || P2) read same memory
- Memory access here is **unsynchronized** (**non-atomic**)
- *Some of the increments are lost*

March 28, 2024	TCSS422: Operating Systems [Spring 2024] School of Engineering and Technology, University of Washington - Tacoma	L2.45

45

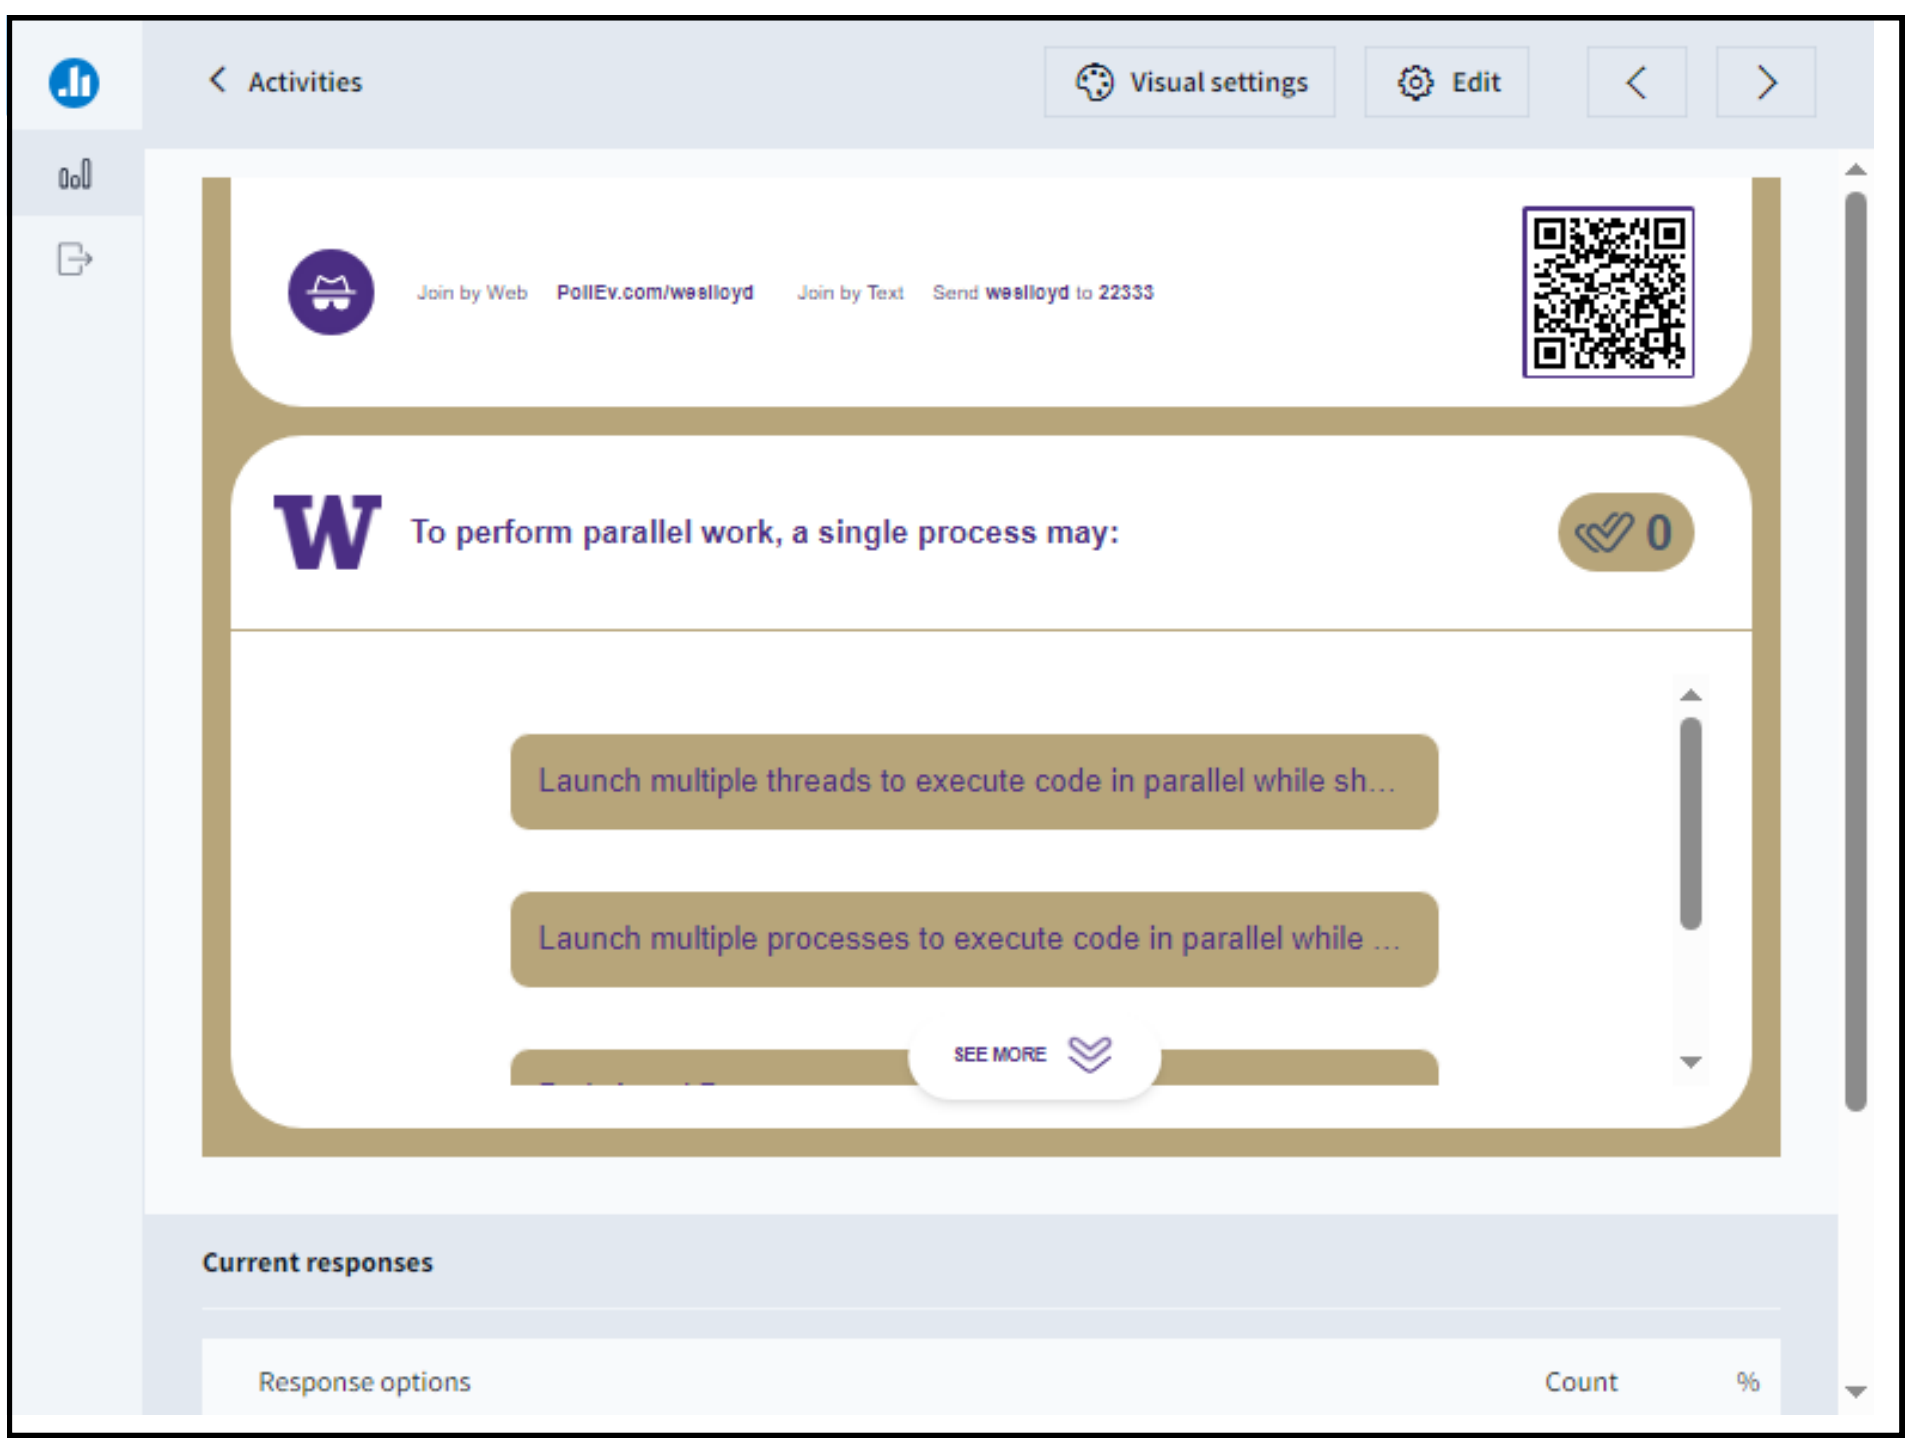

46

PARALLEL PROGRAMMING

- To perform parallel work, a single process may:
- A. Launch multiple threads to execute code in parallel while sharing global data in memory
- B. Launch multiple processes to execute code in parallel without sharing global data in memory
- C. Both A and B
- D. None of the above

March 28, 2024	TCSS422: Operating Systems [Spring 2024] School of Engineering and Technology, University of Washington - Tacoma	L2.47

47

OBJECTIVES – 3/28

- Questions from 3/26
- C Review Survey - available thru 4/5
- Student Background Survey
- Virtual Machine Survey
- Chapter 2: Operating Systems – Three Easy Pieces
  - Concepts of virtualization/abstraction
  - Three Easy Pieces: CPU, Memory, I/O
  - Concurrency
  - **Operating system design goals**
- Chapter 4: Processes
  - Process states, context switches
  - Kernel data structures for processes and threads

March 28, 2024	TCSS422: Operating Systems [Spring 2024] School of Engineering and Technology, University of Washington - Tacoma	L2.48

48

SUMMARY: OPERATING SYSTEM DESIGN GOALS

- **ABSTRACTING THE HARDWARE**
  - Makes programming code easier to write
  - Automate sharing resources – save programmer burden
- **PROVIDE HIGH PERFORMANCE**
  - Minimize overhead from OS abstraction (Virtualization of CPU, RAM, I/O)
  - Share resources fairly
  - Attempt to tradeoff performance vs. fairness → consider priority
- **PROVIDE ISOLATION**
  - User programs can't interfere with each other's virtual machines, the underlying OS, or the sharing of resources

March 28, 2024	TCSS422: Operating Systems [Spring 2024] School of Engineering and Technology, University of Washington - Tacoma	L2.49

49

SUMMARY: OPERATING SYSTEM DESIGN GOALS - 2

- **RELIABILITY**
  - OS must not crash, 24/7 Up-time
  - Poor user programs must not bring down the system:

    Blue Screen

- ***Other Issues:***
  - Energy-efficiency
  - Security (of data)
  - Cloud: Virtual Machines

March 28, 2024	TCSS422: Operating Systems [Spring 2024] School of Engineering and Technology, University of Washington - Tacoma	L2.50

50

OBJECTIVES – 3/28

- Questions from 3/26
- C Review Survey - available thru 4/5
- Student Background Survey
- Virtual Machine Survey
- Chapter 2: Operating Systems – Three Easy Pieces
  - Concepts of virtualization/abstraction
  - Three Easy Pieces: CPU, Memory, I/O
  - Concurrency
  - Operating system design goals
- **Chapter 4: Processes**
  - Process states, context switches
  - Kernel data structures for processes and threads

March 28, 2024 | TCSS422: Operating Systems [Spring 2024] School of Engineering and Technology, University of Washington - Tacoma | L2.51

51



CHAPTER 4: PROCESSES

March 28, 2024 | TCSS422: Operating Systems [Spring 2024] School of Engineering and Technology, University of Washington - Tacoma | L2.52

52

VIRTUALIZING THE CPU

- How should the CPU be shared?
- Time Sharing:
  Run one process, pause it, run another
- The act of swapping process A out of the CPU to run process B is called a:
  - **CONTEXT SWITCH**
- How do we SWAP processes in and out of the CPU efficiently?
  - Goal is to minimize **overhead** of the swap
- **OVERHEAD** is time spent performing OS management activities that don't help accomplish real work

March 28, 2024	TCSS422: Operating Systems [Spring 2024] School of Engineering and Technology, University of Washington - Tacoma	L2.53

53

PROCESS

A process is a running program.

- Process comprises of:
  - Memory
    - Instructions ("the code")
    - Data (heap)
  - Registers
    - PC: Program counter
    - Stack pointer

March 28, 2024	TCSS422: Operating Systems [Spring 2024] School of Engineering and Technology, University of Washington - Tacoma	L2.54

54

PROCESS API

- Modern OSes provide a Process API for process support
- Create
  - Create a new process
- Destroy
  - Terminate a process (ctrl-c)
- Wait
  - Wait for a process to complete/stop
- Miscellaneous Control
  - Suspend process (ctrl-z)
  - Resume process (fg, bg)
- Status
  - Obtain process statistics: (top)

PROCESS API: CREATE

1. Load program code (and static data) into memory
   - Program executable code (binary): loaded from disk
   - Static data: also loaded/created in address space
   - **Eager loading**: Load entire program before running
   - **Lazy loading**: Only load what is immediately needed
     - Modern OSes: Supports paging & swapping
2. Run-time stack creation
   - Stack: local variables, function params, return address(es)

PROCESS API: CREATE

3. **Create program's heap memory**
   - For dynamically allocated data
4. **Other initialization**
   - I/O Setup
     - Each process has three open file descriptors: Standard Input, Standard Output, Standard Error
5. **Start program running at the entry point: `main()`**
   - OS transfers CPU control to the new process

March 28, 2024	TCSS422: Operating Systems [Spring 2024] School of Engineering and Technology, University of Washington - Tacoma	L2.57

57

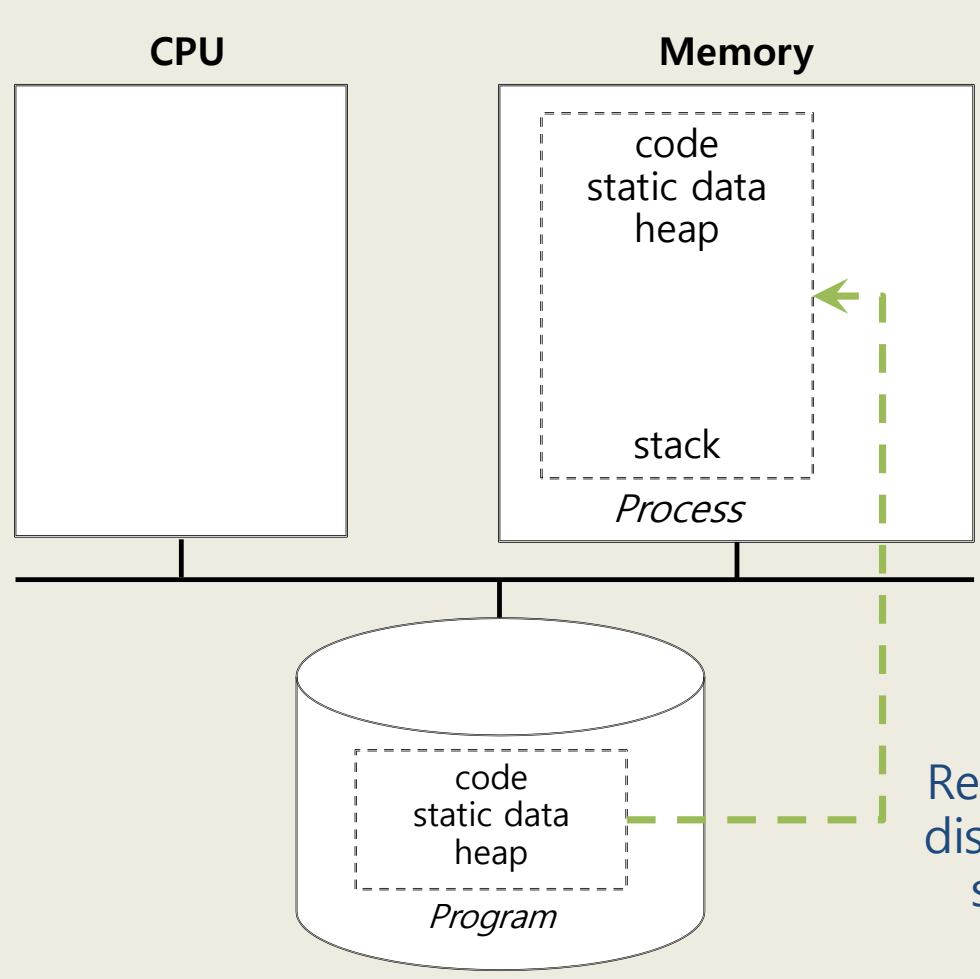

Loading:
Reads program from disk into the address space of process

March 28, 2024	TCSS422: Operating Systems [Spring 2024] School of Engineering and Technology, University of Washington - Tacoma	L2.58

58

OBJECTIVES – 3/28

- Questions from 3/26
- C Review Survey - available thru 4/5
- Student Background Survey
- Virtual Machine Survey
- Chapter 2: Operating Systems – Three Easy Pieces
  - Concepts of virtualization/abstraction
  - Three Easy Pieces: CPU, Memory, I/O
  - Concurrency
  - Operating system design goals
- Chapter 4: Processes
  - **Process states, context switches**
  - Kernel data structures for processes and threads

59

PROCESS STATES

- **RUNNING**
  - Currently executing instructions
- **READY**
  - Process is ready to run, but has been preempted
  - CPU is presently allocated for other tasks
- **BLOCKED**
  - Process is **not** ready to run. It is waiting for another event to complete:
    - Process has already been initialized and run for awhile
    - Is now waiting on I/O from disk(s) or other devices

60

PROCESS STATE TRANSITIONS

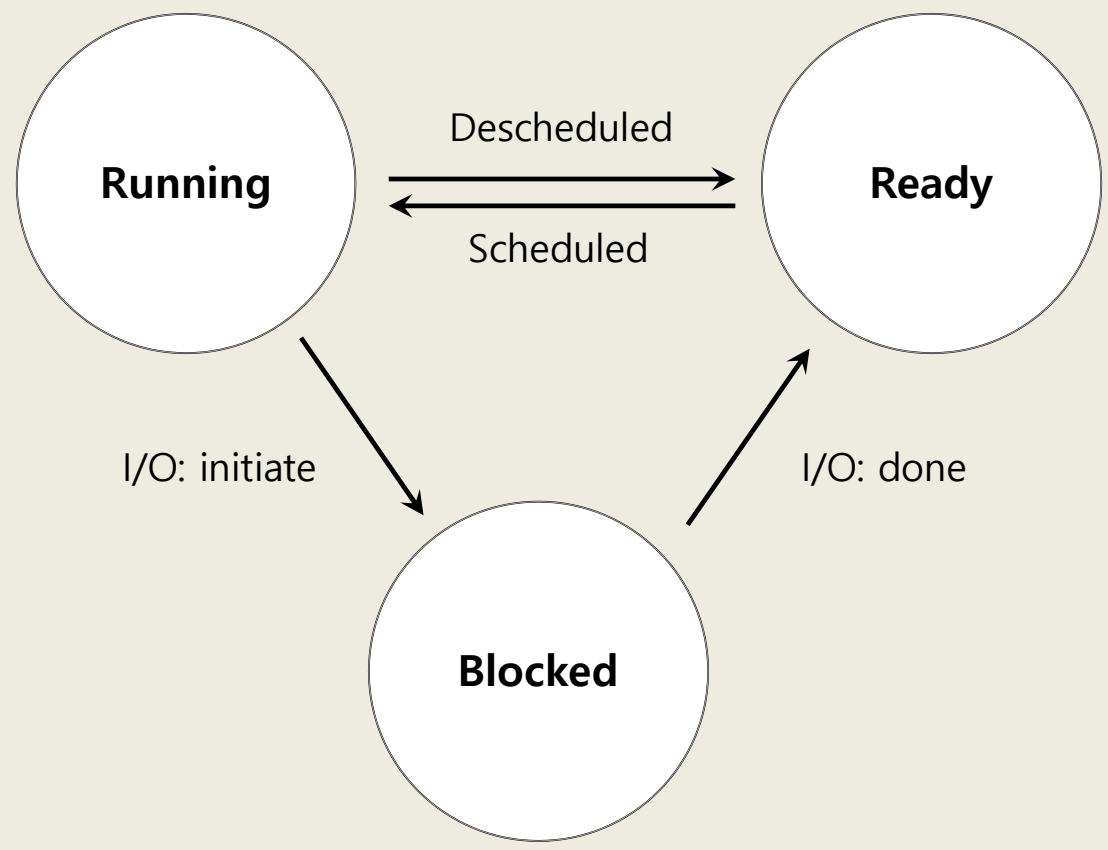

61

OBSERVING PROCESS META-DATA

- Can inspect the number of **CONTEXT SWITCHES** made by a process
- Let’s run mem.c (from chapter 2)
- cat /proc/{process-id}/status

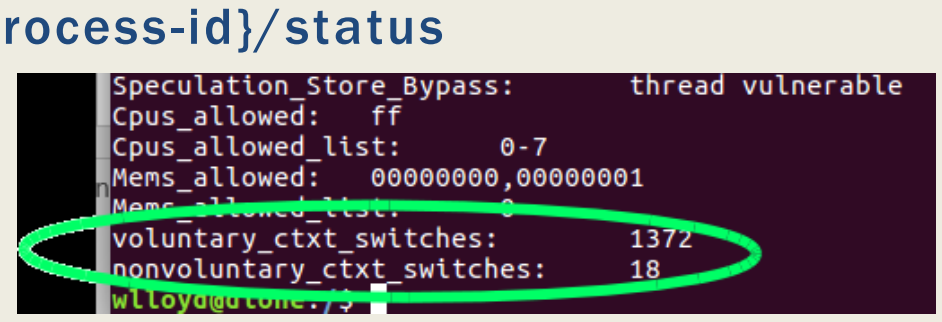

- proc “status” is a virtual file generated by Linux
- Provides a report with process related meta-data
- **What appears to happen to the number of context switches the longer a process runs? (mem.c)**

62

CONTEXT SWITCH

- ***How long does a context switch take?***
- 10,000 to 50,000 ns (.01 to .05 ms)
- 2,000 context switches is near 100ms

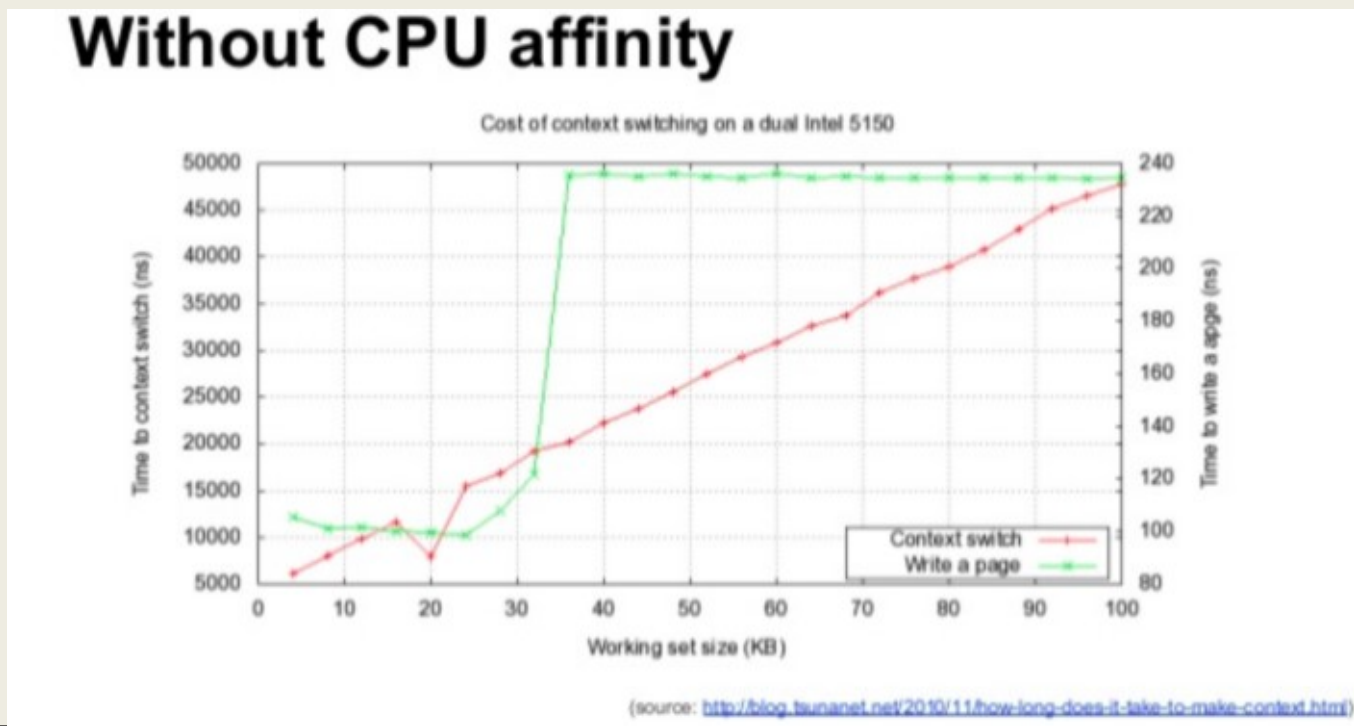

April 2, 2020	TCSS422: Operating Systems [Spring 2020] School of Engineering and Technology, University of Washington - Tacoma	L2.63

63

CONTEXT SWITCH

- ***How long does a context switch take?***
- 10,000 to 50,000 ns (.01 to .05 ms)
- 2,000 context switches is near 100ms
- Mileage can vary depending on system conditions, etc.
- See blog: https://blog.tsunanet.net/2010/11/how-long-does-it-take-to-make-context.html

April 2, 2020	TCSS422: Operating Systems [Spring 2020] School of Engineering and Technology, University of Washington - Tacoma	L2.64

64

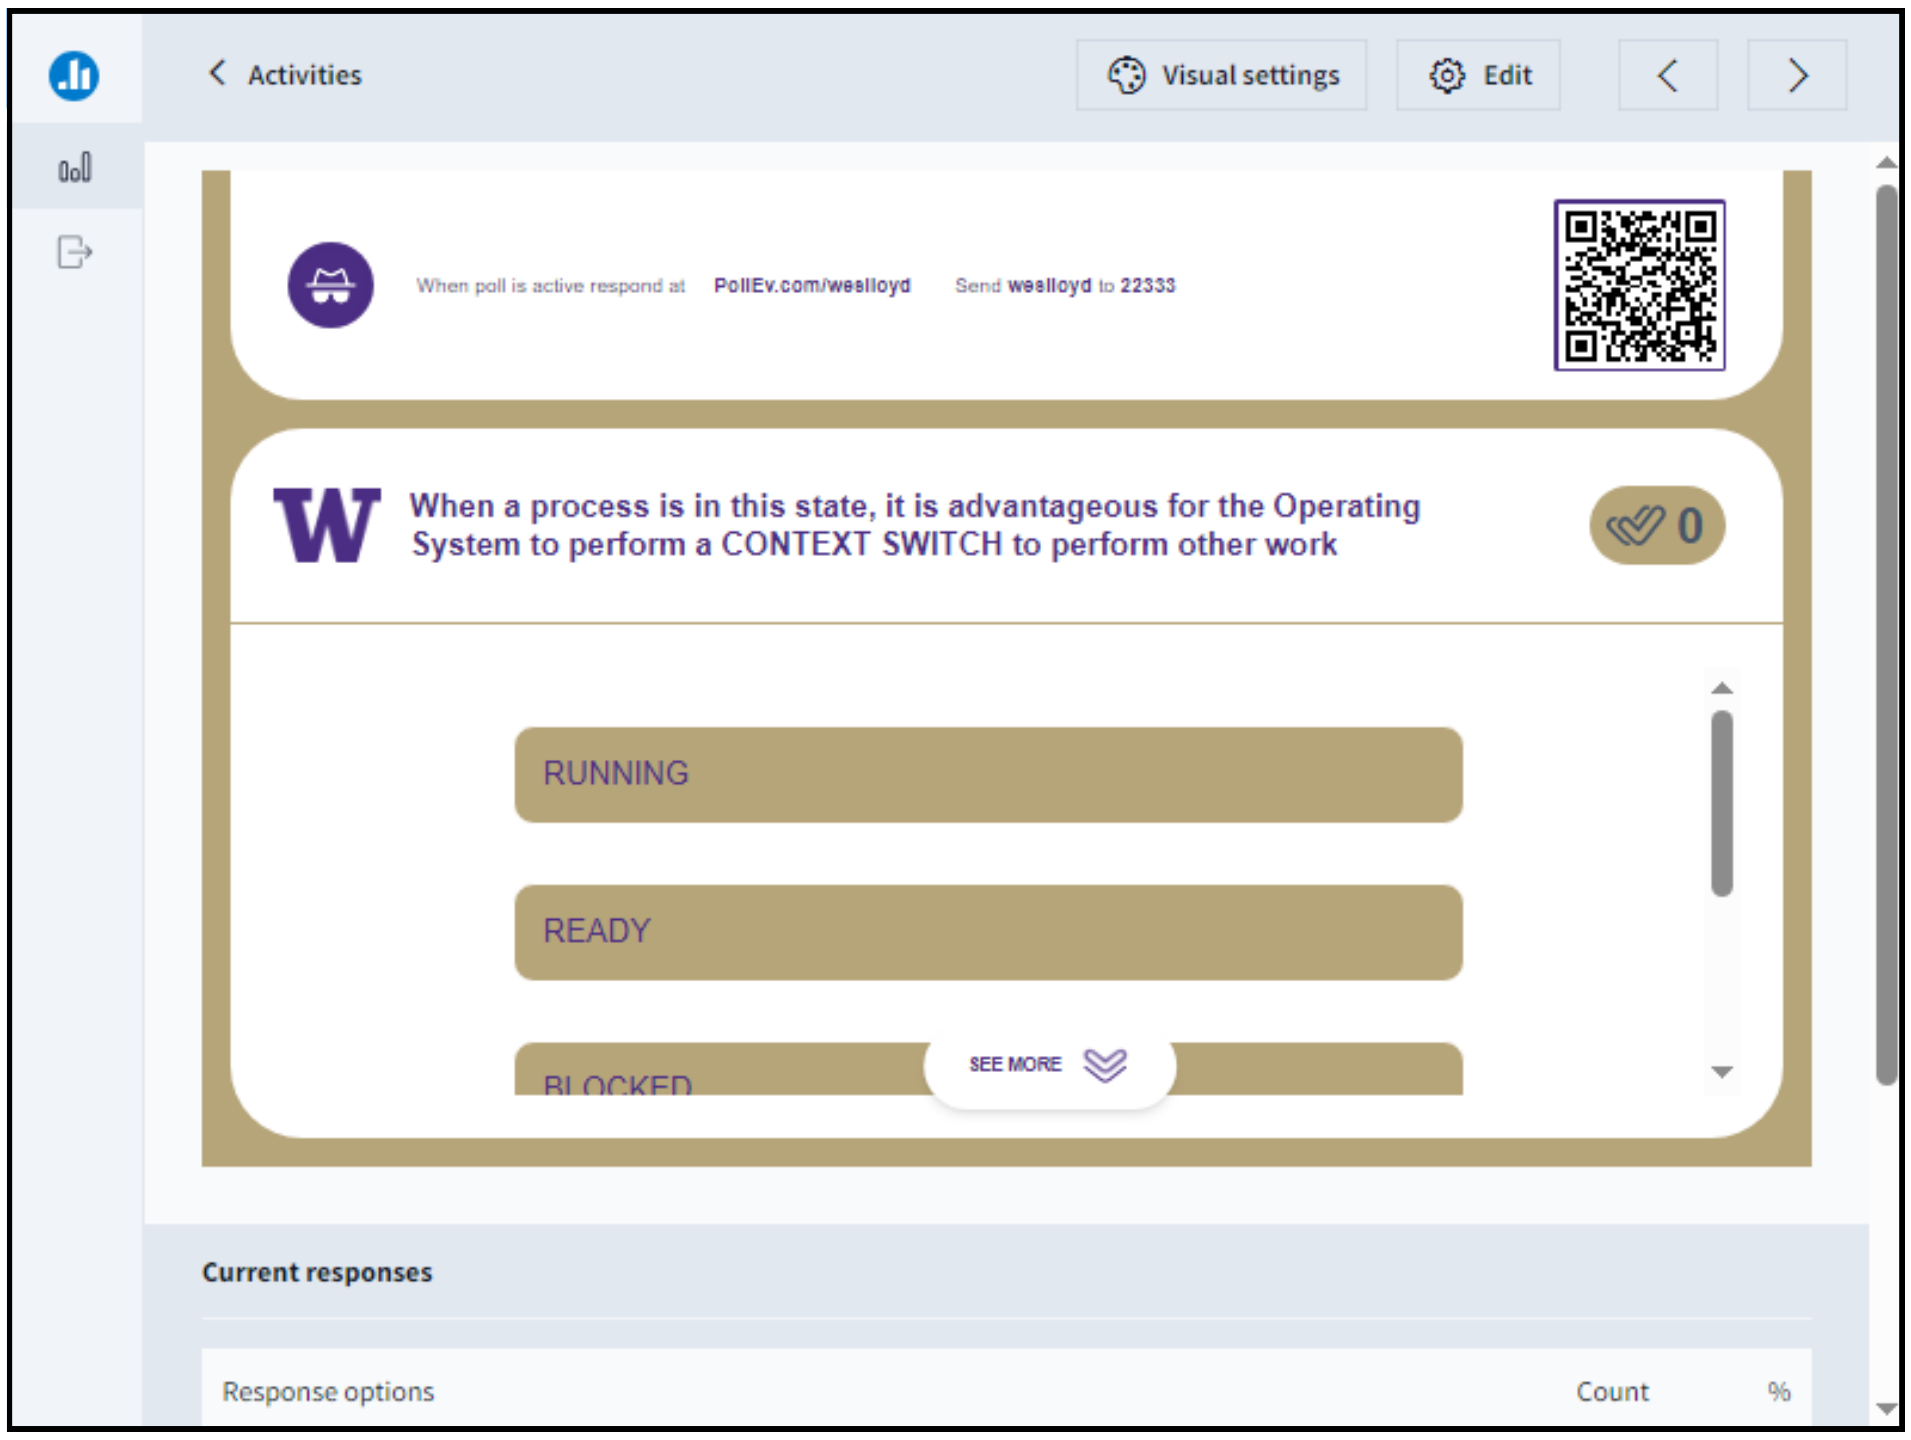

65

QUESTION: WHEN TO CONTEXT SWITCH

- When a process is in this state, it is advantageous for the Operating System to perform a CONTEXT SWITCH to perform other work:

- (a) RUNNING
- (b) READY
- (c) BLOCKED
- (d) All of the above
- (e) None of the above

March 28, 2024	TCSS422: Operating Systems [Spring 2024] School of Engineering and Technology, University of Washington - Tacoma	L2.66

66

OBJECTIVES – 3/28

- Questions from 3/26
- C Review Survey - available thru 4/5
- Student Background Survey
- Virtual Machine Survey
- Chapter 2: Operating Systems – Three Easy Pieces
  - Concepts of virtualization/abstraction
  - Three Easy Pieces: CPU, Memory, I/O
  - Concurrency
  - Operating system design goals
- Chapter 4: Processes
  - Process states, context switches
  - **Kernel data structures for processes and threads**

March 28, 2024	TCSS422: Operating Systems [Spring 2024] School of Engineering and Technology, University of Washington - Tacoma	L2.67

67

PROCESS DATA STRUCTURES

- OS provides data structures to track process information
  - Process list
    - Process Data
    - State of process: Ready, Blocked, Running
  - Register context
- PCB (Process Control Block)
  - A C-structure that contains information about each process

March 28, 2024	TCSS422: Operating Systems [Spring 2024] School of Engineering and Technology, University of Washington - Tacoma	L2.68

68

XV6 KERNEL DATA STRUCTURES

- xv6: pedagogical implementation of Linux
- Simplified structures shown in book

```
// the registers xv6 will save and restore
// to stop and subsequently restart a process
struct context {
    int eip;   // Index pointer register
    int esp;   // Stack pointer register
    int ebx;   // Called the base register
    int ecx;   // Called the counter register
    int edx;   // Called the data register
    int esi;   // Source index register
    int edi;   // Destination index register
    int ebp;   // Stack base pointer register
};

// the different states a process can be in
enum proc_state { UNUSED, EMBRYO, SLEEPING,
                  RUNNABLE, RUNNING, ZOMBIE };
```


69

XV6 KERNEL DATA STRUCTURES - 2

```
// the information xv6 tracks about each process
// including its register context and state
struct proc {
    char *mem;                  // Start of process memory
    uint sz;                    // Size of process memory
    char *kstack;               // Bottom of kernel stack
                                // for this process
    enum proc_state state;      // Process state
    int pid;                    // Process ID
    struct proc *parent;        // Parent process
    void *chan;                 // If non-zero, sleeping on chan
    int killed;                 // If non-zero, have been killed
    struct file *ofile[NOFILE]; // Open files
    struct inode *cwd;          // Current directory
    struct context context;     // Switch here to run process
    struct trapframe *tf;       // Trap frame for the
                                // current interrupt
};
```


70

LINUX: STRUCTURES

- `struct task_struct`, equivalent to **struct proc**
  - The Linux process data structure
  - Kernel data type (i.e. record) that describes individual Linux processes
  - Structure is VERY LARGE: **10,000+ bytes**
  - Defined in:
    /usr/src/linux-headers-{kernel version}/include/linux/sched.h
    - Ubuntu 20.04 w/ kernel version 5.11, **LOC: 657 – 1394**
    - Ubuntu 20.04 w/ kernel version 4.4, **LOC: 1391 – 1852**

STRUCT TASK_STRUCT PROCESS CONTROL BLOCK

- Process Control Block (PCB)
- Key data regarding a process

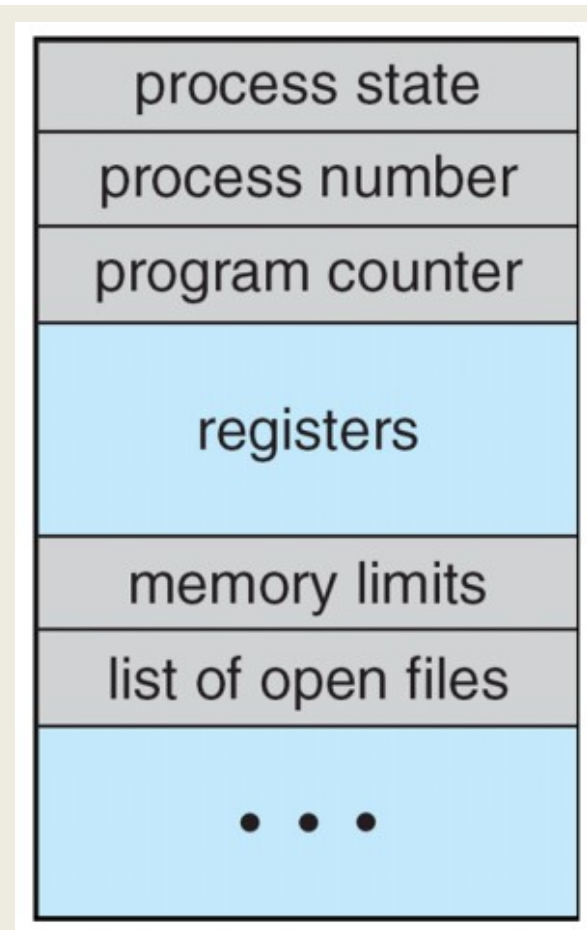

STRUCT TASK_STRUCT

- Key elements (e.g. PCB) in Linux are captured in struct task_struct: (LOC from Linux kernel v 5.11)
- **Process ID**
- `pid_t pid;` LOC #857
- **Process State**
- `/* -1 unrunnable, 0 runnable, >0 stopped: */`
- `volatile long state;` LOC #666
- **Process time slice**
  how long the process will run before context switching
- Struct sched_rt_entity used in task_struct contains timeslice:
  - `struct sched_rt_entity rt;` LOC #710
  - `unsigned int time_slice;` LOC #503

March 28, 2024 | TCSS422: Operating Systems [Spring 2024] School of Engineering and Technology, University of Washington - Tacoma | L2.73

73

STRUCT TASK_STRUCT - 2

- **Address space of the process:**
- "mm" is short for "memory map"
- `struct mm_struct *mm;` LOC #779

- **Parent process**, that launched this one
- `struct task_struct __rcu *parent;` LOC #874

- **Child processes** (as a list)
- `struct list_head children;` LOC #879

- **Open files**
- `struct files_struct *files;` LOC #981

March 28, 2024 | TCSS422: Operating Systems [Spring 2024] School of Engineering and Technology, University of Washington - Tacoma | L2.74

74

LINUX STRUCTURES - 2

- List of Linux data structures:
  http://www.tldp.org/LDP/tlk/ds/ds.html
- Description of process data structures:
  https://learning.oreilly.com/library/view/linux-kernel-development/9780768696974/cover.html
  3rd edition is online (dated from 2010):
  See chapter 3 on Process Management

  Safari online – accessible using UW ID SSO login
  Linux Kernel Development, 3rd edition
  Robert Love
  Addison-Wesley

March 28, 2024 | TCSS422: Operating Systems [Spring 2024] School of Engineering and Technology, University of Washington - Tacoma | L2.75

75

QUESTIONS

76