

# TCSS 422: OPERATING SYSTEMS


## Intro to Concurrency, Linux Thread API, Locks, Lock-based data structures

Wes J. Lloyd  
School of Engineering and Technology  
University of Washington - Tacoma

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington

Tacoma



1

# OBJECTIVES – 4/25

▪ Questions from 4/20

- C Tutorial - Pointers, Strings, Exec in C - Due Fri Apr 28
- Assignment 1 - Due Tue May 9
- Quiz 1 (Due Thur Apr 27) – Quiz 2 (Due Tue May 2)
- Chapter 26: Concurrency: An Introduction
  - Race condition
  - Critical section
- Chapter 27: Linux Thread API
  - pthread\_create/\_join
  - pthread\_mutex\_lock/\_unlock/\_trylock/\_timelock
  - pthread\_cond\_wait/\_signal/\_broadcast
- Chapter 28: Locks
  - Introduction, Lock Granularity
  - Spin Locks, Test and Set, Compare and Swap
- Chapter 29: Lock Based Data Structures
  - Sloppy Counter
  - Concurrent Structures: Linked List, Queue, Hash Table

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.2

2

ONLINE DAILY FEEDBACK SURVEY

■ Daily Feedback Quiz in Canvas – Available After Each Class

■ Extra credit available for completing surveys **ON TIME**

■ Tuesday surveys: due by ~ Wed @ 11:59p

■ Thursday surveys: due ~ Mon @ 11:59p

TCSS 422 A > Assignments

Spring 2021

Search for Assignment

Home

Announcements

Zoom

Syllabus

Assignments

Discussions

Upcoming Assignments

TCSS 422 - Online Daily Feedback Survey - 4/1

Available until Apr 5 at 11:59pm | Due Apr 5 at 10pm | -/1 pts

April 25, 2023

TCSS422: Computer Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.3

3

TCSS 422 - Online Daily Feedback Survey - 4/1

Quiz Instructions

Question 1

0.5 pts

On a scale of 1 to 10, please classify your perspective on material covered in today's class:

12345678910

Mostly Review To MeEqual New and ReviewMostly New to Me

Question 2

0.5 pts

Please rate the pace of today's class:

12345678910

SlowJust RightFast

April 25, 2023

TCSS422: Computer Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.4

4

Slides by Wes J. Lloyd

L9.2

MATERIAL / PACE

- Please classify your perspective on material covered in today’s class (45 respondents):
  - 1-mostly review, 5-equal new/review, 10-mostly new
  - **Average – 7.44** (↓ - previous 7.58)
  
- Please rate the pace of today’s class:
  - 1-slow, 5-just right, 10-fast
  - **Average – 5.84** (↓ - previous 6.14)

April 25, 2023

TCSS422: Computer Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.5

5

FEEDBACK FROM 4/20

- *For the CFS, what is the main reason we need to use it?*
- Prior to the Linux Completely Fair Scheduler (CFS), Linux used the Big O(1) scheduler
- To read more about the specific problems CFS tries to solve with the O(1) scheduler, see the article:
  - <https://dl.acm.org/doi/fullHtml/10.5555/1594371.1594375>
  
- *And can instead of using a Red-Black tree, is it possible to use another type of tree?*
- Red-Black tree is a type of self balancing binary search tree
- Balanced binary search trees are much more efficient at search than unbalanced binary search trees
- Another tree may not be as efficient
- See article: <https://brilliant.org/wiki/red-black-tree/>

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.6

6

## FEEDBACK - 2

- How does sched\_latency\_ns affect the behavior of CFS?
- See slides 8.28 & 8.29
- Sched\_latency\_ns is the total cycle time for iterating through the set of processes in a runqueue
- Default is 24,000,000 ns (24 ms)  
when the number-of-processes in a runqueue < 8
- Otherwise 3ms \* number-of-processes in runqueue
- For example: with 12 processes in runqueue, sched\_latency is 36,000,000 ns (36 ms)
- When less 8 jobs in runqueue, individual jobs get more than sched\_min\_granularity execution time (3ms)
- Longer runtime is better for long running batch jobs
- Long runtime is poor for GUI/IO jobs that run for short bursts

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.7

7

## BONUS SESSION – EXAMPLE SCHEDULER PROBLEMS

- Bonus session:  
Monday May 1 starting at 6:30pm
  - Zoom link to be posted on Canvas
  - Problems and solutions posted on “Schedule” tab of website
- A series of example scheduling problems will be solved:
  - Focus on: FIFO, SJF, STCF, RR, MLFQ

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.8

8

OBJECTIVES – 4/25

- Questions from 4/20
- **C Tutorial - Pointers, Strings, Exec in C - Due Fri Apr 28**
- Assignment 1 - Due Tue May 9
- Quiz 1 (Due Thur Apr 27) – Quiz 2 (Due Tue May 2)
- Chapter 26: Concurrency: An Introduction
  - Race condition
  - Critical section
- Chapter 27: Linux Thread API
  - pthread\_create/\_join
  - pthread\_mutex\_lock/\_unlock/\_trylock/\_timelock
  - pthread\_cond\_wait/\_signal/\_broadcast
- Chapter 28: Locks
  - Introduction, Lock Granularity
  - Spin Locks, Test and Set, Compare and Swap
- Chapter 29: Lock Based Data Structures
  - Sloppy Counter
  - Concurrent Structures: Linked List, Queue, Hash Table

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.9

9

OBJECTIVES – 4/25

- Questions from 4/20
- C Tutorial - Pointers, Strings, Exec in C - Due Fri Apr 28
- **Assignment 1 - Due Tue May 9**
- Quiz 1 (Due Thur Apr 27) – Quiz 2 (Due Tue May 2)
- Chapter 26: Concurrency: An Introduction
  - Race condition
  - Critical section
- Chapter 27: Linux Thread API
  - pthread\_create/\_join
  - pthread\_mutex\_lock/\_unlock/\_trylock/\_timelock
  - pthread\_cond\_wait/\_signal/\_broadcast
- Chapter 28: Locks
  - Introduction, Lock Granularity
  - Spin Locks, Test and Set, Compare and Swap
- Chapter 29: Lock Based Data Structures
  - Sloppy Counter
  - Concurrent Structures: Linked List, Queue, Hash Table

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.10

10

OBJECTIVES – 4/25

- Questions from 4/20
- C Tutorial - Pointers, Strings, Exec in C - Due Fri Apr 28
- Assignment 1 - Due Tue May 9
- Quiz 1 (Due Thur Apr 27) – Quiz 2 (Due Tue May 2)
- Chapter 26: Concurrency: An Introduction
  - Race condition
  - Critical section
- Chapter 27: Linux Thread API
  - pthread\_create/\_join
  - pthread\_mutex\_lock/\_unlock/\_trylock/\_timelock
  - pthread\_cond\_wait/\_signal/\_broadcast
- Chapter 28: Locks
  - Introduction, Lock Granularity
  - Spin Locks, Test and Set, Compare and Swap
- Chapter 29: Lock Based Data Structures
  - Sloppy Counter
  - Concurrent Structures: Linked List, Queue, Hash Table

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.11

11

QUIZ 1

- Active reading on Chapter 9 – Proportional Share Schedulers
- Posted in Canvas
- Due Thursday April 27<sup>th</sup> at 11:59pm
- Link:
- [https://faculty.washington.edu/wlloyd/courses/tcss422/quiz/TCSS422\\_s2023\\_quiz\\_1.pdf](https://faculty.washington.edu/wlloyd/courses/tcss422/quiz/TCSS422_s2023_quiz_1.pdf)

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.12

12

QUIZ 2

- Canvas Quiz – Practice CPU Scheduling Problems
  - Posted in Canvas
  - Unlimited attempts permitted
  - Provides CPU scheduling practice problems
    - FIFO, SJF, STCF, RR, MLFQ (Ch. 7 & 8)
  - Multiple choice and fill-in the blank
  - Quiz automatically scored by Canvas
    - Please report any grading problems
- Due Tuesday May 2<sup>nd</sup> at 11:59pm
- Link:
  - <https://canvas.uw.edu/courses/1642522/assignments/8316759>

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.13

13

OBJECTIVES – 4/25

- Questions from 4/20
- C Tutorial - Pointers, Strings, Exec in C - Due Fri Apr 28
- Assignment 1 - Due Tue May 9
- Quiz 1 (Due Thur Apr 27) – Quiz 2 (Due Tue May 2)
- Chapter 26: Concurrency: An Introduction**
  - Race condition
  - Critical section
- Chapter 27: Linux Thread API
  - pthread\_create/\_join
  - pthread\_mutex\_lock/\_unlock/\_trylock/\_timelock
  - pthread\_cond\_wait/\_signal/\_broadcast
- Chapter 28: Locks
  - Introduction, Lock Granularity
  - Spin Locks, Test and Set, Compare and Swap
- Chapter 29: Lock Based Data Structures
  - Sloppy Counter
  - Concurrent Structures: Linked List, Queue, Hash Table

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.14

14

COUNTER EXAMPLE


- Counter example
  - A + B : ordering
  - Counter: incrementing global variable by two threads
- Is the counter example embarrassingly parallel?*
- What does the parallel counter program require?*

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.15

15

PROCESSES VS. THREADS

- What's the difference between forks and threads?
  - Forks: duplicate a process
  - Think of **CLONING** - There will be two identical processes at the end
  - Threads: no duplication of code/heap, lightweight execution threads

Process

Process State: PC, registers, SP, etc...

Code Segment

Data Segment

Heap

Stack

Process

Process State: PC, registers, SP, etc...

Code Segment

Data Segment

Heap

Stack

code

data

files

registers

stack

thread →

single-threaded process

code

data

files

registers

registers

registers

stack

stack

stack

← thread

multithreaded process

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.16

16

Slides by Wes J. Lloyd

L9.8



OBJECTIVES – 4/25

- Questions from 4/20
- C Tutorial - Pointers, Strings, Exec in C - Due Fri Apr 28
- Assignment 1 - Due Tue May 9
- Quiz 1 (Due Thur Apr 27) – Quiz 2 (Due Tue May 2)
- Chapter 26: Concurrency: An Introduction
  - Race condition**
  - Critical section
- Chapter 27: Linux Thread API
  - pthread\_create/\_join
  - pthread\_mutex\_lock/\_unlock/\_trylock/\_timelock
  - pthread\_cond\_wait/\_signal/\_broadcast
- Chapter 28: Locks
  - Introduction, Lock Granularity
  - Spin Locks, Test and Set, Compare and Swap
- Chapter 29: Lock Based Data Structures
  - Sloppy Counter
  - Concurrent Structures: Linked List, Queue, Hash Table

April 25, 2023

TCCS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.17

17

RACE CONDITION

- What is happening with our counter?
  - When counter=50, consider code: counter = counter + 1
  - If synchronized, counter will = 52

	OS	Thread1	Thread2	(after instruction)		
				PC	%eax	counter
{		before critical section		100	0	50
		mov 0x8049a1c, %eax		105	50	50
		add \$0x1, %eax		108	51	50
	interrupt					
{		save T1's state		100	0	50
		restore T2's state		105	50	50
			mov 0x8049a1c, %eax	105	50	50
			add \$0x1, %eax	108	51	50
			mov %eax, 0x8049a1c	113	51	51
	interrupt					
{		save T2's state		108	51	50
		restore T1's state		113	51	51
			mov %eax, 0x8049a1c			51

April 25, 2023

TCCS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.18

18

# RACE CONDITION

Thread 2 preempts Thread 1 and changes the counter value AFTER Thread 1 has read the value

When Thread 1 resumes, it does not reread the counter value and Thread 1 overwrites value from Thread 2

Thread 1's Increment is lost

restore T1's state

mov %eax, 0x8049a1c

108 51 50

113 51 51

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.19

19

# OBJECTIVES – 4/25

- Questions from 4/20
- C Tutorial - Pointers, Strings, Exec in C - Due Fri Apr 28
- Assignment 1 - Due Tue May 9
- Quiz 1 (Due Thur Apr 27) – Quiz 2 (Due Tue May 2)
- Chapter 26: Concurrency: An Introduction
  - Race condition
  - Critical section
- Chapter 27: Linux Thread API
  - pthread\_create/\_join
  - pthread\_mutex\_lock/\_unlock/\_trylock/\_timelock
  - pthread\_cond\_wait/\_signal/\_broadcast
- Chapter 28: Locks
  - Introduction, Lock Granularity
  - Spin Locks, Test and Set, Compare and Swap
- Chapter 29: Lock Based Data Structures
  - Sloppy Counter
  - Concurrent Structures: Linked List, Queue, Hash Table

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.20

20

## CRITICAL SECTION

- Code that accesses a shared variable must not be **concurrently** executed by more than one thread
- Multiple active threads inside a **critical section** produce a **race condition**.
- **Atomic execution** (*all code executed as a unit*) must be ensured in **critical** sections
  - These sections must be **mutually exclusive**



April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.21

21

## LOCKS

- To demonstrate how critical section(s) can be executed “atomically-as a unit” Chapter 27 & beyond introduce **LOCKS**

```
1 lock_t mutex;  
2 . . .  
3 lock(&mutex);  
4 balance = balance + 1;  
5 unlock(&mutex);
```

Critical section

- Counter example revisited

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.22

22

COUNTER EXAMPLE

- With locks
  - 2 threads count to 16 million
  - ~1.4 seconds
  - COUNT IS CORRECT – no data loss
- Without locks
  - 2 threads count to 16 million
  - ~0.03 seconds
  - COUNT IS INCORRECT - DATA IS LOST
- Correct version is 46.6 x slower
  - Cost is ~16 million Lock & Unlock API calls


April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.23

23

CHAPTER 27 -  
LINUX  
THREAD API



April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.24

24

## OBJECTIVES – 4/25

- Questions from 4/20
- C Tutorial - Pointers, Strings, Exec in C - Due Fri Apr 28
- Assignment 1 - Due Tue May 9
- Quiz 1 (Due Thur Apr 27) – Quiz 2 (Due Tue May 2)
- Chapter 26: Concurrency: An Introduction
  - Race condition
  - Critical section
- Chapter 27: Linux Thread API
  - **pthread\_create/\_join**
  - pthread\_mutex\_lock/\_unlock/\_trylock/\_timelock
  - pthread\_cond\_wait/\_signal/\_broadcast
- Chapter 28: Locks
  - Introduction, Lock Granularity
  - Spin Locks, Test and Set, Compare and Swap
- Chapter 29: Lock Based Data Structures
  - Sloppy Counter
  - Concurrent Structures: Linked List, Queue, Hash Table

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.25

25

## THREAD CREATION

### ▪ pthread\_create

```
#include <pthread.h>

int
pthread_create(    pthread_t*    thread,
                  const pthread_attr_t* attr,
                  void*          (*start_routine)(void*),
                  void*          arg);
```

- thread: thread struct
- attr: stack size, scheduling priority... (*optional*)
- start\_routine: function pointer to thread routine
- arg: argument to pass to thread routine (*optional*)

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.26

26

## PTHREAD\_CREATE – PASS ANY DATA

```
#include <pthread.h>

typedef struct __myarg_t {
    int a;
    int b;
} myarg_t;

void *mythread(void *arg) {
    myarg_t *m = (myarg_t *) arg;
    printf("%d %d\n", m->a, m->b);
    return NULL;
}

int main(int argc, char *argv[]) {
    pthread_t p;
    int rc;

    myarg_t args;
    args.a = 10;
    args.b = 20;
    rc = pthread_create(&p, NULL, mythread, &args);
    ...
}
```

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.27

27

## PASSING A SINGLE VALUE

Using this approach on your Ubuntu VM,  
How large (in bytes) can the primitive data type be?

How large (in bytes) can the primitive data type  
be on a 32-bit operating system?

```
9    int rc, m;
10   pthread_create(&p, NULL, mythread, (void *) 100);
11   pthread_join(p, (void **) &m);
12   printf("returned %d\n", m);
13   return 0;
14 }
```

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.28

28

## WAITING FOR THREADS TO FINISH

```
int pthread_join(pthread_t thread, void **value_ptr);
```

- **thread:** which thread?
- **value\_ptr:** pointer to return value  
type is dynamic / agnostic
- Returned values *\*must\** be on the heap
- Thread stacks destroyed upon thread termination (join)
- Pointers to thread stack memory addresses are invalid
  - May appear as gibberish or lead to crash (seg fault)
- Not all threads join – *What would be Examples ??*

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.29

29

## What will this code do?

```
struct myarg {
    int a;
    int b;
};
```

```
void *worker(void *arg)
```

```
{
    struct myarg *input = (struct myarg *) arg;
    printf("a=%d b=%d\n", input->a, input->b);
    struct myarg output;
    output.a = 1;
    output.b = 2;
    return (void *) &output;
}
```

← Data on thread stack

```
$ ./pthread_struct
```

```
a=10 b=20
```

```
Segmentation fault (core dumped)
```

```
int main (int argc, char * argv[])
```

```
{
    pthread_t p1;
    struct myarg args;
    struct myarg *ret_args;
    args.a = 10;
    args.b = 20;
    pthread_
    pthread_
    printf("
    return 0;
}
```

## How can this code be fixed?

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.30

30

```

struct myarg {
    int a;
    int b;
};

void *worker(void *arg)
{
    struct myarg *input = (struct myarg *) arg;
    printf("a=%d b=%d\n", input->a, input->b);
    input->a = 1;
    input->b = 2;
    return (void *) &input;
}

int main (int argc, char * argv[])
{
    pthread_t p1;
    struct myarg args;
    struct myarg *ret_args;
    args.a = 10;
    args.b = 20;
    pthread_create(&p1, NULL, worker, &args);
    pthread_join(p1, (void *)&ret_args);
    printf("returned %d %d\n", ret_args->a, ret_args->b);
    return 0;
}

```

## How about this code?

```

$ ./pthread_struct
a=10 b=20
returned 1 2

```

April 25, 2023
TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma
L9.31

31

## ADDING CASTS

- Casting
- Suppresses compiler warnings when passing “typed” data where (void) or (void \*) is called for
- Example: uncasted capture in pthread\_join
 

```

pthread_int.c: In function ‘main’:
pthread_int.c:34:20: warning: passing argument 2 of ‘pthread_join’
from incompatible pointer type [-Wincompatible-pointer-types]
    pthread_join(p1, &p1val);

```
- Example: uncasted return
 

```

In file included from pthread_int.c:3:0:
/usr/include/pthread.h:250:12: note: expected ‘void **’ but argument
is of type ‘int **’
    extern int pthread_join (pthread_t __th, void **__thread_return);

```

April 25, 2023
TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma
L9.32

32



ADDING CASTS - 2

■ pthread\_join

```
int * p1val;  
int * p2val;  
pthread_join(p1, (void *)&p1val);  
pthread_join(p2, (void *)&p2val);
```

■ return from thread function

```
int * counterval = malloc(sizeof(int));  
*counterval = counter;  
return (void *) counterval;
```

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.33

33

WE WILL RETURN AT  
4:55PM

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.34



34

## OBJECTIVES – 4/25

- Questions from 4/20
- C Tutorial - Pointers, Strings, Exec in C - Due Fri Apr 28
- Assignment 1 - Due Tue May 9
- Quiz 1 (Due Thur Apr 27) – Quiz 2 (Due Tue May 2)
- Chapter 26: Concurrency: An Introduction
  - Race condition
  - Critical section
- Chapter 27: Linux Thread API
  - `pthread_create/_join`
  - **`pthread_mutex_lock/_unlock/_trylock/_timelock`**
  - `pthread_cond_wait/_signal/_broadcast`
- Chapter 28: Locks
  - Introduction, Lock Granularity
  - Spin Locks, Test and Set, Compare and Swap
- Chapter 29: Lock Based Data Structures
  - Sloppy Counter
  - Concurrent Structures: Linked List, Queue, Hash Table

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.35

35

## LOCKS

- `pthread_mutex_t` data type
- `/usr/include/bits/pthread_types.h`

```
// Global Address Space
static volatile int counter = 0;
pthread_mutex_t lock;

void *worker(void *arg)
{
    int i;
    for (i=0; i<100000000; i++) {
        int rc = pthread_mutex_lock(&lock);
        assert(rc==0);
        counter = counter + 1;
        pthread_mutex_unlock(&lock);
    }
    return NULL;
}
```

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.36

36


## LOCKS - 2

- Ensure critical sections are executed atomically-as a unit
  - Provides implementation of “*Mutual Exclusion*”

- API

```
int pthread_mutex_lock(pthread_mutex_t *mutex);  
int pthread_mutex_unlock(pthread_mutex_t *mutex);
```

- Example w/o initialization & error checking



```
pthread_mutex_t lock;  
pthread_mutex_lock(&lock);  
x = x + 1; // or whatever your critical section is  
pthread_mutex_unlock(&lock);
```

- Blocks forever until lock can be obtained
- Enters critical section once lock is obtained
- Releases lock

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.37

37

## LOCK INITIALIZATION

- Assigning the constant

```
pthread_mutex_t lock = PTHREAD_MUTEX_INITIALIZER;
```

- API call:

```
int rc = pthread_mutex_init(&lock, NULL);  
assert(rc == 0); // always check success!
```

- Initializes mutex with attributes specified by 2<sup>nd</sup> argument
- If NULL, then default attributes are used
- Upon initialization, the mutex is initialized and unlocked

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.38

38

## LOCKS - 3

### ■ Error checking wrapper

```
// Use this to keep your code clean but check for failures
// Only use if exiting program is OK upon failure
void Pthread_mutex_lock(pthread_mutex_t *mutex) {
    int rc = pthread_mutex_lock(mutex);
    assert(rc == 0);
}
```

### ■ What if lock can't be obtained?

```
int pthread_mutex_trylock(pthread_mutex_t *mutex);
int pthread_mutex_timelock(pthread_mutex_t *mutex,
                          struct timespec *abs_timeout);
```

- trylock – returns immediately (fails) if lock is unavailable
- timelock – tries to obtain a lock for a specified duration

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.39

39

When poll is active, respond at [pollev.com/wesleylloyd641](https://pollev.com/wesleylloyd641)

Text **WESLEYLLOYD641** to **22333** once to join

**W** Which **NON-BLOCKING** API call can be used to obtain a lock without **BLOCKING** the calling thread?

pthread\_mutex\_lock()  
pthread\_mutex\_unlock()  
pthread\_join()  
pthread\_mutex\_trylock()  
None of the above

Start the presentation to see live content. For screen share software, share the entire screen. Get help at [pollev.com/app](https://pollev.com/app)

40

When poll is active, respond at [pollev.com/wesleylloyd641](https://pollev.com/wesleylloyd641)  
Text **WESLEYLLOYD641** to **22333** once to join

W

Which API call **BLOCKS** temporarily for a specified amount of time while trying to obtain a lock before giving up?

Start the presentation to see live content. For screen share software, share the entire screen. Get help at [pollev.com/app](https://pollev.com/app)

41

OBJECTIVES – 4/25

- Questions from 4/20
- C Tutorial - Pointers, Strings, Exec in C - Due Fri Apr 28
- Assignment 1 - Due Tue May 9
- Quiz 1 (Due Thur Apr 27) – Quiz 2 (Due Tue May 2)
- Chapter 26: Concurrency: An Introduction
  - Race condition
  - Critical section
- Chapter 27: Linux Thread API
  - pthread\_create/\_join
  - pthread\_mutex\_lock/\_unlock/\_trylock/\_timelock
  - pthread\_cond\_wait/\_signal/\_broadcast
- Chapter 28: Locks
  - Introduction, Lock Granularity
  - Spin Locks, Test and Set, Compare and Swap
- Chapter 29: Lock Based Data Structures
  - Sloppy Counter
  - Concurrent Structures: Linked List, Queue, Hash Table

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.42

42

## CONDITIONS AND SIGNALS

- Condition variables support “signaling” between threads

```
int pthread_cond_wait(pthread_cond_t *cond,  
                      pthread_mutex_t *mutex);  
int pthread_cond_signal(pthread_cond_t *cond);
```



- `pthread_cond_t` datatype
- `pthread_cond_wait()`
  - Puts thread to “sleep” (waits) (THREAD is BLOCKED)
  - Threads added to **>FIFO queue<**, lock is released
  - Waits (*listens*) for a “signal” (NON-BUSY WAITING, no polling)
  - When signal occurs, interrupt fires, wakes up first thread, (THREAD is RUNNING), lock is provided to thread

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.43

43

## CONDITIONS AND SIGNALS - 2

```
int pthread_cond_signal(pthread_cond_t * cond);  
int pthread_cond_broadcast(pthread_cond_t * cond);
```

- `pthread_cond_signal()`
  - Called to send a “signal” to wake-up first thread in **FIFO “wait” queue**
  - The goal is to unblock a thread to respond to the signal
- `pthread_cond_broadcast()`
  - Unblocks **all** threads in **FIFO “wait” queue**, currently blocked on the specified condition variable
  - Broadcast is used when all threads should wake-up for the signal
- Which thread is unblocked first?
  - Determined by OS scheduler (based on priority)
  - Thread(s) awoken based on placement order in **FIFO wait queue**
  - When awoken threads acquire lock as in `pthread_mutex_lock()`

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.44

44

## CONDITIONS AND SIGNALS - 3

### Wait example:

```
pthread_mutex_t lock = PTHREAD_MUTEX_INITIALIZER;
pthread_cond_t cond = PTHREAD_COND_INITIALIZER;

pthread_mutex_lock(&lock);
while (initialized == 0)
    pthread_cond_wait(&cond, &lock);
// Perform work that requires lock
a = a + b;
pthread_mutex_unlock(&lock);
```

- wait puts thread to sleep, releases lock
- when awoken, lock reacquired (but then released by this code)
- When initialized, another thread signals

```
pthread_mutex_lock(&lock);
initialized = 1;
pthread_cond_signal(&cond);
pthread_mutex_unlock(&lock);
```

State variable set,  
Enables other thread(s)  
to proceed above.

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.45

45

## CONDITION AND SIGNALS - 4

```
pthread_mutex_t lock = PTHREAD_MUTEX_INITIALIZER;
pthread_cond_t cond = PTHREAD_COND_INITIALIZER;

pthread_mutex_lock(&lock);
while (initialized == 0)
    pthread_cond_wait(&cond, &lock);
// Perform work that requires lock
a = a + b;
pthread_mutex_unlock(&lock);
```

- Why do we wait inside a while loop?
- The while ensures upon awakening the condition is rechecked
  - A signal is raised, but the pre-conditions required to proceed may have not been met. **\*\*MUST CHECK STATE VARIABLE\*\***
  - Without checking the state variable the thread may proceed to execute when it should not. (e.g. too early)

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.46

46

## PTHREADS LIBRARY

- **Compilation:**  
gcc requires special option to require programs with pthreads:
  - `gcc -pthread pthread.c -o pthread`
  - Explicitly links library with compiler flag
  - **RECOMMEND:** using makefile to provide compiler arguments
- **List of pthread manpages**
  - `man -k pthread`

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.47

47

## SAMPLE MAKEFILE

```
CC=gcc
CFLAGS=-pthread -I. -Wall

binaries=pthread pthread_int pthread_lock_cond pthread_struct

all: $(binaries)

pthread_mult: pthread.c pthread_int.c
    $(CC) $(CFLAGS) $^ -o $@

clean:
    $(RM) -f $(binaries) *.o
```

- **Example builds multiple single file programs**
  - All target
- **pthread\_mult**
  - Example if multiple source files should produce a single executable
- **clean target**

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.48

48



When poll is active, respond at [pollev.com/wesleylloyd641](https://pollev.com/wesleylloyd641)

Text **WESLEYLLOYD641** to **22333** once to join

W

## What key feature differentiates condition variables from mutex\_locks in C ?

Condition variables provide only NON-BLOCKING API calls.

Locks can not be used without condition variables.

Condition variables introduce a FIFO queue enabling control of the order that threads will receive the lock which provides fairness.


Condition variables must first be initialized to a non-NULL value before being used in the program.

None of the above

Start the presentation to see live content. For screen share software, share the entire screen. Get help at [pollev.com/app](https://pollev.com/app)

49

# CHAPTER 28 – LOCKS



April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.50

50

## OBJECTIVES – 4/25

- Questions from 4/20
- C Tutorial - Pointers, Strings, Exec in C - Due Fri Apr 28
- Assignment 1 - Due Tue May 9
- Quiz 1 (Due Thur Apr 27) – Quiz 2 (Due Tue May 2)
- Chapter 26: Concurrency: An Introduction
  - Race condition
  - Critical section
- Chapter 27: Linux Thread API
  - `pthread_create/_join`
  - `pthread_mutex_lock/_unlock/_trylock/_timelock`
  - `pthread_cond_wait/_signal/_broadcast`
- Chapter 28: Locks
  - **Introduction** Lock Granularity
  - Spin Locks, Test and Set, Compare and Swap
- Chapter 29: Lock Based Data Structures
  - Sloppy Counter
  - Concurrent Structures: Linked List, Queue, Hash Table

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.51

51

## LOCKS



- Ensure critical section(s) are executed atomically-as a *unit*
  - Only one thread is allowed to execute a critical section at any given time
  - Ensures the code snippets are “mutually exclusive”

- Protect a global counter:

```
balance = balance + 1;
```

- A “critical section”:

```
1 lock_t mutex; // some globally-allocated lock 'mutex'
2 ...
3 lock(&mutex);
4 balance = balance + 1;
5 unlock(&mutex);
```

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.52

52

## LOCKS - 2

- Lock variables are called “MUTEX”
  - Short for mutual exclusion (that’s what they guarantee)
- Lock variables store the state of the lock
- States
  - **Locked** (acquired or held)
  - **Unlocked** (available or free)
- Only 1 thread can hold a lock

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.53

53

## LOCKS - 3

- `pthread_mutex_lock(&lock)`
  - Try to acquire lock
  - If lock is free, calling thread will acquire the lock
  - Thread with lock enters critical section
    - Thread “owns” the lock
- No other thread can acquire the lock before the owner releases it.

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.54

54

OBJECTIVES – 4/25

- Questions from 4/20
- C Tutorial - Pointers, Strings, Exec in C - Due Fri Apr 28
- Assignment 1 - Due Tue May 9
- Quiz 1 (Due Thur Apr 27) – Quiz 2 (Due Tue May 2)
- Chapter 26: Concurrency: An Introduction
  - Race condition
  - Critical section
- Chapter 27: Linux Thread API
  - pthread\_create/\_join
  - pthread\_mutex\_lock/\_unlock/\_trylock/\_timelock
  - pthread\_cond\_wait/\_signal/\_broadcast
- Chapter 28: Locks
  - Introduction, **Lock Granularity**
  - Spin Locks, Test and Set, Compare and Swap
- Chapter 29: Lock Based Data Structures
  - Sloppy Counter
  - Concurrent Structures: Linked List, Queue, Hash Table

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.55

55

LOCKS - 4

- Program can have many mutex (lock) variables to “serialize” many critical sections
- Locks are also used to protect data structures
  - Prevent multiple threads from changing the same data simultaneously
  - Programmer can make sections of code “granular”
    - ***Fine grained*** – means just one grain of sand at a time through an hour glass
  - Similar to relational database transactions
    - DB transactions prevent multiple users from modifying a table, row, field

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma


L9.56

56

FINE GRAINED?

■ *Is this code a good example of “fine grained parallelism”?*

```
pthread_mutex_lock(&lock);  
a = b++;  
b = a * c;  
*d = a + b +c;  
FILE * fp = fopen ("file.txt", "r");  
fscanf(fp, "%s %s %s %d", str1, str2, str3, &e);  
ListNode *node = mylist->head;  
Int i=0  
while (node) {  
    node->title = str1;  
    node->subheading = str2;  
    node->desc = str3;  
    node->end = *e;  
    node = node->next;  
    i++  
}  
e = e - i;  
pthread_mutex_unlock(&lock);
```



April 25, 2023


TCCS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.57

57

FINE GRAINED PARALLELISM

```
pthread_mutex_lock(&lock_a);  
pthread_mutex_lock(&lock_b);  
a = b++;  
pthread_mutex_unlock(&lock_b);  
pthread_mutex_unlock(&lock_a);  
  
pthread_mutex_lock(&lock_b);  
b = a * c;  
pthread_mutex_unlock(&lock_b);  
  
pthread_mutex_lock(&lock_d);  
*d = a + b +c;  
pthread_mutex_unlock(&lock_d);  
  
FILE * fp = fopen ("file.txt", "r");  
pthread_mutex_lock(&lock_e);  
fscanf(fp, "%s %s %s %d", str1, str2, str3, &e);  
pthread_mutex_unlock(&lock_e);  
  
ListNode *node = mylist->head;  
int i=0 . . .
```




April 25, 2023


TCCS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.58

58

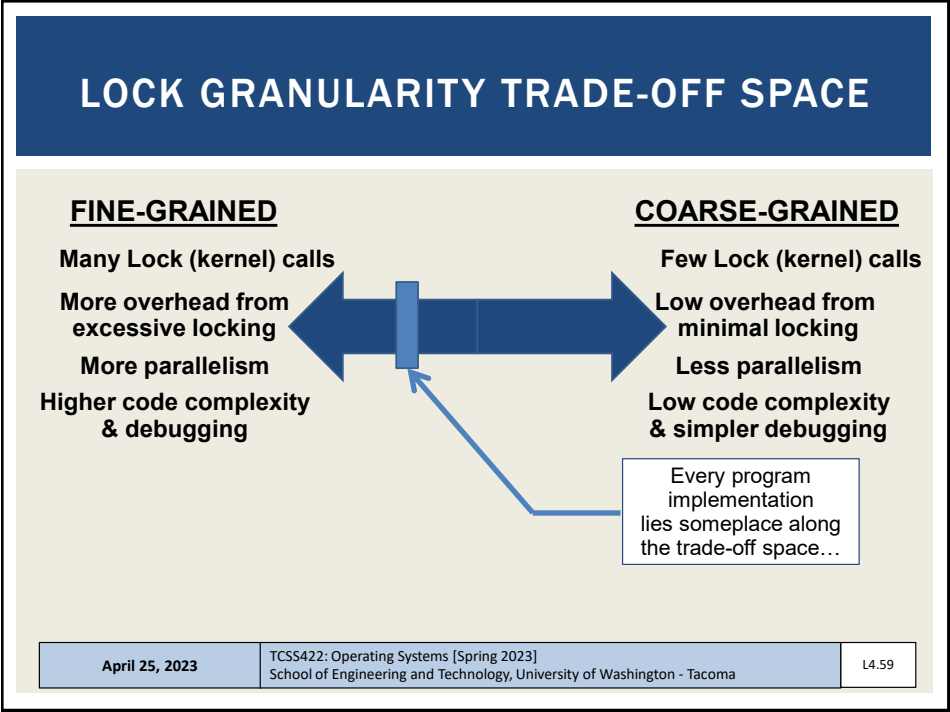

59

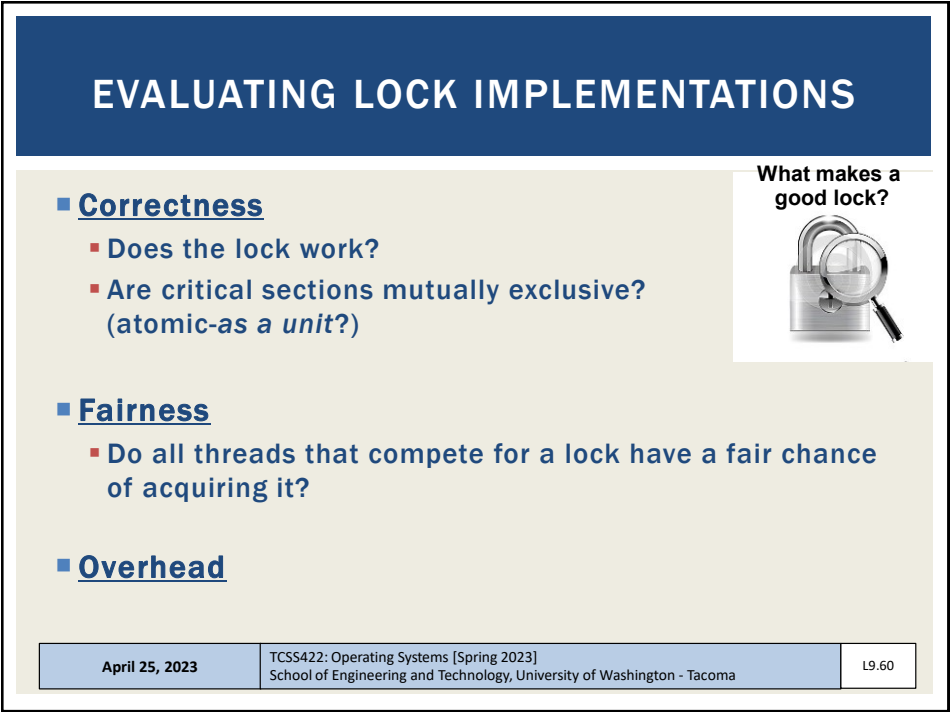

60

## BUILDING LOCKS

- Locks require hardware support
  - To minimize overhead, ensure fairness and correctness
  - Special “atomic-as a *unit*” instructions to support lock implementation
  - Atomic-as a *unit* exchange instruction
    - XCHG
  - Compare and exchange instruction
    - CMPXCHG
    - CMPXCHG8B
    - CMPXCHG16B

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.61

61

## HISTORICAL IMPLEMENTATION

- To implement mutual exclusion
    - Disable interrupts upon entering critical sections
- ```
1  void lock() {
2      DisableInterrupts();
3  }
4  void unlock() {
5      EnableInterrupts();
6  }
```
- Any thread could disable system-wide interrupt
    - What if lock is never released?
  - On a multiprocessor processor each CPU has its own interrupts
    - Do we disable interrupts for all cores simultaneously?
  - While interrupts are disabled, they could be lost
    - If not queued...

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.62

62

## OBJECTIVES – 4/25

- Questions from 4/20
- C Tutorial - Pointers, Strings, Exec in C - Due Fri Apr 28
- Assignment 1 - Due Tue May 9
- Quiz 1 (Due Thur Apr 27) – Quiz 2 (Due Tue May 2)
- Chapter 26: Concurrency: An Introduction
  - Race condition
  - Critical section
- Chapter 27: Linux Thread API
  - pthread\_create/\_join
  - pthread\_mutex\_lock/\_unlock/\_trylock/\_timelock
  - pthread\_cond\_wait/\_signal/\_broadcast
- Chapter 28: Locks
  - Introduction, Lock Granularity
  - **Spin Locks**, Test and Set, Compare and Swap
- Chapter 29: Lock Based Data Structures
  - Sloppy Counter
  - Concurrent Structures: Linked List, Queue, Hash Table

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.63

63

## SPIN LOCK IMPLEMENTATION

- Operate without atomic-as a *unit* assembly instructions
- “Do-it-yourself” Locks
- Is this lock implementation: (1)Correct? (2)Fair? (3)Performant?



```

1  typedef struct __lock_t { int flag; } lock_t;
2
3  void init(lock_t *mutex) {
4      // 0 → lock is available, 1 → held
5      mutex->flag = 0;
6  }
7
8  void lock(lock_t *mutex) {
9      while (mutex->flag == 1) // TEST the flag
10         ; // spin-wait (do nothing)
11     mutex->flag = 1; // now SET it !
12 }
13
14 void unlock(lock_t *mutex) {
15     mutex->flag = 0;
16 }
    
```

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.64

64



DIY: CORRECT?

▪ Correctness requires luck... (e.g. *DIY lock is incorrect*)

| Thread1                                                                | Thread2                                                                          |
|------------------------------------------------------------------------|----------------------------------------------------------------------------------|
| <pre>call lock() while (flag == 1) interrupt: switch to Thread 2</pre> | <pre>call lock() while (flag == 1) flag = 1; interrupt: switch to Thread 1</pre> |
| <pre>flag = 1; // set flag to 1 (too!)</pre>                           |                                                                                  |

▪ Here both threads have “acquired” the lock simultaneously

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.65

65

DIY: PERFORMANT?

```
void lock(lock_t *mutex)
{
  while (mutex->flag == 1); // while lock is unavailable, wait...
  mutex->flag = 1;
}
```

▪ What is wrong with while(<cond>); ?

▪ Spin-waiting wastes time actively waiting for another thread

▪ while (1); will “peg” a CPU core at 100%

- Continuously loops, and evaluates mutex->flag value...
- Generates heat...

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.66

66

## OBJECTIVES – 4/25

- Questions from 4/20
- C Tutorial - Pointers, Strings, Exec in C - Due Fri Apr 28
- Assignment 1 - Due Tue May 9
- Quiz 1 (Due Thur Apr 27) – Quiz 2 (Due Tue May 2)
- Chapter 26: Concurrency: An Introduction
  - Race condition
  - Critical section
- Chapter 27: Linux Thread API
  - pthread\_create/\_join
  - pthread\_mutex\_lock/\_unlock/\_trylock/\_timelock
  - pthread\_cond\_wait/\_signal/\_broadcast
- Chapter 28: Locks
  - Introduction, Lock Granularity
  - Spin Locks, **Test and Set**, Compare and Swap
- Chapter 29: Lock Based Data Structures
  - Sloppy Counter
  - Concurrent Structures: Linked List, Queue, Hash Table

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.67

67

## TEST-AND-SET INSTRUCTION

- Hardware support required for working locks
  - Book presents pseudo code of C implementation
    - TEST-and-SET adds a simple check to the basic spin lock
    - Assumption is this “C code” runs atomically on CPU:
- ```
1  int TestAndSet(int *ptr, int new) {
2      int old = *ptr; // fetch old value at ptr
3      *ptr = new;     // store 'new' into ptr
4      return old;     // return the old value
5  }
```
- lock() method checks that TestAndSet doesn't return 1
  - Comparison is in the caller
  - Can implement the C version (non-atomic) and have some success on a single-core VM

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.68

68

## DIY: TEST-AND-SET - 2

- C version: requires preemptive scheduler on single core system
- Lock is never released without a context switch
- single-core VM: occasionally will deadlock, doesn't miscount

```
1  typedef struct __lock_t {
2      int flag;
3  } lock_t;
4
5  void init(lock_t *lock) {
6      // 0 indicates that lock is available,
7      // 1 that it is held
8      lock->flag = 0;
9  }
10
11 void lock(lock_t *lock) {
12     while (TestAndSet(&lock->flag, 1) == 1)
13         ; // spin-wait
14 }
15
16 void unlock(lock_t *lock) {
17     lock->flag = 0;
18 }
```

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.69

69

## SPIN LOCK EVALUATION

- **Correctness:**
  - Spin locks with atomic Test-and-Set:  
Critical sections won't be executed simultaneously by (2) threads
- **Fairness:**
  - No fairness guarantee. Once a thread has a lock, nothing forces it to relinquish it...
- **Performance:**
  - Spin locks perform "busy waiting"
  - Spin locks are best for short periods of waiting (< 1 time quantum)
  - Performance is slow when multiple threads share a CPU
    - Especially if "spinning" for long periods

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.70

70

OBJECTIVES – 4/25

- Questions from 4/20
- C Tutorial - Pointers, Strings, Exec in C - Due Fri Apr 28
- Assignment 1 - Due Tue May 9
- Quiz 1 (Due Thur Apr 27) – Quiz 2 (Due Tue May 2)
- Chapter 26: Concurrency: An Introduction
  - Race condition
  - Critical section
- Chapter 27: Linux Thread API
  - pthread\_create/\_join
  - pthread\_mutex\_lock/\_unlock/\_trylock/\_timelock
  - pthread\_cond\_wait/\_signal/\_broadcast
- Chapter 28: Locks
  - Introduction, Lock Granularity
  - Spin Locks, Test and Set, **Compare and Swap**
- Chapter 29: Lock Based Data Structures
  - Sloppy Counter
  - Concurrent Structures: Linked List, Queue, Hash Table

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.71

71

COMPARE AND SWAP

- Checks that the lock variable has the expected value FIRST, before changing its value
  - If so, make assignment
  - Return value at location
- Adds a comparison to TestAndSet
  - Textbook presents C pseudo code
  - Assumption is that the compare-and-swap method runs atomically
- Useful for wait-free synchronization
  - Supports implementation of shared data structures which can be updated atomically (*as a unit*) using the HW support CompareAndSwap instruction
  - Shared data structure updates become “wait-free”
  - Upcoming in Chapter 32

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.72

72

## COMPARE AND SWAP

- Compare and Swap

```
1 int CompareAndSwap(int *ptr, int expected, int new) {
2     int actual = *ptr;
3     if (actual == expected)
4         *ptr = new;
5     return actual;
6 }
```
- Spin lock

C implementation 1-core VM:  
Count is correct, no deadlock

```
1
2
3     ; // spin
4 }
```
- X86 provides “`cmpxchg1`” compare-and-exchange instruction
  - `cmpxchg8b`
  - `cmpxchg16b`

April 25, 2023	TCSS422: Operating Systems [Spring 2023] School of Engineering and Technology, University of Washington - Tacoma	L9.73
----------------	---	-------

73

### When implementing locks in a high-level language (e.g. C), what is missing that prevents implementation of CORRECT locks?

- Shared state variable
- Condition variables
- ATOMIC instructions
- Fairness
- None of the above

Start the presentation to see live content. For screen share software, share the entire screen. Get help at [pollev.com/app](https://pollev.com/app)

74

## TWO MORE “LOCK BUILDING” CPU INSTRUCTIONS

- Cooperative instructions used together to support synchronization on RISC systems
- No support on x86 processors
  - Supported by RISC: Alpha, PowerPC, ARM
- Load-linked (LL)
  - Loads value into register
  - Same as typical load
  - Used as a mechanism to track competition
- Store-conditional (SC)
  - Performs “mutually exclusive” store
  - Allows only one thread to store value

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.75

75

## LL/SC LOCK

```
1  int LoadLinked(int *ptr) {
2      return *ptr;
3  }
4
5  int StoreConditional(int *ptr, int value) {
6      if (no one has updated *ptr since the LoadLinked to this address) {
7          *ptr = value;
8          return 1; // success!
9      } else {
10         return 0; // failed to update
11     }
12 }
```

- LL instruction loads pointer value (ptr)
- SC only stores if the load link pointer has not changed
- Requires HW support
  - C code is psuedo code

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.76

76

LL/SC LOCK - 2

```
1 void lock(lock_t *lock) {
2     while (1) {
3         while (LoadLinked(&lock->flag) == 1)
4             ; // spin until it's zero
5         if (StoreConditional(&lock->flag, 1) == 1)
6             return; // if set-it-to-1 was a success: all done
7                     // otherwise: try it all over again
8     }
9 }
10
11 void unlock(lock_t *lock) {
12     lock->flag = 0;
13 }
```

Two instruction lock


April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.77

77

CHAPTER 29 –  
LOCK BASED  
DATA STRUCTURES



April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.78

78

OBJECTIVES – 4/25

- Questions from 4/20
- C Tutorial - Pointers, Strings, Exec in C - Due Fri Apr 28
- Assignment 1 - Due Tue May 9
- Quiz 1 (Due Thur Apr 27) – Quiz 2 (Due Tue May 2)
- Chapter 26: Concurrency: An Introduction
  - Race condition
  - Critical section
- Chapter 27: Linux Thread API
  - pthread\_create/\_join
  - pthread\_mutex\_lock/\_unlock/\_trylock/\_timelock
  - pthread\_cond\_wait/\_signal/\_broadcast
- Chapter 28: Locks
  - Introduction, Lock Granularity
  - Spin Locks, Test and Set, Compare and Swap
- Chapter 29: Lock Based Data Structures
  - Sloppy Counter
  - Concurrent Structures: Linked List, Queue, Hash Table

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.79

79

LOCK-BASED  
CONCURRENT DATA STRUCTURES

- Adding locks to data structures make them thread safe.
- Considerations:
  - Correctness
  - Performance
  - Lock granularity

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.80

80



## COUNTER STRUCTURE W/O LOCK

- Synchronization weary --- not thread safe

```
1  typedef struct __counter_t {
2      int value;
3  } counter_t;
4
5  void init(counter_t *c) {
6      c->value = 0;
7  }
8
9  void increment(counter_t *c) {
10     c->value++;
11 }
12
13 void decrement(counter_t *c) {
14     c->value--;
15 }
16
17 int get(counter_t *c) {
18     return c->value;
19 }
```

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.81

81

## CONCURRENT COUNTER

```
1  typedef struct __counter_t {
2      int value;
3      pthread_lock_t lock;
4  } counter_t;
5
6  void init(counter_t *c) {
7      c->value = 0;
8      Pthread_mutex_init(&c->lock, NULL);
9  }
10
11 void increment(counter_t *c) {
12     Pthread_mutex_lock(&c->lock);
13     c->value++;
14     Pthread_mutex_unlock(&c->lock);
15 }
16
```

- Add lock to the counter
- Require lock to change data

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.82

82

CONCURRENT COUNTER - 2

- Decrease counter
- Get value

```
(Cont.)
17  void decrement(counter_t *c) {
18      pthread_mutex_lock(&c->lock);
19      c->value--;
20      pthread_mutex_unlock(&c->lock);
21  }
22
23  int get(counter_t *c) {
24      pthread_mutex_lock(&c->lock);
25      int rc = c->value;
26      pthread_mutex_unlock(&c->lock);
27      return rc;
28  }
```

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.83

83

CONCURRENT COUNTERS - PERFORMANCE

- iMac: four core Intel 2.7 GHz i5 CPU
- Each thread increments counter 1,000,000 times

Threads	Precise (seconds)	Sloppy (seconds)
1	0	0
2	5.5	0
3	9.5	0
4	12.5	0

Traditional vs. sloppy counter  
Sloppy Threshold (S) = 1024

Synchronized counter scales poorly.

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.84

84

PERFECT SCALING

- Achieve (N) performance gain with (N) additional resources
- Throughput:
  - Transactions per second (tps)
- 1 core
  - N = 100 tps
- 10 cores (x10)
  - N = 1000 tps (x10)

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.85

85

OBJECTIVES – 4/25

- Questions from 4/20
- C Tutorial - Pointers, Strings, Exec in C - Due Fri Apr 28
- Assignment 1 - Due Tue May 9
- Quiz 1 (Due Thur Apr 27) – Quiz 2 (Due Tue May 2)
- Chapter 26: Concurrency: An Introduction
  - Race condition
  - Critical section
- Chapter 27: Linux Thread API
  - pthread\_create/\_join
  - pthread\_mutex\_lock/\_unlock/\_trylock/\_timelock
  - pthread\_cond\_wait/\_signal/\_broadcast
- Chapter 28: Locks
  - Introduction, Lock Granularity
  - Spin Locks, Test and Set, Compare and Swap
- Chapter 29: Lock Based Data Structures
  - Sloppy Counter
  - Concurrent Structures: Linked List, Queue, Hash Table

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.86

86

## SLOPPY COUNTER

- Provides single logical shared counter
  - Implemented using local counters for each ~CPU core
    - 4 CPU cores = 4 local counters & 1 global counter
    - Local counters are synchronized via local locks
  - Global counter is updated periodically
    - Global counter has lock to protect global counter value
    - Sloppiness threshold (S):  
Update threshold of global counter with local values
    - Small (S): more updates, more overhead
    - Large (S): fewer updates, more performant, less synchronized
- Why this implementation?  
Why do we want counters local to each CPU Core?

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.87

87

## SLOPPY COUNTER – MAIN POINTS

- Idea of Sloppy Counter is to RELAX the synchronization requirement for counting
  - Instead of synchronizing global count variable each time:  
**counter=counter+1**
  - Synchronization occurs only every so often:  
e.g. *every 1000 counts*
- Relaxing the synchronization requirement drastically reduces locking API overhead by trading-off split-second accuracy of the counter
- Sloppy counter: trade-off accuracy for speed
  - It's sloppy because it's not so accurate (until the end)

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.88

88

SLOPPY COUNTER - 2

- Update threshold ( $S$ ) = 5
- Synchronized across four CPU cores
- Threads update local CPU counters

Time	$L_1$	$L_2$	$L_3$	$L_4$	$G$
0	0	0	0	0	0
1	0	0	1	1	0
2	1	0	2	1	0
3	2	0	3	1	0
4	3	0	3	2	0
5	4	1	3	3	0
6	$5 \rightarrow 0$	1	3	4	5 (from $L_1$ )
7	0	2	4	$5 \rightarrow 0$	10 (from $L_4$ )

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.89

89

THRESHOLD VALUE  $S$

- Consider 4 threads increment a counter 1000000 times each
- Low  $S \rightarrow$  What is the consequence?
- High  $S \rightarrow$  What is the consequence?

Sloppiness	Time (seconds)
1	12
2	6
4	3
8	1.5
16	0.8
32	0.4
64	0.2
128	0.1
256	0.05
512	0.02
1024	0.01

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.90

90

SLOPPY COUNTER - EXAMPLE

- Example implementation
- Also with CPU affinity

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.91

91

OBJECTIVES – 4/25

- Questions from 4/20
- C Tutorial - Pointers, Strings, Exec in C - Due Fri Apr 28
- Assignment 1 - Due Tue May 9
- Quiz 1 (Due Thur Apr 27) – Quiz 2 (Due Tue May 2)
- Chapter 26: Concurrency: An Introduction
  - Race condition
  - Critical section
- Chapter 27: Linux Thread API
  - pthread\_create/\_join
  - pthread\_mutex\_lock/\_unlock/\_trylock/\_timelock
  - pthread\_cond\_wait/\_signal/\_broadcast
- Chapter 28: Locks
  - Introduction, Lock Granularity
  - Spin Locks, Test and Set, Compare and Swap
- Chapter 29: Lock Based Data Structures
  - Sloppy Counter
  - **Concurrent Structures: Linked List, Queue, Hash Table**

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.92

92

## CONCURRENT LINKED LIST - 1

- Simplification - only basic list operations shown
- Structs and initialization:

```
1 // basic node structure
2 typedef struct __node_t {
3     int key;
4     struct __node_t *next;
5 } node_t;
6
7 // basic list structure (one used per list)
8 typedef struct __list_t {
9     node_t *head;
10    pthread_mutex_t lock;
11 } list_t;
12
13 void List_Init(list_t *L) {
14     L->head = NULL;
15     pthread_mutex_init(&L->lock, NULL);
16 }
17
18 (Cont.)
```

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.93

93

## CONCURRENT LINKED LIST - 2

- Insert – adds item to list
- Everything is critical!
  - There are two unlocks

```
(Cont.)
18 int List_Insert(list_t *L, int key) {
19     pthread_mutex_lock(&L->lock);
20     node_t *new = malloc(sizeof(node_t));
21     if (new == NULL) {
22         perror("malloc");
23         pthread_mutex_unlock(&L->lock);
24         return -1; // fail
25     }
26     new->key = key;
27     new->next = L->head;
28     L->head = new;
29     pthread_mutex_unlock(&L->lock);
30     return 0; // success
31 }
32
33 (Cont.)
```

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.94

94

## CONCURRENT LINKED LIST - 3

- Lookup – checks list for existence of item with key
- Once again everything is critical
  - Note - there are also two unlocks

```
(Cont.)
32
32  int List_Lookup(list_t *L, int key) {
33      pthread_mutex_lock(&L->lock);
34      node_t *curr = L->head;
35      while (curr) {
36          if (curr->key == key) {
37              pthread_mutex_unlock(&L->lock);
38              return 0; // success
39          }
40          curr = curr->next;
41      }
42      pthread_mutex_unlock(&L->lock);
43      return -1; // failure
44  }
```

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.95

95

## CONCURRENT LINKED LIST

- First Implementation:
  - Lock **everything** inside Insert() and Lookup()
  - If malloc() fails lock must be released
    - Research has shown “**exception-based control flow**” to be error prone
    - 40% of Linux OS bugs occur in rarely taken code paths
    - Unlocking in an exception handler is considered a poor coding practice
    - There is nothing specifically wrong with this example however
- Second Implementation ...

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.96

96



## CCL – SECOND IMPLEMENTATION

### ■ Init and Insert

```
1  void List_Init(list_t *L) {
2      L->head = NULL;
3      pthread_mutex_init(&L->lock, NULL);
4  }
5
6  void List_Insert(list_t *L, int key) {
7      // synchronization not needed
8      node_t *new = malloc(sizeof(node_t));
9      if (new == NULL) {
10         perror("malloc");
11         return;
12     }
13     new->key = key;
14
15     // just lock critical section
16     pthread_mutex_lock(&L->lock);
17     new->next = L->head;
18     L->head = new;
19     pthread_mutex_unlock(&L->lock);
20 }
21
```

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.97

97

## CCL – SECOND IMPLEMENTATION - 2

### ■ Lookup

```
(Cont.)
22 int List_Lookup(list_t *L, int key) {
23     int rv = -1;
24     pthread_mutex_lock(&L->lock);
25     node_t *curr = L->head;
26     while (curr) {
27         if (curr->key == key) {
28             rv = 0;
29             break;
30         }
31         curr = curr->next;
32     }
33     pthread_mutex_unlock(&L->lock);
34     return rv; // now both success and failure
35 }
```

April 25, 2023


TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.98

98

CONCURRENT LINKED LIST PERFORMANCE

- Using a single lock for entire list is not very performant
- Users must “wait” in line for a single lock to access/modify any item
- Hand-over-hand-locking (lock coupling)
  - Introduce a lock for each node of a list
  - Traversal involves handing over previous node’s lock, acquiring the next node’s lock...
  - Improves lock granularity
  - Degrades traversal performance
- Consider hybrid approach
  - Fewer locks, but more than 1
  - Best lock-to-node distribution?



April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.99

99

OBJECTIVES – 4/25

- Questions from 4/20
- C Tutorial - Pointers, Strings, Exec in C - Due Fri Apr 28
- Assignment 1 - Due Tue May 9
- Quiz 1 (Due Thur Apr 27) – Quiz 2 (Due Tue May 2)
- Chapter 26: Concurrency: An Introduction
  - Race condition
  - Critical section
- Chapter 27: Linux Thread API
  - pthread\_create/\_join
  - pthread\_mutex\_lock/\_unlock/\_trylock/\_timelock
  - pthread\_cond\_wait/\_signal/\_broadcast
- Chapter 28: Locks
  - Introduction, Lock Granularity
  - Spin Locks, Test and Set, Compare and Swap
- Chapter 29: Lock Based Data Structures
  - Sloppy Counter
  - Concurrent Structures: Linked List, Queue Hash Table

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.100

100

## MICHAEL AND SCOTT CONCURRENT QUEUES

- Improvement beyond a single master lock for a queue (FIFO)
- Two locks:
  - One for the **head** of the queue
  - One for the **tail**
- Synchronize enqueue and dequeue operations
- Add a dummy node
  - Allocated in the queue initialization routine
  - Supports separation of head and tail operations
- Items can be added and removed by separate threads at the same time

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.101

101

## CONCURRENT QUEUE

- Remove from queue

```
1  typedef struct __node_t {
2      int value;
3      struct __node_t *next;
4  } node_t;
5
6  typedef struct __queue_t {
7      node_t *head;
8      node_t *tail;
9      pthread_mutex_t headLock;
10     pthread_mutex_t tailLock;
11 } queue_t;
12
13 void Queue_Init(queue_t *q) {
14     node_t *tmp = malloc(sizeof(node_t));
15     tmp->next = NULL;
16     q->head = q->tail = tmp;
17     pthread_mutex_init(&q->headLock, NULL);
18     pthread_mutex_init(&q->tailLock, NULL);
19 }
20
(Cont.)
```

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.102

102

CONCURRENT QUEUE - 2

■ Add to queue

(Cont.)

```
21 void Queue_Enqueue(queue_t *q, int value) {
22     node_t *tmp = malloc(sizeof(node_t));
23     assert(tmp != NULL);
24
25     tmp->value = value;
26     tmp->next = NULL;
27
28     pthread_mutex_lock(&q->tailLock);
29     q->tail->next = tmp;
30     q->tail = tmp;
31     pthread_mutex_unlock(&q->tailLock);
32 }
```

(Cont.)

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.103

103

OBJECTIVES – 4/25

■ Questions from 4/20

■ C Tutorial - Pointers, Strings, Exec in C - Due Fri Apr 28

■ Assignment 1 - Due Tue May 9

■ Quiz 1 (Due Thur Apr 27) – Quiz 2 (Due Tue May 2)

■ Chapter 26: Concurrency: An Introduction

- Race condition
- Critical section

■ Chapter 27: Linux Thread API

- pthread\_create/\_join
- pthread\_mutex\_lock/\_unlock/\_trylock/\_timelock
- pthread\_cond\_wait/\_signal/\_broadcast

■ Chapter 28: Locks

- Introduction, Lock Granularity
- Spin Locks, Test and Set, Compare and Swap

■ Chapter 29: Lock Based Data Structures

- Sloppy Counter
- Concurrent Structures: Linked List, Queue, Hash Table

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.104

104

CONCURRENT HASH TABLE

- Consider a simple hash table
  - Fixed (static) size
  - Hash maps to a bucket
    - Bucket is implemented using a concurrent linked list
    - One lock per hash (bucket)
    - Hash bucket is a linked lists

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.105

105

INSERT PERFORMANCE –  
CONCURRENT HASH TABLE

- Four threads – 10,000 to 50,000 inserts
  - iMac with four-core Intel 2.7 GHz CPU

The graph plots Time (seconds) on the y-axis (0 to 15) against Inserts (Thousands) on the x-axis (0 to 40). The Simple Concurrent List (open circles) shows a steep upward curve, starting at approximately 1 second for 10,000 inserts and reaching about 11.5 seconds for 45,000 inserts. The Concurrent Hash Table (crosses) shows a nearly flat line at 0 seconds across the entire range of inserts.

Inserts (Thousands)	Simple Concurrent List (seconds)	Concurrent Hash Table (seconds)
10	~1.0	~0.1
20	~2.5	~0.1
30	~4.5	~0.1
40	~7.5	~0.1
45	~11.5	~0.1

The simple concurrent hash table scales magnificently.

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.106

106

## CONCURRENT HASH TABLE

```
1      #define BUCKETS (101)
2
3      typedef struct __hash_t {
4          list_t lists[BUCKETS];
5      } hash_t;
6
7      void Hash_Init(hash_t *H) {
8          int i;
9          for (i = 0; i < BUCKETS; i++) {
10             List_Init(&H->lists[i]);
11          }
12      }
13
14      int Hash_Insert(hash_t *H, int key) {
15          int bucket = key % BUCKETS;
16          return List_Insert(&H->lists[bucket], key);
17      }
18
19      int Hash_Lookup(hash_t *H, int key) {
20          int bucket = key % BUCKETS;
21          return List_Lookup(&H->lists[bucket], key);
22      }
```

April 25, 2023

TCSS422: Operating Systems [Spring 2023]  
School of Engineering and Technology, University of Washington - Tacoma

L9.107

107

### Which is a major advantage of using concurrent data structures in your programs?

Locks are encapsulated within data structure code ensuring thread safety.

Lock granularity tradeoff already optimized inside data structure

Multiple threads can more easily share data

All of the above

None of the above

Start the presentation to see live content. For screen share software, share the entire screen. Get help at [polllev.com/app](https://polllev.com/app)

108


# LOCK-FREE DATA STRUCTURES

- Lock-free data structures in Java
  - `Java.util.concurrent.atomic` package
  - Classes:
    - `AtomicBoolean`
    - `AtomicInteger`
    - `AtomicIntegerArray`
    - `AtomicIntegerFieldUpdater`
    - `AtomicLong`
    - `AtomicLongArray`
    - `AtomicLongFieldUpdater`
    - `AtomicReference`
  - See: <https://docs.oracle.com/en/java/javase/11/docs/api/java.base/java/util/concurrent/atomic/package-summary.html>

April 25, 2023	TCSS422: Operating Systems [Spring 2023] School of Engineering and Technology, University of Washington - Tacoma	L9.109
----------------	---	--------

109

# QUESTIONS



110