

# TCSS 562: SOFTWARE ENGINEERING FOR CLOUD COMPUTING

## Cloud Enabling Technology

Wes J. Lloyd  
Institute of Technology  
University of Washington - Tacoma



## OBJECTIVES

- Cloud Enabling Technology (Ch. 5 Erl book)

April 16, 2018	TCSS562: Software Engineering for Cloud Computing [Spring 2018] Institute of Technology, University of Washington - Tacoma	L6.2
----------------	---	------

# CLOUD ENABLING TECHNOLOGY

April 16, 2018

TCSS562: Software Engineering for Cloud Computing [Spring 2018]  
Institute of Technology, University of Washington - Tacoma

L6.3

# CLOUD ENABLING TECHNOLOGY

- Broadband networks and internet architecture
- Data center technology
- Virtualization technology
- Multitenant technology
- Web/web services technology

April 16, 2018

TCSS562: Software Engineering for Cloud Computing [Spring 2018]  
Institute of Technology, University of Washington - Tacoma

L6.4

# 1. BROADBAND NETWORKS AND INTERNET ARCHITECTURE


- Clouds must be connected to a network
- Inter-networking: Users' network must connect to cloud's network
- Public cloud computing relies heavily on the **internet**

April 16, 2018

TCSS562: Software Engineering for Cloud Computing [Spring 2018]  
Institute of Technology, University of Washington - Tacoma

L6.5

# PRIVATE CLOUD NETWORKING

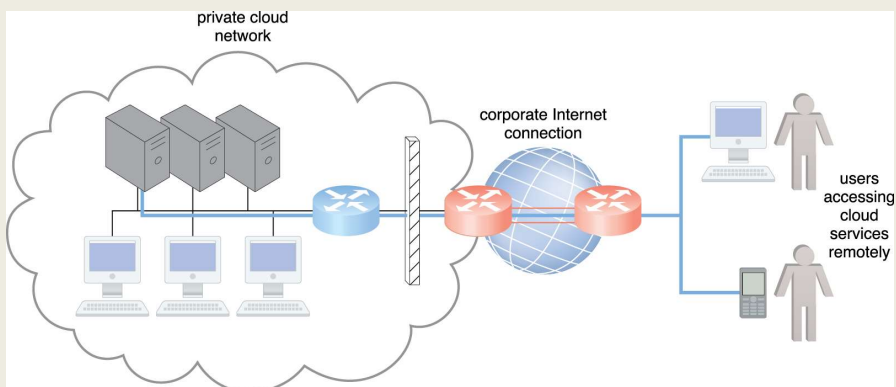

April 16, 2018

TCSS562: Software Engineering for Cloud Computing [Spring 2018]  
Institute of Technology, University of Washington - Tacoma

L6.6

## PUBLIC CLOUD NETWORKING

The diagram illustrates the architecture of public cloud networking. It features a central 'corporate Internet connection' represented by a globe with two red routers. To the left, a 'cloud consumer network' contains servers and desktop computers labeled 'cloud consumers'. To the right, 'users accessing cloud services remotely' are shown with a laptop and a smartphone. Below the Internet connection, a 'cloud provider network' is depicted as a cloud containing server racks. A 'cloud provider Internet connection' with two red routers links the provider network to the corporate Internet connection. A vertical dashed line separates the consumer network from the Internet connection.

April 16, 2018	TCSS562: Software Engineering for Cloud Computing [Spring 2018] Institute of Technology, University of Washington - Tacoma	L6.7
----------------	---	------

## INTERNETWORKING KEY POINTS

- Cloud consumers and providers typically communicate via the internet
- Decentralized provisioning and management model is not controlled by the cloud consumers or providers
- Inter-networking (internet) relies on connectionless packet switching and route-based interconnectivity
- Routers and switches support communication
- Network bandwidth and latency influence QoS, which is heavily impacted by network congestion

April 16, 2018	TCSS562: Software Engineering for Cloud Computing [Spring 2018] Institute of Technology, University of Washington - Tacoma	L6.8
----------------	---	------

## 2. DATA CENTER TECHNOLOGY

- Grouping servers together:
- Enables power sharing
- Higher efficiency in shared IT resource usage (less duplication of effort)
- Improved accessibility and organization
  
- Key components:
  - Virtualized and physical server resources
  - Standardized, modular hardware
  - Automation support: ease server provisioning, configuration, patching, monitoring without supervision... *tools are desirable*



April 16, 2018      TCS562: Software Engineering for Cloud Computing [Spring 2018]  
 Institute of Technology, University of Washington - Tacoma      L6.9

## CLUSTER MANAGEMENT TOOLS



**Hyak Cluster  
 UW-Seattle**

April 16, 2018      TCS562: Software Engineering for Cloud Computing [Spring 2018]  
 Institute of Technology, University of Washington - Tacoma      L6.10

## DATA CENTER TECHNOLOGY – KEY COMPONENTS

- Remote operation / management
- **High availability support:** \*\*redundant everything\*\*  
Includes: power supplies, cabling, environmental control systems, communication links, duplicate warm replica hardware
- **Secure design:** physical and logical access control
- **Servers:** rackmount, etc.
- **Storage:** hard disk arrays (RAID), storage area network (SAN): disk array with dedicated network, network attached storage (NAS): disk array on network for NFS, etc.
- **Network hardware:** backbone routers (WAN to LAN connectivity), firewalls, VPN gateways, managed switches/routers

April 16, 2018

TCSS562: Software Engineering for Cloud Computing [Spring 2018]  
Institute of Technology, University of Washington - Tacoma

L6.11

## 3. VIRTUALIZATION TECHNOLOGY

- Convert a physical IT resource into a virtual IT resource
- Servers, storage, network, power (virtual UPSs)
- Virtualization supports:
  - Hardware independence
  - Server consolidation
  - Resource replication
  - Resource pooling
  - Elastic scalability
- Virtual servers
  - Operating-system based virtualization
  - Hardware-based virtualization

April 16, 2018


TCSS562: Software Engineering for Cloud Computing [Spring 2018]  
Institute of Technology, University of Washington - Tacoma

L6.12

## KEY VIRTUALIZATION TRADEOFF

- What is the tradeoff space?

**Hardware  
Abstraction**




**PERFORMANCE  
TRADEOFF**

**Overhead**

April 16, 2018	TCSS562: Software Engineering for Cloud Computing [Spring 2018] Institute of Technology, University of Washington - Tacoma	L6.13
----------------	---	-------

## TYPE 1 HYPERVISOR

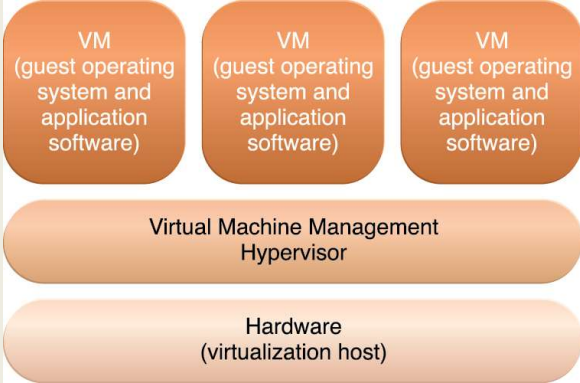

VM (guest operating system and application software)

VM (guest operating system and application software)

VM (guest operating system and application software)

Virtual Machine Management Hypervisor

Hardware (virtualization host)

April 16, 2018	TCSS562: Software Engineering for Cloud Computing [Spring 2018] Institute of Technology, University of Washington - Tacoma	L6.14
----------------	---	-------

## TYPE 1 HYPERVISOR

- Acts as a control program
- Miniature OS kernel that manages VMs
- Boots and runs on bare metal
- Also known as Virtual Machine Monitor (VMM)
- **Paravirtualization:** Kernel includes I/O drivers
- VM guest OSes must use special kernel to interoperate
- Kernel traps instructions (i.e. device I/O) to implement sharing & multiplexing
- User mode instructions run directly on the CPU
- **Objective: minimize virtualization overhead**
- Classic example is XEN (dom0 kernel)

April 16, 2018

TCSS562: Software Engineering for Cloud Computing [Spring 2018]  
Institute of Technology, University of Washington - Tacoma

L6.15

## COMMON VMMS: PARAVIRTUALIZATION


- XEN
- Citrix Xen-server (a commercial version of XEN)
- VMWare ESX (commercial)
- VMWare ESXi (free)
  
- Paravirtual I/O drivers introduced
  - KVM
  - Virtualbox

April 16, 2018

TCSS562: Software Engineering for Cloud Computing [Spring 2018]  
Institute of Technology, University of Washington - Tacoma

L6.16



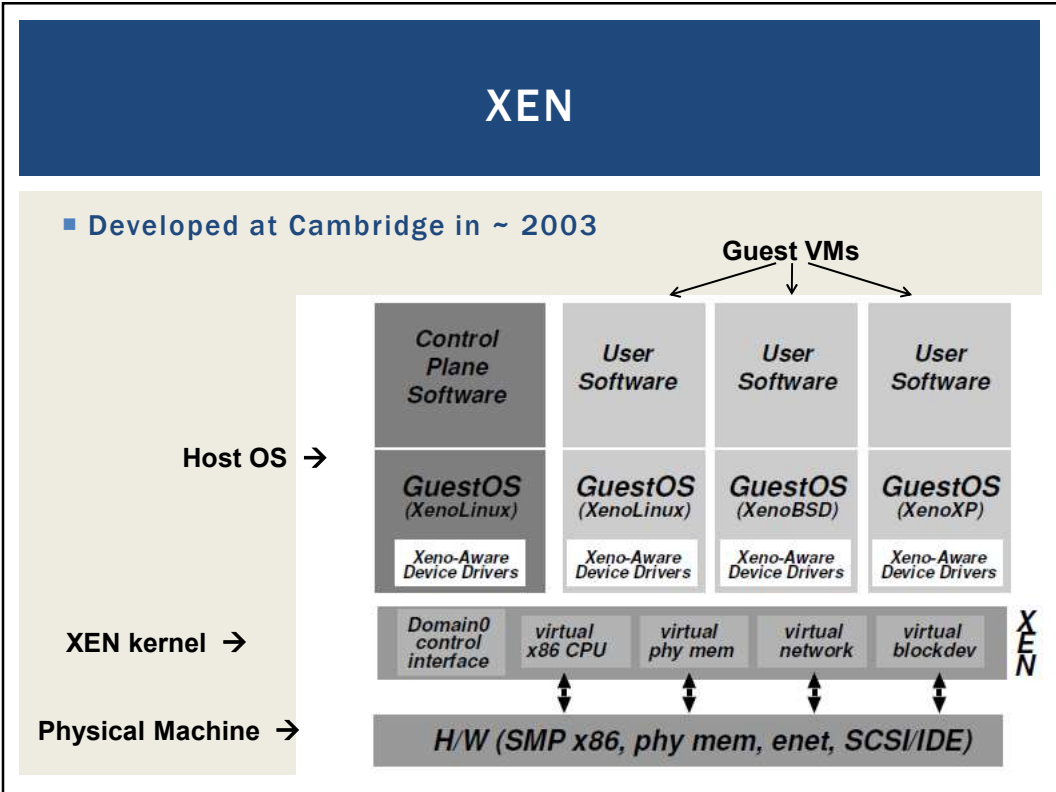

## XEN - 2

- VMs managed as “domains”
- Domain 0 is the hypervisor domain
  - Host OS is installed to run on bare-metal, but doesn't directly facilitate virtualization (*unlike KVM*)
- Domains 1..n are guests (VMs) - not bare-metal

```
xentop - 17:53:48 Xen 3.1.2-398.el5
3 domains: 1 running, 2 blocked, 0 paused, 0 crashed, 0 dying, 0 shutdown
Mem: 8379564k total, 8377876k used, 1688k free CPUs: 4 @ 2400MHz
```

NAME	STATE	CPU(sec)	CPU(%)	MEM(k)	MEM(%)	MAXMEM(k)	MAXMEM(%)	VCPUS
NETS	NETTX(k)	NETRX(k)	VBDS	VBD OO	VBD RD	VBD WR	SSID	
centos	--b---	46	0.0	532352	6.4	1064960	12.7	1
1	27960	885	1	0	6313	37119	0	
centos-2	--b---	17	0.0	1056640	12.6	2113536	25.2	1
1	50	0	1	0	3981	541	0	
Domain-0	-----r	2979	19.3	6568960	78.4	no limit	n/a	4
4	1057374	290072	0	0	0	0	0	

April 16, 2018

TCSS562: Software Engineering for Cloud Computing [Spring 2018]  
Institute of Technology, University of Washington - Tacoma

L6.18

## XEN - 3

- Physical machine boots special XEN kernel
- Kernel provides paravirtual API to manage CPU & device multiplexing
- Guests require modified XEN-aware kernels
- Xen supports full-virtualization for unmodified OS guests in hvm mode
- Amazon EC2 largely based on modified version of XEN hypervisor (EC2 gens 1-4)
- XEN provides its own CPU schedulers, I/O scheduling


April 16, 2018

TCS562: Software Engineering for Cloud Computing [Spring 2018]  
Institute of Technology, University of Washington - Tacoma

L6.19

## TYPE 2 HYPERVISOR

- Adds additional layer

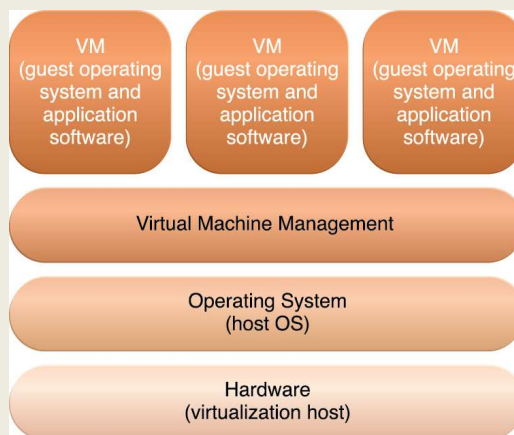

April 16, 2018

TCS562: Software Engineering for Cloud Computing [Spring 2018]  
Institute of Technology, University of Washington - Tacoma

L6.20

## TYPE 2 HYPERVISOR

- **Problem: Original x86 CPUs could not trap special instructions**
- **Instructions not specially marked**
- **Solution: Full Virtualization**
- **Trap ALL instructions**
- **“Fully” simulate entire computer**
- **Tradeoff: Higher Overhead**
- **Benefit: Can virtualize any operating system without modification**

April 16, 2018

TCSS562: Software Engineering for Cloud Computing [Spring 2018]  
Institute of Technology, University of Washington - Tacoma

L6.21


## KERNEL BASED VIRTUAL MACHINES (KVM)

- **x86 HW notoriously difficult to virtualize**
- **Extensions added to 64-bit Intel/AMD CPUs**
  - **Provides hardware assisted virtualization**
  - **New “guest” operating mode**
  - **Hardware state switch**
  - **Exit reason reporting**
  - **Intel/AMD implementations different**
    - **Linux uses vendor specific kernel modules**

April 16, 2018

TCSS562: Software Engineering for Cloud Computing [Spring 2018]  
Institute of Technology, University of Washington - Tacoma

L6.22

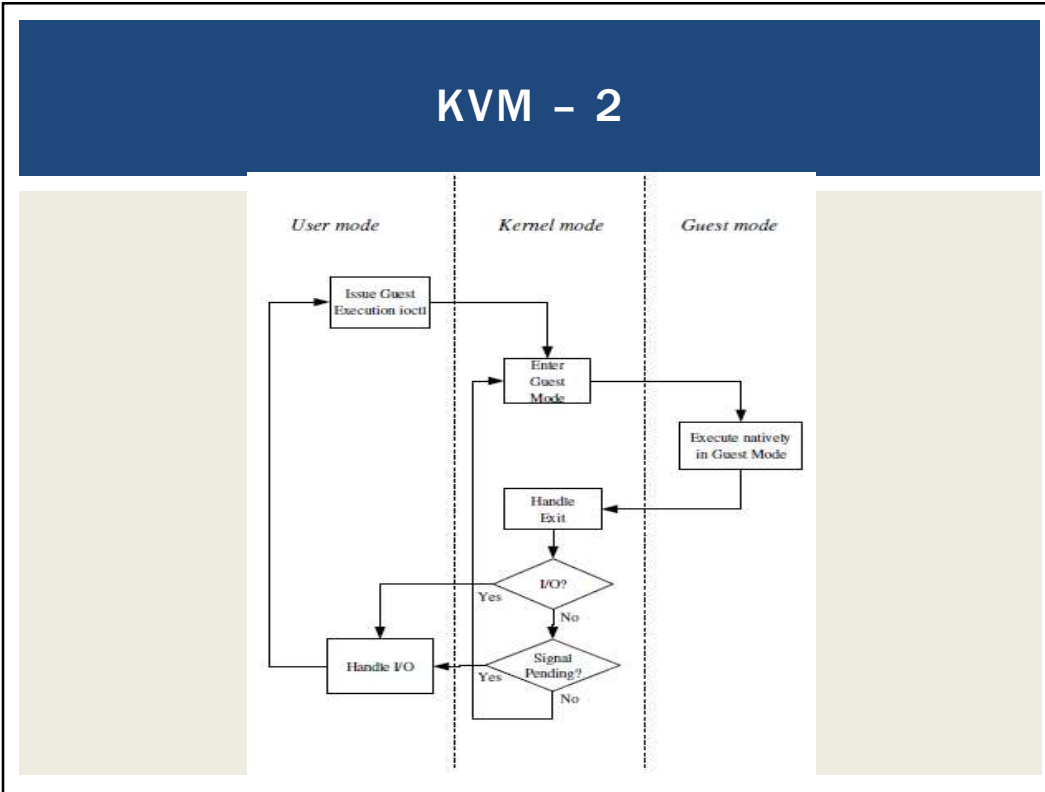

## KVM - 3

- **KVM has /dev/kvm device file node**
  - **Linux character device, with operations:**
    - Create new VM
    - Allocate memory to VM
    - Read/write virtual CPU registers
    - Inject interrupts into vCPUs
    - Running vCPUs
- **VMs run as Linux processes**
  - Scheduled by host Linux OS
  - Can be pinned to specific cores with “taskset”

April 16, 2018	TCSS562: Software Engineering for Cloud Computing [Spring 2018] Institute of Technology, University of Washington - Tacoma	L6.24
----------------	---	-------

## KVM PARAVIRTUALIZED I/O

- **KVM - Virtio**
  - Custom Linux based paravirtual device drivers
  - Supersedes QEMU hardware emulation (full virt.)
  - Based on XEN paravirtualized I/O
  - Custom block device driver provides paravirtual device emulation
    - Virtual bus (memory ring buffer)
    - Requires hypercall facility
    - Direct access to memory

April 16, 2018

TCS562: Software Engineering for Cloud Computing [Spring 2018]  
Institute of Technology, University of Washington - Tacoma

L6.25

## KVM DIFFERENCES FROM XEN

- **KVM requires CPU VMX support**
  - Virtualization management extensions
- **KVM can virtualize any OS without special kernels**
  - Less invasive
- **KVM was originally separate from the Linux kernel, but then integrated**
- **KVM is type 1 hypervisor because the machine boots Linux which has integrated support for virtualization**
- **Different than XEN because XEN kernel alone is not a full-fledged OS**

April 16, 2018

TCS562: Software Engineering for Cloud Computing [Spring 2018]  
Institute of Technology, University of Washington - Tacoma

L6.26

## KVM ENHANCEMENTS

- Paravirtualized device drivers
  - Virtio
- Guest Symmetric Multiprocessor (SMP) support
  - Leverages multiple on-board CPUs
  - Supported as of Linux 2.6.23
- VM Live Migration
- Linux scheduler integration
  - Optimize scheduler with knowledge that KVM processes are virtual machines

April 16, 2018

TCSS562: Software Engineering for Cloud Computing [Spring 2018]  
Institute of Technology, University of Washington - Tacoma

L6.27

## VIRTUALIZATION MANAGEMENT

- Virtual infrastructure management (VIM) tools
- Tools that manage pools of virtual machines, resources, etc.
- Private cloud software systems can be considered as a VIM
- Considerations:
  - Performance overhead
    - Paravirtualization: custom OS kernels, I/O passed directly to HW w/ special drivers
  - Hardware compatibility for virtualization
  - Portability: virtual resources tend to be difficult to migrate cross-clouds

April 16, 2018

TCSS562: Software Engineering for Cloud Computing [Spring 2018]  
Institute of Technology, University of Washington - Tacoma

L6.28

## VIRTUAL INFRASTRUCTURE MANAGEMENT (VIM)

- Middleware to manage virtual machines and infrastructure of IaaS “clouds”
- Examples
  - OpenNebula
  - Nimbus
  - Eucalyptus
  - OpenStack

April 16, 2018

TCSS562: Software Engineering for Cloud Computing [Spring 2018]  
Institute of Technology, University of Washington - Tacoma

L6.29

## VIM FEATURES

- Create/destroy VM Instances
- Image repository
  - Create/Destroy/Update images
  - Image persistence
- Contextualization of VMs
  - Networking address assignment
    - DHCP / Static IPs
  - Manage SSH keys

April 16, 2018

TCSS562: Software Engineering for Cloud Computing [Spring 2018]  
Institute of Technology, University of Washington - Tacoma

L6.30

## VIM FEATURES - 2

- Virtual network configuration/management
  - Public/Private IP address assignment
  - Virtual firewall management
  - Configure/support isolated VLANs (private clusters)
  
- Support common virtual machine managers (VMMs)
  - XEN, KVM, VMware
  - Support via libvirt library

April 16, 2018

TCSS562: Software Engineering for Cloud Computing [Spring 2018]  
Institute of Technology, University of Washington - Tacoma

L6.31

## VIM FEATURES - 3

- Shared “Elastic” block storage
  - Facility to create/update/delete VM disk volumes
    - Amazon EBS
    - Eucalyptus SC
    - OpenStack Volume Controller

April 16, 2018

TCSS562: Software Engineering for Cloud Computing [Spring 2018]  
Institute of Technology, University of Washington - Tacoma

L6.32



## 4. MULTITENANT APPLICATIONS

- Each tenant (like in an apartment) has their own view of the application
- Tenants are unaware of their neighbors
- Tenants can only access their data, no access to data and configuration that is not their own
- Customizable features
  - UI, business process, data model, access control
- Application architecture
  - User isolation, data security, recovery/backup by tenant, scalability for a tenant, for tenants, metered usage, data tier isolation




April 16, 2018

TCSS562: Software Engineering for Cloud Computing [Spring 2018]  
Institute of Technology, University of Washington - Tacoma

L6.33

## MULTITENANT APPS - 2

- Forms the basis for SaaS (applications)

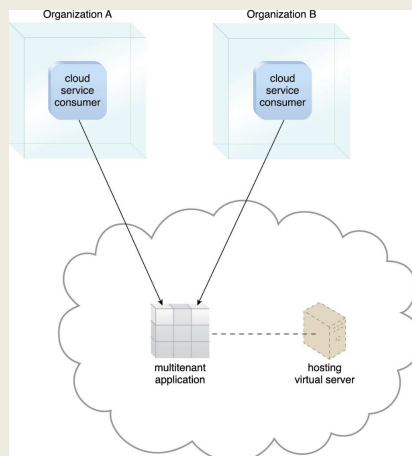

April 16, 2018

TCSS562: Software Engineering for Cloud Computing [Spring 2018]  
Institute of Technology, University of Washington - Tacoma

L6.34

## WEB SERVICES/WEB

- Web services technology is a key foundation of cloud computing's "as-a-service" cloud delivery model
- SOAP – “Simple” object access protocol
  - First generation web services
  - WSDL – web services description language
  - UDDI – universal description discovery and integration
  - SOAP services have their own unique interfaces
- REST – instead of defining a custom technical interface REST services are built on the use of HTTP protocol
- HTTP GET, PUT, POST, DELETE

April 16, 2018

TCSS562: Software Engineering for Cloud Computing [Spring 2018]  
Institute of Technology, University of Washington - Tacoma

L6.35

## HYPertext TRANSPORT PROTOCOL (HTTP)

- An ASCII-based request/reply protocol for transferring information on the web
- HTTP request includes:
  - request method (GET, POST, etc.)
  - Uniform Resource Identifier (URI)
  - HTTP protocol version understood by the client
  - headers—extra info regarding transfer request
- HTTP response from server
  - Protocol version & status code →
  - Response headers
  - Response body

### HTTP status codes:

2xx — *all is well*  
3xx — *resource moved*  
4xx — *access problem*  
5xx — *server error*

April 16, 2018

TCSS562: Software Engineering for Cloud Computing [Spring 2018]  
Institute of Technology, University of Washington - Tacoma

L6.36

## REST: REPRESENTATIONAL STATE TRANSFER

- Web services protocol
- *Supersedes SOAP* – Simple Object Access Protocol
- Access and manipulate web resources with a predefined set of stateless operations (known as web services)
- Requests are made to a URI
- Responses are most often in JSON, but can also be HTML, ASCII text, XML, no real limits as long as text-based
- HTTP verbs: GET, POST, PUT, DELETE, ...

April 16, 2018

TCCS562: Software Engineering for Cloud Computing [Spring 2018]  
Institute of Technology, University of Washington - Tacoma

L6.37

```
// SOAP REQUEST

POST /InStock HTTP/1.1
Host: www.bookshop.org
Content-Type: application/soap+xml; charset=utf-8
Content-Length: nnn

<?xml version="1.0"?>
<soap:Envelope
xmlns:soap="http://www.w3.org/2001/12/soap-envelope"
soap:encodingStyle="http://www.w3.org/2001/12/soap-
encoding">
<soap:Body xmlns:m="http://www.bookshop.org/prices">
  <m:GetBookPrice>
    <m:BookName>The Fleamarket</m:BookName>
  </m:GetBookPrice>
</soap:Body>
</soap:Envelope>
```

April 16, 2018

TCCS562: Software Engineering for Cloud Computing [Spring 2018]  
Institute of Technology, University of Washington - Tacoma

L6.38

```
// SOAP RESPONSE
POST /InStock HTTP/1.1
Host: www.bookshop.org
Content-Type: application/soap+xml; charset=utf-8
Content-Length: nnn

<?xml version="1.0"?>
<soap:Envelope
xmlns:soap="http://www.w3.org/2001/12/soap-envelope"
soap:encodingStyle="http://www.w3.org/2001/12/soap-
encoding">
<soap:Body xmlns:m="http://www.bookshop.org/prices">
  <m:GetBookPriceResponse>
    <m: Price>10.95</m: Price>
  </m:GetBookPriceResponse>
</soap:Body>
</soap:Envelope>
```

April 16, 2018

TCSS562: Software Engineering for Cloud Computing [Spring 2018]  
 Institute of Technology, University of Washington - Tacoma

L6.39

```
// WSDL Service Definition
<?xml version="1.0" encoding="UTF-8"?>
<definitions name="DayOfWeek"
targetNamespace="http://www.roguewave.com/soapworx/examples/DayOfWeek.wsdl"
xmlns:tns="http://www.roguewave.com/soapworx/examples/DayOfWeek.wsdl"
xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns="http://schemas.xmlsoap.org/wsdl/">
  <message name="DayOfWeekInput">
    <part name="date" type="xsd:date"/>
  </message>
  <message name="DayOfWeekResponse">
    <part name="dayOfWeek" type="xsd:string"/>
  </message>
  <portType name="DayOfWeekPortType">
    <operation name="GetDayOfWeek">
      <input message="tns:DayOfWeekInput"/>
      <output message="tns:DayOfWeekResponse"/>
    </operation>
  </portType>
  <binding name="DayOfWeekBinding" type="tns:DayOfWeekPortType">
    <soap:binding style="document"
transport="http://schemas.xmlsoap.org/soap/http"/>
    <operation name="GetDayOfWeek">
      <soap:operation soapAction="getdayofweek"/>
      <input>
        <soap:body use="encoded"
namespace="http://www.roguewave.com/soapworx/examples"
encodingStyle="http://schemas.xmlsoap.org/soap/encoding"/>
      </input>
      <output>
        <soap:body use="encoded"
namespace="http://www.roguewave.com/soapworx/examples"
encodingStyle="http://schemas.xmlsoap.org/soap/encoding"/>
      </output>
    </operation>
  </binding>
  <service name="DayOfWeekService" >
    <documentation>
      Returns the day-of-week name for a given date
    </documentation>
    <port name="DayOfWeekPort" binding="tns:DayOfWeekBinding">
      <soap:address location="http://localhost:8090/dayofweek/DayOfWeek"/>
    </port>
  </service>
</definitions>
```

April 16, 2018

TCSS562: Software Engineering for Cloud Computing [Spring 2018]  
 Institute of Technology, University of Washington - Tacoma

L6.40

## REST CLIMATE SERVICES EXAMPLE

- **USDA Lat/Long Climate Service Demo**

```
// REST/JSON
// Request climate data for Washington
{
  "parameter": [
    {
      "name": "latitude",
      "value": 47.2529
    },
    {
      "name": "longitude",
      "value": -122.4443
    }
  ]
}
```
- **Just provide a Lat/Long**

April 16, 2018

TCS562: Software Engineering for Cloud Computing [Spring 2018]  
Institute of Technology, University of Washington - Tacoma

L6.41

## REST - 2

- App manipulates one or more types of resources.
- Everything the app does can be characterized as some kind of operation on one or more resources.
- Frequently services are **CRUD** operations (create/read/update/delete)
  - Create a new resource
  - Read resource(s) matching criterion
  - Update data associated with some resource
  - Destroy a particular a resource
- Resources are often implemented as objects in OO languages

April 16, 2018

TCS562: Software Engineering for Cloud Computing [Spring 2018]  
Institute of Technology, University of Washington - Tacoma

L6.42

## REST ARCHITECTURAL ADVANTAGES

- **Performance:** component interactions can be the dominant factor in user-perceived performance and network efficiency
- **Scalability:** to support large numbers of services and interactions among them
- **Simplicity:** of the Uniform Interface
- **Modifiability:** of services to meet changing needs (even while the application is running)
- **Visibility:** of communication between services
- **Portability:** of services by redeployment
- **Reliability:** resists failure at the system level as redundancy of infrastructure is easy to ensure

April 16, 2018

TCSS562: Software Engineering for Cloud Computing [Spring 2018]  
Institute of Technology, University of Washington - Tacoma

L6.43

## QUESTIONS



April 16, 2018

TCSS562: Software Engineering for Cloud Computing [Spring 2018]  
Institute of Technology, University of Washington - Tacoma

L6.44